

ZONING ORDINANCE

ORDINANCE NUMBER 2016-09

**AN ORDINANCE OF THE TOWN OF PARADISE VALLEY,
ARIZONA AMENDING THE PARADISE VALLEY ZONING
ORDINANCE, Article XXII, HILLSIDE DEVELOPMENT
REGULATIONS**

**BE IT ORDAINED BY THE MAYOR AND TOWN COUNCIL OF THE TOWN OF
PARADISE VALLEY, ARIZONA:**

Section 1. Article XXII, Hillside Development Regulations, Section 2200- 2209 are hereby amended (with deletions shown as ~~strike throughs~~ and additions shown in **bold type**):

Article XXII. HILLSIDE DEVELOPMENT REGULATIONS ^{110 112 181 193 194 409 425 533 558}
⁶⁵⁴⁵⁸⁰

Section 2200. INTRODUCTION

As valuable scenic resources, Camelback Mountain, Mummy Mountain and the Phoenix Mountains provide a permanent visual presence that exemplifies what is unique about Paradise Valley. They define the location and character of the Town, shape our sense of place and contribute to the Town's identity. These land forms, their foothills, and other areas over a 10% slope, offer a desirable setting visible to the entire metropolitan area and an intrinsic aesthetic value to the Town; therefore they require unique standards resulting from the characteristics of hillside terrain.

Section 2201. PURPOSE

This article exists to establish provisions to: a) regulate the intensity of development; b) preserve and protect the hillside environment; c) provide for the safety and welfare of the Town and its residents; and d) establish rules and procedures for review by the Hillside Building Committee for hillside development, building and construction plans through the implementation of the following:

1. Require building massing to adapt to the natural hillside topography thereby reducing the scarring effects of roads, drives, building pads and cut and fill slopes.
2. Encourage all improvements to be designed and constructed in a manner that minimizes the impact of development from viewpoints on the valley floor and adjacent slopes.
3. Prevent unnecessary grading or stripping of vegetation, preserve drainage patterns, protect the public from natural hazards of storm water runoff and erosion, and require re-vegetation in order to maintain the natural landscape environment.

ZONING ORDINANCE


4. Preserve visual open space, unique natural features, wildlife habitats and retain the integrity and natural states of the identified dominant peaks and ridges.
5. Provide development and construction practices and methods to ensure greater fire protection in hillside development areas.
6. Require limited and efficient use of exterior lighting to maintain minimal night-time lighting levels and preservation of the dark sky.

This Article endeavors to enhance design quality so that the resulting development maintains the essential natural characteristic and context of the hillside consistent with the goals and policies of the Town's General Plan.

Section 2202. IMPLEMENTATION

The provisions of this Article shall apply to all land within a Hillside Development Area as denoted on **FIGURE 2 – HILLSIDE DEVELOPMENT AREA** and to all lands where the natural terrain under the building pad has a slope of ten percent (10%) or greater (see example below), whether shown in Figure 2 or not. However, a 10% or greater slope, in an area not denoted on Figure 2, created by a natural wash on land that would otherwise not be classified as hillside land, shall be exempt from the hillside regulations. Hillside lands are also subject to special provisions relating to lot split and subdivision development as set forth in the subdivision code. If there is a conflict between the Hillside Development provisions and another section of this Ordinance or the Town Code, these provisions shall prevail.

FIGURE 1 – 10% SLOPE

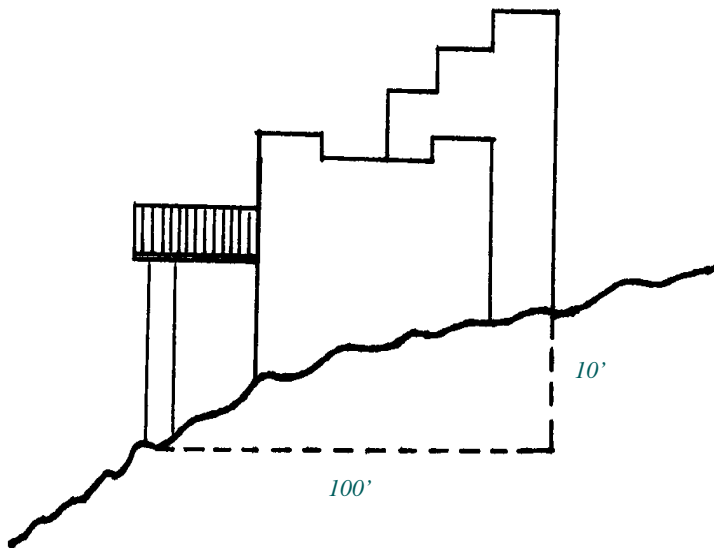


ZONING ORDINANCE

FIGURE 2 – HILLSIDE DEVELOPMENT AREA

DRAFT

ZONING ORDINANCE

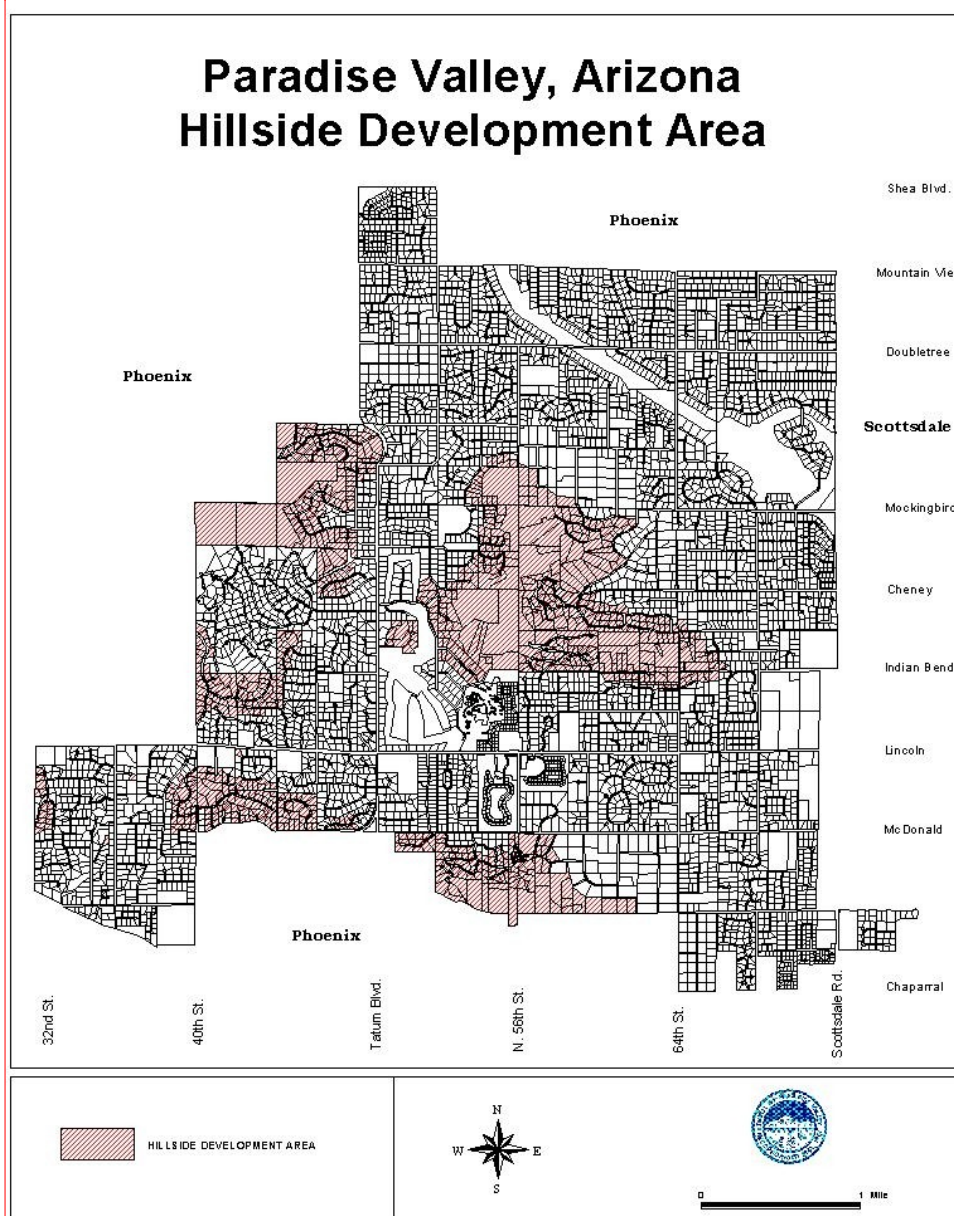


Comment [GB1]: Identify Process to Update Map with any properties removed from Hillside or added to Hillside

FIGURE 3 – PRIMARY RIDGE LINE DESIGNATION

ZONING ORDINANCE

1500' Elevation and Above

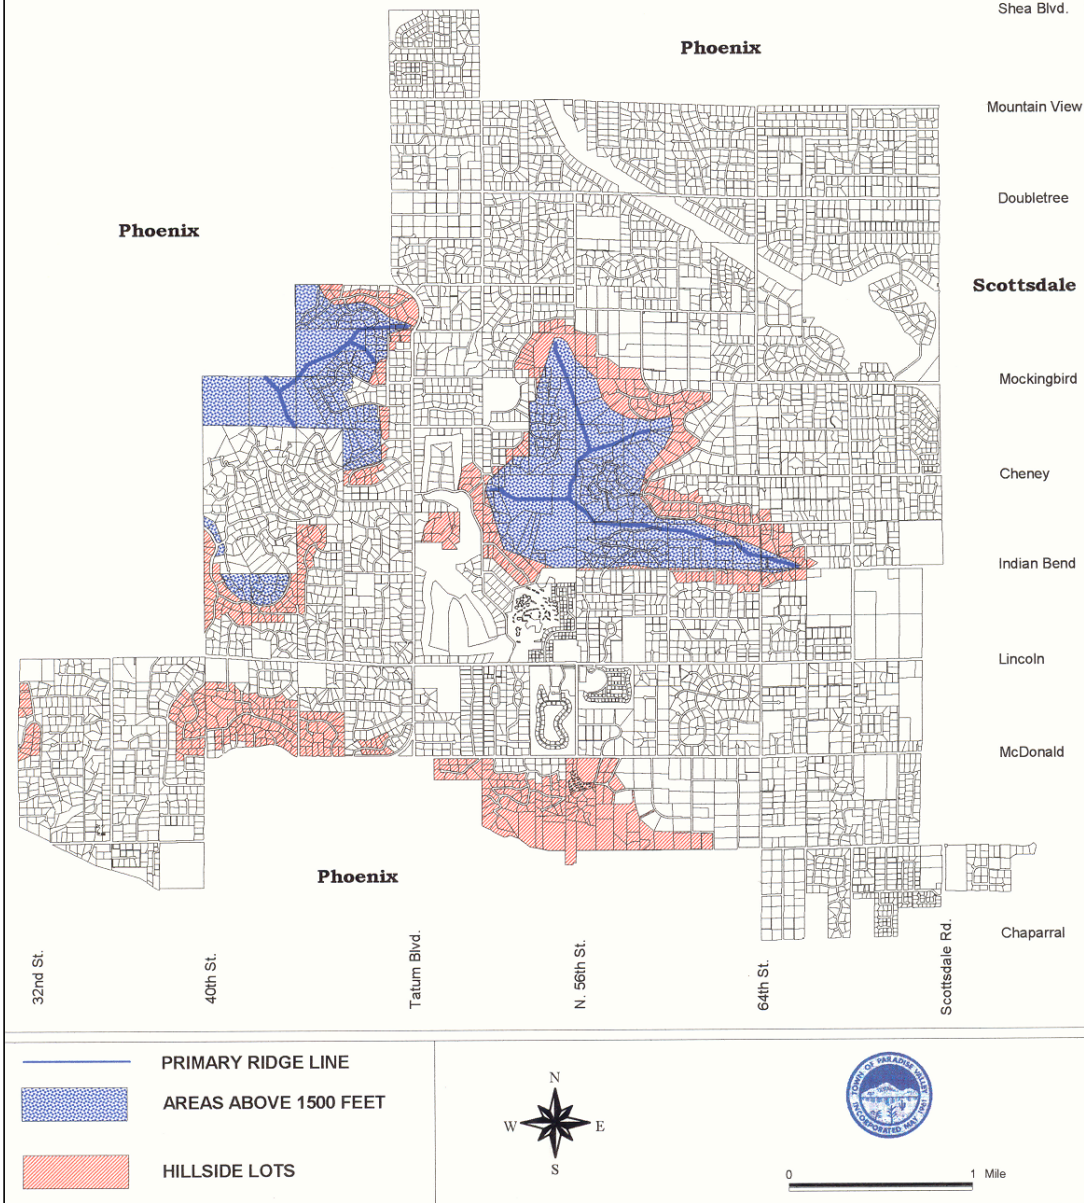

ZONING ORDINANCE

Section 2203 HILLSIDE DEFINITIONS. Where definitions are not defined in this section, the definitions in Article II shall control. For purposes of this Article, the terms contained in the Article shall have the following meanings:

Acre - 43,560 square feet as measured on the horizontal plane.

Alter the Mountain Top Ridge Line –Any Development on the Primary Ridge Line shown on **FIGURE 3** that disturbs or alters the natural mountain top profile.

Applicant – The person or entity desiring to improve or otherwise engage in any Development of property in the Hillside Development Area, including the owner of the property and any agents acting on behalf of the owner.

Building Pad – The total area under roof of all structures proposed for the property.

Building Pad Slope - The percent of slope measured at right angles to the natural contours along a line passing through the center of the proposed building and terminating at the ends of the disturbed area limits of the building site.

Building Site - That portion of the lot or parcel, excluding driveways, upon which a building and appurtenances are to be placed or are already existing, including but not limited to; adequate areas for parking, turnaround areas not separated by driveways, sewage disposal, clearance, and proper drainage which conforms to the requirements of the provisions of this Article and the Town Code.

Cantilever – A rigid structural element of a building, deck, or walking surface that is anchored at one end of a support from which it protrudes. This excludes roof overhangs that do not have a walking surface above them.

Code - The Code of Ordinances of the Town of Paradise Valley, Arizona in effect as of the date of these Regulations and as may be amended.

Commission - The Planning and Zoning Commission of the Town of Paradise Valley.

Committee - The Hillside Building Committee of the Town of Paradise Valley.

Conservation - Retention or acquisition of land for the purpose of preservation in a natural state.

Conservation Easement - A permanent open space easement granted to the Town or to a public land trust to prohibit development of property including roads and utilities and to retain and preserve the land for the scenic enjoyment of the general public.

Council - The Town Council of the Town of Paradise Valley.

Cut - The land surface which is shaped through the removal of soil, rock, or other materials.

Development - Any grading, excavation or construction.

Disturbed Area - That area of natural ground excluding the Footprint of the residence that has been or is proposed to be altered through grading, cut and fill, removal of natural vegetation,

ZONING ORDINANCE

placement of material, trenching, or by any means that causes a change in the undisturbed natural surface of the land or natural vegetation. Reference Section 2207.III.K

Driveway – A paved or unpaved area providing access to the property, located between the right-of-way and the parking area or garage of the property.

Fill - The deposit of soil, rock, or other materials placed by man.

Finished Grade - The final grade and elevation of the ground surface after grading is completed.

Footprint - That area of the residence measured from the outside walls (excluding any overhanging portions) which includes indoor uses such as attached garage, carports, utility room, laundry, etc., but excludes outdoor uses such as patios and breezeways.

Grading - Any excavating, or filling or combination thereof, including the conditions resulting from any excavation or fill.

Hillside Development Area - Those areas marked in **FIGURE 2** and to all lands where the natural terrain under the building pad has a slope of ten percent (10%) or greater, whether shown in **FIGURE 2** or not. However, a 10% or greater slope, in an area not denoted on **Figure 2**, created by a natural wash on land that otherwise would not be classified as hillside land shall be exempt from the hillside regulations.

Hillside Wash – Any creek, stream, wash, arroyo, channel or other body of water having a flow rate equal to or greater than 2 cubic feet per second based on a 100-year storm event.

Lot - A legally subdivided parcel of land occupied or intended for occupancy by one main building, together with any accessory buildings including the open spaces required of the Hillside Regulations and having adequate frontage on a public or private street.

Natural Grade - The undisturbed natural surface of the land, including washes.

Primary Ridge Line - That line running from the highest point along the mountain top downward along a divide to the 1500 foot mean sea level elevation as shown on **FIGURE 3**.

Raised Outdoor Living Area – Uncovered areas such as porches, decks, platforms, and retained areas which extend three (3) feet or more above grade.

Retaining Wall - A wall or terraced combination of walls, including, planters, negative edge pools, used solely to retain more than eighteen inches (18") of material, water, or to support or to provide a foundation or wall for a building.

Raw Spill Slope – An area created by causing or allowing earth or other material to fall, flow or run down the slope, thereby creating a change in the natural appearance and topography.

Sheet Flow – A shallow and wide overland flow of water.

ZONING ORDINANCE

Significant Natural Features - Include Hillside Washes, Significant Vegetation, and Significant Rock Outcroppings provided these features are in their undisturbed natural state.

Significant Rock Outcroppings - Any surface rock or group formation of rocks covering an area of 200 square feet or larger or any surface rock formation with a height greater than ten feet from the surrounding grade.

Significant Vegetation - A single tree or cactus having a height greater than 15 feet or three or more trees or cacti, located within a radius of 15 feet, each having a height greater than 12 feet.

Subterranean - That space which lies totally underground, and which cannot be seen from outside the exterior perimeter of the structure on the same horizontal plane which originates at that point where the building intersects the ground.

Town - The Town of Paradise Valley.

Veneered Rock Slope – A group formation of rocks of similar colors that blend in with the surrounding natural setting.

View Fencing (View Fence) – Fencing that is constructed in such a manner as to achieve ~~70~~ 80% overall openness.

Section 2204 HILLSIDE BUILDING COMMITTEE.

- A. The Hillside Building Committee or Hillside Building Committee Chair as established in Chapter 2 of the Town Code shall review all new applications submitted to the Town for Development and related construction within a Hillside Development Area. No building permit shall be issued for such application until approved by the Committee and then such issuance shall only be in accordance with the plans and specifications approved by the Committee.
- B. The Hillside Building Committee may review applications for additions to existing structures in accordance with Section 2207 (VII)(A) of this Ordinance.
- C. The Hillside Building Committee may review applications for accessory construction (e.g. fences, retaining walls, pools etc.) if the Town Manager or designee in consultation with Hillside Building Committee Chair determines that the proposed construction: (i) creates a significant visual impact; or (ii) proposes an additional disturbance area.
- D. The Hillside Building Committee approval process may consist of the following stages:
 - 1. An Administrative Hillside Chair Review.
 - 2. A Combined Hillside Building Committee Review Meeting.
 - 3. A Conceptual Plan Review Meeting.
 - 4. A Formal Hillside Building Committee Review Meeting.

ZONING ORDINANCE

Section 2205 REVIEW AND DEVELOPMENT PROCESS. The Hillside Building Committee shall review Development plans, as outlined in Section 2204, prior to the issuance of a building, grading or other Development permit. The review and development process consists of up to four stages, depending upon the nature and scope of the proposed Development:

- I. **Administrative Hillside Chair Review:** The Applicant shall submit a completed application and the required fees to the Town. Proposed accessory structures and additions may be reviewed by the Hillside Building Committee Chair provided the proposed improvements do not: (i) exceed or increase the building height of the main residence greater than six(6) feet; (ii) increase the existing building Footprint by more than 100 square feet; (iii) create more than 100 square feet of additional disturbed area; (iv) increase the length of walls by more than 15 lineal feet; (v) propose a significant addition of exterior lighting; or (vi) create a significant adverse visual impact. The Chair shall review the submittal for compliance with the goals, purposes, and specific criteria of this ordinance.
- II. **Combined Hillside Committee Review Meeting:** The Applicant shall submit all materials outlined in Section 2206 (II) to the Town. The Hillside Building Committee shall then review the submittal for compliance with the goals, purposes, and specific criteria of this ordinance and either approve, approve with stipulations or changes, or deny the submittal. ~~Average~~ Minor remodel/additions, site improvements (such as, but not limited to, solar panels, pool and spa additions), shall be reviewed as a Combined Hillside Committee Review.
- III.
- IV. **Concept Plan Review Meeting:** The Applicant, along with their architect and engineer shall submit a completed application and the required fees, to the Town Manager or designee, at the time they request a concept plan review meeting (pre-hillside meeting) with the Hillside Building Committee. All new single family residence and major remodel/additions require a Concept Plan Review Meeting. The purpose of this meeting is to discuss, review, and give suggestions and guidance to the Applicant regarding the proposed development including: the location of the building pad and accessory uses; how these relate to Significant Natural Features; the preservation of existing vegetation; grading concepts and their adaptation to the natural hillside topography; and how the requirements pursuant to these hillside regulations and purpose statement will guide the proposed Development.
- V. **Formal Hillside Committee Review Meeting:** At this stage, in addition to those materials previously submitted, the Applicant shall submit all materials outlined in Section 2206 (II) to the Town Manager or designee. The Hillside Building Committee shall then review the submittal for compliance with the goals, purposes, and specific criteria of this ordinance and either approve, approve with stipulations or changes, or deny the submittal. All new single family residence and major remodel/additions require a Formal Hillside Committee Review Meeting.
- VI. **Building Permit Review:** The final construction plans submitted to the Town Community Development Department for review and approval shall comply with the final approval of the Hillside Building Committee. Any variation from excavation and grading requirements within the Town Code must be accompanied by a soils engineering report

ZONING ORDINANCE

from a testing laboratory or geological engineer approved by the Town Engineer. No site preparation or construction shall commence until the Town has issued a grading, demolition, or building permit.

- A. The plans for any Development in the Hillside Development Area, must be approved by the Town and appropriate legal permit(s) issued before any clearing and grubbing, grading, bulldozing, blasting, or movement of earth is commenced. Building permit application must be submitted within a twelve month period after the date of approval from the Hillside Building Committee or Hillside Building Committee Chair. If a building permit application is not submitted within a twelve month period, the approval shall be null and void. If appropriate, based upon circumstances outside the control of the Applicant, a one-time six (6) month extension may be granted by the Town Manager or designee. If the permit expires, at no time after that expiration period does the applicant have any vested prior approval rights.
- B. When a building, demolition, or grading permit that involves any cut or fill on a hillside property is required under provisions of these Regulations, the Applicant shall first provide the Town with a form of Financial Assurance, and a right of entry and temporary construction easement agreement acceptable to the Town Attorney, which places the Town in an assured position to do or to contract to be done the necessary work to cover, restore and landscape exposed fills and cuts to blend with the surrounding natural terrain.

For new single family residences, major remodel/additions, and major site improvements, the minimum acceptable assurance shall be in a dollar amount equal to the number of total cubic yards of cut and fill needed to restore the property back to natural grade and multiplied by 35, or in such greater amount as deemed appropriate by the Town. The amount of the assurance may be adjusted in accordance with the Building Cost Historical Index in order to account for inflation.

For minor remodel/additions and minor site improvements, the minimum acceptable assurance shall be in a dollar amount equal to the number of total cubic yards of cut and fill multiplied by 35, or in such greater amount as deemed appropriate by the Town. The amount of the assurance may be adjusted in accordance with the Building Cost Historical Index in order to account for inflation.

In the event that construction has not commenced within six months from the date of issuance of the grading or building permit, the plan approval and permit shall expire. Within 6 months after the expiration of the permit, such assurance shall be forfeited to the Town in such amount necessary for the purpose of restoration of the construction site to its original condition and all authorized permits shall be revoked and become void. Also, at any time during construction of the site, the Financial Assurance may be used by the Town to address any health, safety, or welfare situations that arise. The property owner shall, upon reasonable Notice from the Town, provide access to the property for the purpose of restoration of the

ZONING ORDINANCE

construction site to its original condition or to address any health, safety, and welfare issues that arise.

- C. **Safety Measures and Reviews.** The Town may require construction staging and safety plans. The construction staging and safety plans may address items such as construction access, equipment staging, proper turning radius for construction vehicles, and mitigating potential rock fall, etc. When deemed necessary, the Town may hire an outside firm to assist with or provide a safety review of an application. The outside safety review includes, but is not limited to, a review of the grading and drainage, geological report, seismic refraction survey, and excavation methods (if applicable, please reference Chapter 5 of the Town Code regarding Blasting Operation requirements). Any fees associated with the outside safety review are an additional application fee and must be paid by the applicant.

VI. Issuance of Certificate of Occupancy: Prior to the issuance of any Certificate of Occupancy for any building constructed pursuant to these Regulations, the applicant shall obtain from the Town certification of compliance with this Article.

For projects that are ready for Certificate of Occupancy (CofO) or Certificate of Complete (CofC) between the months of May 15th and September 15th, the applicant may request a temporary deferment on the installation of the landscaping (in which the CofO or CofC may be released without the installation of the landscaping). The temporary landscape deferment is subject to the following conditions:

1. The Town will hold the Financial Assurance until the landscaping is installed, and
2. The landscaping shall be installed in accordance with the approved plan and must receive an approved inspection by the Town within five (5) months from the issuance of the CofO or CofC.

ZONING ORDINANCE

Section 2206 DOCUMENTARY REQUIREMENTS AND CERTIFICATION ^{558 580}

- I. **ADMINISTRATIVE HILLSIDE CHAIR REVIEW.** The applicant shall submit plans and documents based upon the scope of the improvement and as determined by the Town Manager or Designee and the Hillside Chair.
- II. **CONCEPT PLAN REVIEW MEETING.** The applicant shall submit the following:
 - A. **Notification Letters.** At least three (3) weeks prior to the scheduled conceptual Hillside Building Committee meeting the applicant shall submit to the Town a neighbor notification letter complete with address labels, with appropriate postage, for all property owners within 500 feet of the perimeter of the subject property. This notification letter shall include the following information; a) type of proposed development (addition, remodel, new construction), b) the scheduled hearing date and time, c) that the letter is only as a courtesy notification and that their attendance at the meeting is not required. d) the purpose of the meeting, and e) the goals of the meeting.
 - B. Seven (7) copies of a preliminary site plan that includes, but is not limited to, the building Footprint, driveway, swimming pool, and accessory use locations along with topographic information for the Lot.
 - C. A 3-dimensional representation of the general massing of all proposed structures (e.g. a mass model, a 3-D scaled rendering or a scaled computer generated model in relation to topography – not a detail model).
 - D. A recent aerial photo of the site (less than 1 year old), with topography, lot lines, and the building Footprint superimposed on it, identification of Significant Natural Features, as well as adjacent lots and structures within 100 feet of the perimeter of the subject property (minimum 24"X 36"), and the location of the driveway access in relation to the nearest roadway.
 - E. Preliminary calculations on land disturbance and cut and fill methods.
- II. **FORMAL AND COMBINED HILLSIDE COMMITTEE REVIEW MEETING.** All plans submitted to the Town for review shall be stamped and sealed by the appropriate registered or licensed professional (e.g. civil engineer, land surveyor, geologist, architect). All plans shall be reviewed by the Hillside Building Committee. In addition, once the plans have been approved by the Committee the applicant shall submit final plans, in accordance with the Hillside Building Committee's approved plans, to the Community Development Department for review. Plan review fees for each such submittal shall be paid at the time of the submittal of such plans in the amount specified in the Town of Paradise Valley fee schedule, as such may be amended from time to time. The following plans and material shall be required:
 - A. **Notification Letters.** At least three (3) weeks prior to the scheduled Formal Hillside Building Committee Meeting the applicant shall submit to the Town a neighbor notification letter complete with address labels, with appropriate

ZONING ORDINANCE

postage, for all property owners within 1,500 feet of the perimeter of the subject property. This notification letter shall include the following information; a) type of proposed development (addition, remodel, new construction), b) the scheduled hearing date and time, c) that the letter is only as a courtesy notification and that their attendance at the meeting is not required, d) the purpose of the meeting, and e) the goals of the meeting.

- B. Seismic Refraction Survey. Unless waived by the Town Manager or designee, all proposed cuts shall require a seismic refraction survey, performed by a registered geologist. If the geological report or seismic refraction survey indicates fractured or unstable rock, then the proposed location of the building site (or appurtenances) shall be changed to a stable location unless the unstable condition(s) can be mitigated by an engineered design that creates a stable location and complies with the provisions of Article XXII and other Articles of this Zoning Ordinance. The geological report and results of the seismic refraction survey shall be submitted to the Town.
- C. A detailed site plan (minimum 24" X 36"), sealed by a registered engineer or land surveyor, with topographic information for the entire lot including under the Footprint of the building. This site plan shall depict: the limits of disturbance; the building envelope including the building Footprint, driveway(s), swimming pools, mechanical equipment, sanitary sewer or septic systems; location, size and type of mechanical screen walls and pool barrier fencing; length and height of retaining walls; all accessory buildings; and Significant Natural Features.
- D. Photographs of the site looking out from the property in all directions and of the property from several different views.
- H. A detailed grading and drainage plan (minimum 24" X 36"), sealed by a registered civil engineer, with topographic information for the entire lot. This plan shall show proposed finished contours at 1 foot intervals within a perimeter 20 feet from the building, a maximum 5 foot intervals elsewhere, and shall show existing and proposed contours. This plan shall show limits of excavation and fill; slope of cut and fill; total cubic yards of excavation and fill; method of concealment for each fill or exposed cut; and the calculations for amount of disturbance for the total development. This plan shall show original drainage pattern (natural course) and proposed changes. If any structures or culverts are involved, it will be necessary to include an estimate of peak flows for a 100 year frequency storm to establish drainage facility cross-sections. Sheet flow diverted from its original drainage pattern shall be returned to its natural course before leaving the property. On-site retention may also be required. Please reference the Town of Paradise Valley Storm Drain Design Manual for on-site retention requirements.
- F.
- G. A detailed landscape plan that includes, but is not limited to the following: the building envelope; building Footprint; all accessory structures and locations; all Significant Natural Features; plant materials list with type, quantity and size; plant location; location and species of salvaged plant materials; and methods for re-vegetation of all disturbed areas. Native desert vegetation shall be identified and

Comment [PL2]: Limit waiver to minor improvements. Check with Engineering Department on criteria on what constitutes a minor cut that could be waived. Perhaps in correlation with Section 2205 I and II. 8/8/17 Managers Meeting.

Default to all cuts pending input from Engineering Department. Send language to Scott and Julie for review.

Comment [GB3]: Engineering Department to provide language regarding safety analysis.

ZONING ORDINANCE

preserved to the maximum extent reasonably possible. A landscape salvage plan shall be provided.

- H. Cross sections of new buildings and appurtenances at a scale equal to or greater than the site plan scale at three or more locations perpendicular to the contours through the building site shall be clearly shown on the topographic map and sealed by a registered professional, or as determined by the Town Manager or designee.
- I. A detailed outdoor lighting plan indicating the proposed luminaire locations on the building and on the site (if applicable); the type of illuminating devices including; the manufacture's catalog cut sheets and drawings; and photometrics that describe the illuminating devices; the fixtures, lamps, lumens and, supports, the beam angles, and other devices.
- J. 3 Dimensional Scaled Computer Model or A Scaled Study Model: The applicant shall submit a scaled 3D computer model or a scaled study model for Hillside Building Committee review.
 - a. **3D Computer Model: A computer generated 3-dimensional model, with accurate points of reference superimposed on it; showing the appearance of the building, lot, landscaping, and skyline. The model must accurately represent the massing of all structures and roof forms as well as the following:**
 - i. All windows, exterior doors and skylights.
 - ii. A sufficient area of the property to visually relate the proposed structure and accessory uses to the natural terrain.
 - iii. The location of the driveway access in relation to the nearest roadway.
 - b. **3D Study Model: Including all proposed improvements, at not less than (1/16) inch = (1) foot showing the relationship of all proposed improvements to the contours of the lot. The model must accurately represent the massing of all structures and roof forms as well as the following:**
 - All windows, exterior doors, and skylights (showing the location of all proposed skylights and their orientation to neighboring properties), and .the location of the driveway access in relation to the nearest roadway.
 - 1. The model shall include enough of the property to visually relate the proposed structure and accessory uses to the natural terrain.
 - 2. The Applicant's name, architect's name, builder's name, lot number, scale, and north arrow.

ZONING ORDINANCE

- K. An accurate oblique view architectural rendering in color or a computer generated 3-dimensional picture shall be submitted showing the appearance of the building, lot, landscaping, and skyline. The rendering or computer generated picture, and the model may remain in the custody of the Town until a Certificate of Occupancy is issued or until released by the Town.
- L. Exterior Material Samples: Include samples of all colors, materials, and material specifications mounted on rigid board with all materials identified with the manufacture's name, color, and LRV number where applicable. Material samples or color specifications are required for all exterior materials and finishes including but not limited to:
- Roof
 - Metal
 - Hardscape
 - Stone
 - View fencing
 - Patio, deck area including second story structures, pool, and breezeways
 - Wall color and texture (8½" x 11" sample size)
 - Masonry
 - Glass
 - Driveway and terrace paving
 - Garage doors
- M. The Applicant's Engineer or Surveyor shall install a marker to designate the location of the house at the major building corners. The markers should be at least 3 feet in height with a colored ribbon at the top of the marker. The applicant shall install markers at least two (2) weeks prior to the Formal Hillside Committee meeting and remove immediately following the formal committee meeting.


ZONING ORDINANCE

Section 2207 DEVELOPMENT STANDARDS ^{558 654}

I. MOUNTAIN PROFILE INVIOLEATE

- A. At and above an elevation of 1500 feet mean sea level, no Development shall occur which will Alter the Mountain Top Ridge Lines as shown on **FIGURE 3** . A model must be submitted pursuant to Section 2206(II)(J) showing compliance with this paragraph together with complete plans showing the appearance of the mountain top profile, as part of the submittal for the Formal Hillside Committee Review. Further, no structure may extend above a plane that originates on the primary ridge line and angles downward from the primary ridge line by twenty degrees (See **FIGURE 4**).

FIGURE 4 – RIDGE LINE TWENTY DEGREE DELINEATION

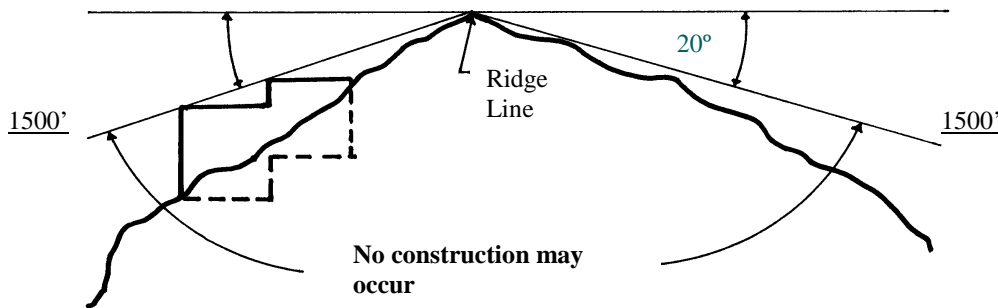

II. ARCHITECTURAL STANDARDS.

- A. For development within the Hillside Development Areas, the height of structures shall be determined by the following four (4) sub-sections and not by the zoning district regulations that apply to lots or parcels outside the Hillside Development Area.
 - 1. Primary Building
 - i. The height of a primary building or primary structure is limited to a twenty-four (24) foot imaginary plane that parallels the existing pre-development Natural Grade. (see **FIGURE 5**).
 - ii. In the case where the Natural Grade has been cut and is not restored back against the building, no exposed face in any vertical plane shall exceed a twenty-four (24') foot height measured from the Lowest, Finished Grade. The maximum height of any deck support column shall not exceed twelve (12') feet tall measured from the adjoining grade.

ZONING ORDINANCE

2. Accessory Structures


- i. The height of an accessory building or accessory structure is limited to a sixteen foot (16') imaginary plane that parallels the existing pre-development Natural Grade.
- ii. In the case where the Natural Grade has been cut and is not restored back against the building, no exposed face in any vertical plane shall exceed a sixteen (16') foot height measured from the lowest, Finished Grade. The maximum height of any deck support column shall not exceed twelve (12') feet tall measured from the adjoining grade.

ADD FIGURE ILLUSTRATING 16' HEIGHT LIMIT.

- 3. The maximum overall height of the building or structure, including chimneys and accessory buildings, shall not exceed forty (40) feet from the highest point of of a building or structure to the lowest point of Natural Grade at the lowest building or structure (excluding driveway retaining walls) -see **FIGURE 5**.

Comment [GB4]: Figure 5 to be updated to reflect these edits.

FIGURE 5 – BUILDING HEIGHT IN HILLSIDE

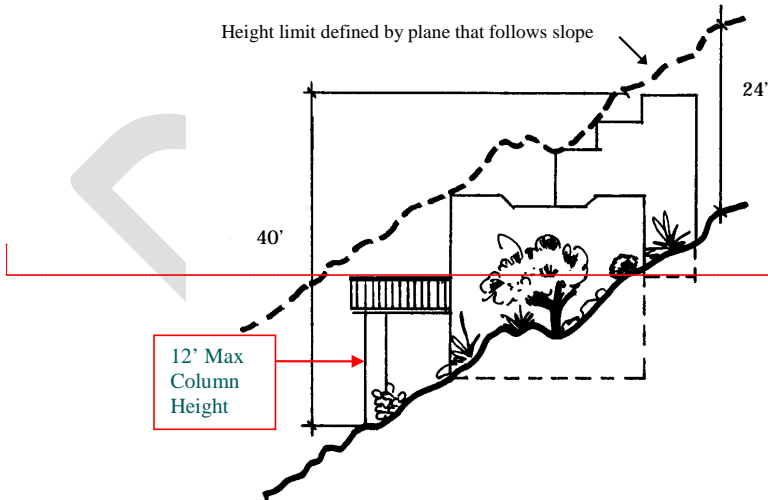


Comment [GB5]: Update Figure 5 to clarify measurement of 40' maximum height limit.

- 4. Where a building spans a wash the maximum height of twenty-four (24') feet shall be measured vertically from that point where the visible structure and the side of the wash intersect. See-**FIGURE 6**.

FIGURE 6 – BUILDING HEIGHT WITH A WASH CROSS SECTION

ZONING ORDINANCE

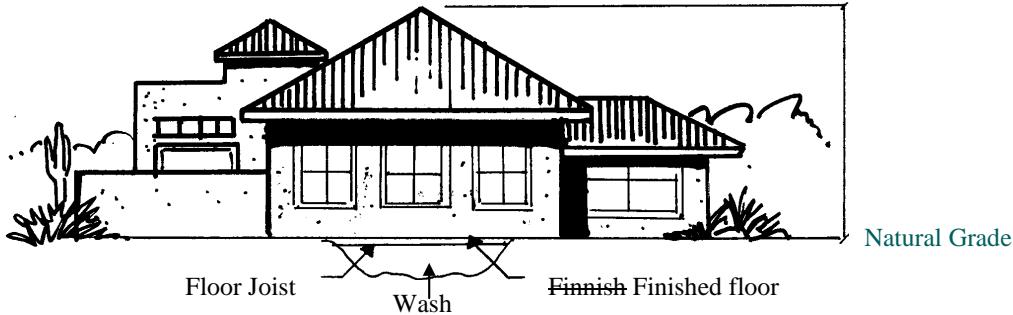

- B. Cantilevers. The primary residence, accessory buildings, and other structures (such as pool decks) may employ the use of cantilevers, subject to the following limitations:
1. Primary residence and accessory buildings. Cantilevered elements of the building must comply with the applicable setbacks and heights of the building. All of the area underneath the cantilevered element shall be calculated as disturbed area and floor area.
 2. Driveways. Cantilevered driveways shall not be allowed.
 3. All other structures (such as pool decks) employing the use of a cantilever may extend the cantilever a maximum horizontal length of 4 feet and a maximum vertical height of 8 feet. All of the area underneath the cantilevered element shall be calculated as disturbed area. The cantilevered elements of the structure must comply with the applicable setbacks.
 4. The area under a cantilever must be finished with colors or materials that match the adjoining structures or blend in with the surrounding natural setting. The materials or colors used shall not have a LRV (Light Reflective Value) greater than thirty-eight (38) percent.
 . (See **FIGURE 7** below).

Comment [GB6]: New figures to be added to the code to illustrate these scenarios.

FIGURE 7 - HEIGHT FOR A CANTILEVERED ELEMENT

L = 4' Max

ZONING ORDINANCE



5. All of the setback requirements of the underlying zoning district shall apply in the Hillside Development Area (see Article X).
6. Raised Outdoor Living Areas are subject to the setback requirement of pools and spas and are limited to a maximum height of eight (8') feet tall.
7. Materials used for exterior surfaces such as structures, walls, roofs and fences shall blend with the surrounding natural setting and avoid high contrasts. There shall be no paint or material colors used which have a LRV (Light Reflecting Value) greater than thirty-eight (38) percent. Materials and color used for exterior surfaces are subject to Hillside Building Committee review and approval. The applicant must demonstrate how the materials and colors used for the exterior surfaces blend in with the natural surroundings and settings. Limited use of contrasting accent colors (in excess of 38% LRV) for small elements, including, but not limited to items such as doors and window mullions, may be allowed upon explicit approval of the Hillside Building Committee.
8. All electrical service equipment and subpanels and all mechanical equipment including, but not limited to, air conditioning, evaporative cooling, and antennas greater than 24" in diameter shall not be allowed on the roof.

Solar panels may be allowed if they are integrated into the building design and hidden from view when viewed from the same or a lower elevation and approved by the Hillside Building Committee by a Combined Review. Solar panels may be allowed on pitched roofs when screened from the same or a lower elevation by the adjoining hillside or hillside cut. Stealth solar technology may also be used on pitched roofs and may not be required to be hidden from view. Stealth solar technology shall be limited to solar shingles and solar tiles that are integrated to blend in with the building design, have a light reflective value of 38% or less, and must be approved by the Hillside Building Committee.

All mechanical, electrical, and natural gas equipment along with pool equipment and antennas shall be screened in such a manner that they are not visible from outside the property when viewed from the same or a lower elevation. Vegetation does not constitute a screen.

- F. Mirrored surfaces or reflective treatments that change or enhance ordinary glass into a mirror surface are prohibited. Permanently reflective metallic surfaces shall be prohibited.

Comment [GB7]: Remove support from illustration and change horizontal to 4' max on Figure 7.

Comment [GB8]: Staff to research other solar technology such as solar shingles and potential use on hillside homes.

ZONING ORDINANCE

- G. The building design should minimize the reflection of daytime glare from glass and the emission of light from within the structure during evening hours.
- H. The quantity and orientation of skylights shall be designed to minimize night time emission of light and may be allowed upon approval of the Hillside Building Committee.
- I. Shake shingle roofs are prohibited. Existing shake shingle roofs on residential structures may be allowed only until such time that it is determined, during the course of normal maintenance, that a new roof (re-roof) is necessary and/or the extent of maintenance or repair work requires a building permit from the Town.

III. LAND DISTURBANCE STANDARDS.

- A. The limits of construction, demolition, or proposed disturbed areas shall be clearly staked in the field, with a minimum barrier of visible roping, prior to and during construction and shall conform to the approved plans. Both during and after construction, no disturbance shall be permitted beyond the areas designated as the limits of disturbance on the plans. If land disturbance in violation of this ordinance occurs, the illegally-disturbed area(s) shall be restored to its Natural Grade and re-vegetated with plant material of the same species, size, and at a similar density present prior to the illegal disturbance.
- B. All disturbed land that is not otherwise used for approved development shall be restored to the Natural Grade and re-vegetated with plant material native to the hillside and pursuant to a landscape plan that is appropriate for the site and approved by the Town.
- C. All buildings, structures, roads, and drives shall, to the fullest extent practicable, follow and utilize the natural contours of the land to minimize disturbance. The maximum height of any cut used to establish a building site shall not exceed 30 feet.
- D. All surplus excavated material shall be removed from the lot prior to the issuance of the Certificate of Occupancy.
- E. After final grading, not more than 5% of the lot shall be steeper than the Natural Grade of the lot.
- F. The total disturbed area shall not exceed the allowed percentage of the lot area as shown in **TABLE 1** below.
- G. Grading within street rights-of-way or tracts of land for private roads is exempt from the disturbance calculations. Any roadway grading beyond the limits of the dedicated rights-of-way or private road tracts shall be placed in slope easements and included within the calculations for land disturbance limitations.

ZONING ORDINANCE

- I. A legally pre-existing disturbed area may be excluded from disturbed area calculations when the applicant complies with all of the following restoration conditions:
 - 1. The restored area shall follow original natural contours.
 - 2. The restoration shall be treated with an aging agent approved by the Town Manager or Designee and planted with native desert material that is consistent in density with the area surrounding the undisturbed areas abutting the pre-existing disturbed area.
 - 3. The restoration process shall be sealed by a landscape architect and/or a registered professional.
- J. On-site retention may be required. Please reference the Town of Paradise Valley Storm Drain Design Manual for on-site retention requirements.
- K. On-site retention shall be counted as Disturbed Area. Retention areas not employing the use of retaining walls and vegetated with native plant material shall count as fifty (50%) percent disturbed area.
- L. The livable portion of the main residence including garage and livable portions of detached accessory buildings shall not be counted as disturbed area provided that all buildings are within the required setbacks and do not exceed the building height limitations as specified in Section 2207 (II) (A) of this Ordinance.

TABLE 1 - Slope Category / Lot Disturbance Limitations

Bldg. Site Slope	% Allowable Land Disturbance	Bldg. Site Slope	% Allowable Land Disturbance	Bldg. Site Slope	% Allowable Land Disturbance
10%	60.0	41%	9.90	72%	6.80
11%	53.66	42%	9.80	73%	6.70
12%	47.94	43%	9.70	74%	6.60
13%	42.81	44%	9.60	75%	6.50
14%	38.21	45%	9.50	76%	6.40
15%	34.11	46%	9.40	77%	6.30
16%	30.48	47%	9.30	78%	6.20
17%	27.27	48%	9.20	79%	6.10
18%	24.46	49%	9.10	80%	6.00
19%	22.01	50%	9.00	81%	5.90
20%	19.88	51%	8.90	82%	5.80
21%	18.04	52%	8.80	83%	5.70
22%	16.48	53%	8.70	84%	5.60
23%	15.16	54%	8.60	85%	5.50
24%	14.05	55%	8.50	86%	5.40
25%	13.13	56%	8.40	87%	5.30
26%	12.37	57%	8.30	88%	5.20

ZONING ORDINANCE

Bldg. Site Slope	% Allowable Land Disturbance	Bldg. Site Slope	% Allowable Land Disturbance	Bldg. Site Slope	% Allowable Land Disturbance
27%	11.76	58%	8.20	89%	5.10
28%	11.28	59%	8.10	90%	5.00
29%	10.90	60%	8.00	91%	4.90
30%	10.62	61%	7.90	92%	4.80
31%	10.41	62%	7.80	93%	4.70
32%	10.25	63%	7.70	94%	4.60
33%	10.15	64%	7.60	95%	4.50
34%	10.08	65%	7.50	96%	4.40
35%	10.04	66%	7.40	97%	4.30
36%	10.02	67%	7.30	98%	4.20
37%	10.01	68%	7.20	99%	4.10
38%	10.00	69%	7.10	100%	4.00
39%	10.00	70%	7.00		
40%	10.00	71%	6.90		

IV. DRIVEWAYS⁵⁵⁸

- A. Driveways that only serve a new single residence shall be: (1) a minimum of 12 feet wide; (2) surfaced with paving brick, textured integral colored concrete (i.e. stamped or exposed aggregate etc.) or other similar decorative paving materials specifically colored to blend with the existing natural color of the site (asphalt driveways are prohibited); (3) designed with an overall grade that does not exceed 30%; (4) constructed in full conformance with the Fire Code; and (5) developed only as specifically approved by the Hillside Building Committee. The driveway shall be included in the calculations for land disturbance limitations at a ratio of 50% of the total disturbed area of the driveway, if the driveway is constructed at a grade plus or minus (6) inches from Natural Grade. Driveways with cut and fill in excess of (6) inches and under (18) inches from Natural Grade shall be charged with 75% of the total disturbed area of driveway surface. The Driveways with cut and fill in excess of (18) inches from natural grade shall be charged with 100% of the total disturbed area of the driveway. The entire driveway must be within the natural grade limit to be subject to the disturbance ratios noted above.
- B. Driveways that serve an existing home undergoing renovation, remodel, or an addition shall be included in the calculations for land disturbance limitations subject to the following conditions:
1. Existing driveways reconstructed or resurfaced with paving bricks, textured integral colored concrete (e.g. stamped or exposed aggregate etc.) or other similar decorative paving materials, specifically colored to blend with the existing natural color of the site, shall be excluded from the land disturbance calculations.

ZONING ORDINANCE

2. Existing asphalt or uncolored concrete driveways not reconstructed with paving bricks or textured integral colored concrete (e.g. stamped or exposed aggregate etc.) shall be calculated as disturbed area at a ratio of 150% of the total disturbed area of the driveway.
 3. Any new portions of the driveway beyond the layout of the existing driveway shall be included in the calculations for land disturbance limitations at a ratio of 50% of the total disturbed area of the driveway, if the driveway is constructed at a grade plus or minus (6) inches from natural grade. Driveways with cut and fill in excess of (6) inches and under (18) inches from natural grade shall be charged with 75% of the total disturbed area of driveway. The Driveways with cut and fill in excess of (18) inches from natural grade shall be charged with 100% of the total disturbed area of the driveway. The entire driveway must be within the natural grade limit to be subject to the disturbance ratios noted above.
- C. The minimum standard turning radius for a driveway is 40 feet; except that a minimum 35 foot radius may be used provided all structures are protected with an approved fire extinguishing system.
- D. Any street or driveway cut greater than 8 feet shall not have a length greater than 100 feet. The applicant must mitigate means of breaking-up the mass of the cut and blending the cut in with the surrounding natural terrain.
- E. A twenty (20) foot by thirty (30) foot driveway apron may be required by the Fire Marshall or the Building Official at or near the garage or another location deemed necessary by the Fire Marshal, with no more than a 5% grade, to serve as a staging platform to fight a fire.
- F. The maximum height, measured vertically, of any cut used to establish a street or driveway shall not exceed 30 feet.

V. GRADING AND DRAINAGE STANDARDS.

- A. There shall be no clearing, grubbing, grading, importing or stockpiling of fill material on, or to, any site prior to approval of such Development by the Hillside Building Committee and approval of a grading plan by the Town, unless such clearing, grubbing, or grading, is required by the Town for public safety purposes. If applicable, approval of a grading plan and drainage report prepared by a registered Engineer may be required for Town review and approval.
- B. Storm water retention shall be provided to the greatest extent possible in accordance with the Town Code and the Town Storm Drainage Design Manual.

ZONING ORDINANCE

- C. The maximum depth of fill shall not exceed 7.5 feet except beneath the Footprint of the main residence. All exposed disturbed area fill shall be contained behind retaining walls or covered with a natural rock veneer and treated with an aging agent and landscaped with indigenous plant material.
- D. Veneered Rock Slopes may be allowed provided that they are approved by the Hillside Building Committee, and:
 - 1. The vertical height of the Veneered Rock Slope does not exceed the vertical height of the exposed cut with the base of the Veneered Rock Slope structurally engineered for stability.
 - 2. The Veneered Rock Slope does not exceed a one to one slope.
 - 3. Retaining walls used to limit the height of the Veneered Rock Slope are color treated or veneered to blend in with the surrounding natural colors.
- E. Raw Spill Slopes are prohibited. Any violation will be subject to a stop work order until the spill slope is removed, restored to its natural grade, re-vegetated and approved by the Town.
- F. A Hillside Wash shall not be diverted, relocated or moved from its present position to another location, however, a Hillside Wash may be bridged by a structure so long as such structure does not impede the flow of the hillside wash.
- G. Washes located on a property shall be maintained in accordance with Chapter 5 and Chapter 8 of the Town Code.

VI. WALLS AND FENCES.⁵⁵⁸

- A. Curbs less than 8 inches above finished grade are not considered walls.
- B. No more than 300 total linear feet of wall shall be visible from any point on the property line. All pool barriers shall be view fencing. View fencing is not calculated in the 300 foot maximum allowable wall length.
- C. Walls that are otherwise permissible in Article XXIV are prohibited in the Hillside Development Area. Retaining walls, pool barriers, walls used to screen mechanical equipment, driveway columns and entry gates, and tennis/sport court fencing are allowed provided that they are of minimum lengths and heights, as further specified below, and are approved by the Hillside Building Committee.
 - 1. Retaining Walls:
 - a. The intent of the retaining wall requirements is to mitigate the massing and impact of walls on the hillside and preserve the characteristics of the desert. The objective is to allow only the minimum amount of retaining walls needed to access the property,


ZONING ORDINANCE

retain cut and fill, and screen mechanical equipment and windows of interior bathroom areas.

- b. Where retaining walls are provided, they shall meet the setback requirements of Article 24, Height and Setback Regulations, unless needed to access the property (such as driveway retaining walls) or deemed necessary by the Town Engineer and the Community Development Director to prevent erosion or flooding.
- c. The maximum length of any continuous retaining wall shall not be more than 100 linear feet. The maximum height of any retaining wall shall not be more than 8 feet. The height of a retaining wall is measured from the low side of natural grade when retaining fill slopes and from finished grade when retaining cut slopes to the top of the wall; whether the top is retaining earth or not.
- d. Retaining walls shall be used for the purpose of containing fill material or for minimizing cut or fill slopes. The retaining wall may only extend six (6) inches above the material it is retaining.
- e. A terraced combination of retaining walls shall be measured as a single retaining wall provided the combined walls are: 1) no more than eight (8) feet total vertical height; 2) terraced with a minimum distance between of four (4) feet and a maximum separation of eight (8) feet; and 3) contain appropriate vegetation between the walls so as to soften the visual impact of the combined walls (see **FIGURE 8**). These separation requirements apply to any single lot and do not apply to adjoining walls on neighboring properties.
- f. When a safety fence, on top of a retaining wall, is required by code it shall be a view fence, with a minimum height per building code and a maximum height of 42" (as determined by the Hillside Building Committee), and shall be painted to blend with surrounding natural colors.
- g. Where retaining walls are provided they shall be color treated, textured, or veneered to blend in with the surrounding natural colors and textures of the native rock and soils at the site.

FIGURE 8 –TERRACED VERTICAL RETAINING WALLS

ZONING ORDINANCE

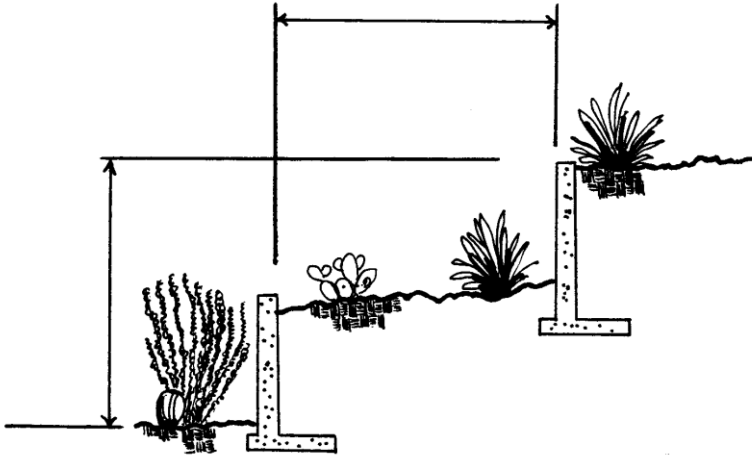

2. **Pool Barriers.** All pool barriers shall be View Fencing. The pool barrier shall be the minimum amount that is needed to secure the pool and that is appropriate for the site.
3. **Screen Walls:** These walls may be solid walls provided they are of minimum height and length needed to screen the mechanical equipment, garbage cans, or windows of interior bathroom areas, and shall not exceed six (6) feet in height. Screen walls over 6 feet in height may be allowed, at the discretion of the Hillside Building Committee, to properly screen the mechanical equipment or windows of interior bathroom areas; provided, 1) such walls meet the allowable setbacks and height of an accessory structure, and 2) screening area surrounded by screen walls is calculated as part of the allowable floor area.
4. **Tennis/Sport Courts:** Fences surrounding a tennis court or sport court shall be; (i) no greater than 10 feet in height as measured from the playing surface, (ii) counts as disturbed area, and (iii) View Fencing and colored to blend in with the surrounding area. The area of the Tennis/Sport Court shall be counted as disturbed area.
5. Driveway columns and entry gates may be located ten (10) feet or more from the property line. The columns and gate are limited to six (6) feet in height and the columns may be a maximum size of two (2) feet by two (2) feet. Electrically controlled gates must be equipped with an approved key switch located as far as possible from the right-of-way.
6. **Driveway Retaining Walls.** Driveway retaining walls may extend 18 inches above the driving surface provided the retaining wall meets the 8 foot height limit. When a safety fence on top of a driveway retaining wall is required by code, it shall be a view fence with a minimum height per


ZONING ORDINANCE

building code and a maximum height of 42” (as determined by the Hillside Building Committee) and shall be painted to blend with surrounding natural colors. The retaining wall must comply with the 8 foot height limit; however, the view guard is not limited to the 8 foot retaining wall height limit.

DRAFT

ZONING ORDINANCE

Comment [GB9]: Relocate Figure 8 below the text of 2207.VI.1.e.

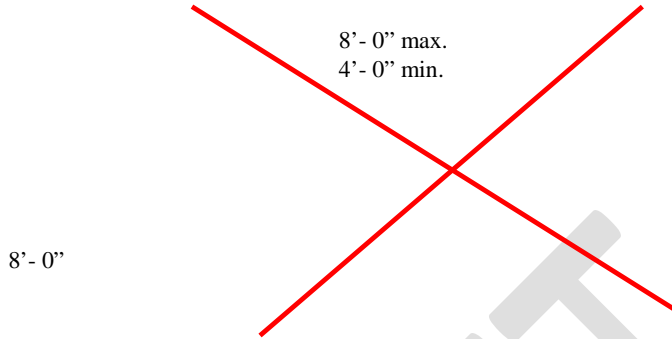

VII. ACCESSORY STRUCTURES AND ADDITIONS TO EXISTING STRUCTURES. ⁵⁵⁸

- A. Any proposed accessory structure or improvements to existing hillside structures which require additional disturbed area shall be accompanied by calculations of prior disturbed area to determine if the entire site is within the allowed limits for hillside construction. When the disturbed area equals that allowed, no further construction involving additional disturbed area will be permitted.
- B. Accessory buildings and structures shall not occupy more than one-half of the total ground area of the main building. No accessory building or structure shall exceed the height specified in Table 1001B or elsewhere in this ordinance.

VIII. SEWERS AND UTILITIES.

- A. Grading for septic systems, evapotranspiration systems, and alternative systems shall be included in the calculations for land disturbance limitations unless:
 - 1. The disturbed area is brought back to original natural grade contours, treated with an approved aging agent and planted to blend with surrounding natural growth,
 - 2. Special landscape plans for evapotranspiration systems shall be submitted to the Town Engineer. Plans shall show the appropriate vegetation and supplemental irrigation systems approved by the Town Engineer.

ZONING ORDINANCE

- B. Grading for utility lines, including water and sewer lines and lateral lines, electric, gas, telephone and cable services, shall be included within the calculations for land disturbance limitations unless:
 - 1. Trenches are placed under a driveway, under paving or in other areas already counted as disturbed, or
 - 2. Trenches and related disturbed areas are restored to appear as original ground, color treated and planted to blend with surrounding natural growth.

IX. FIRE PROTECTION.


- A. Washes must be maintained as easements as described in Section 8-7 of the Town Code and other applicable codes to minimize the risk and spread of fire.
- B. Grasses known to be highly flammable, such as fountain grass, *Pennisetum setaceum*, and buffel grass, *Pennisetum ciliare* are not allowed in a Hillside Development Area.

Section 2208 OUTDOOR LIGHTING⁵⁵⁸

- A. Purpose: The intent of these lighting requirements is to preserve the low light level conditions that are inherently characteristic of the desert. The objective is to allow only the quantity and level of lighting necessary for safety, security and the enjoyment of outdoor living while protecting against direct glare and excessive lighting; protecting the ability to view the night sky; and preventing light trespass.
- B. Definitions: For the purposes of this section, exterior lighting is defined and regulated by the following definitions and categories:
 - 1. Beam Angle – Beam angle is the angle of the cone of light where the intensity is 50% of the maximum intensity at center beam. (See Figure 9)


ZONING ORDINANCE

FIGURE 9 – Light Source Beam Angle

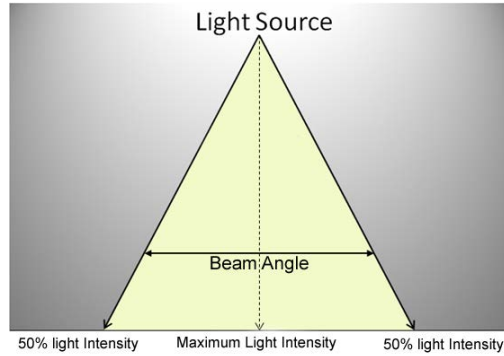

2. Foot-Candle - A unit of measure of the intensity of light of a candle illuminating a one foot square surface, one foot from the candle.
3. Lighting Types
 - a) Chandelier - A decorative lighting fixture that **may** hold a number of bulbs and is suspended from a ceiling.
 - b) Fully Shielded Down Light (Full Cut-Off) - A fixture shielded with an Opaque material so that light rays emitted by the fixture are projected only below a horizontal plane running through the lowest point on the fixture where light is emitted.
 - c) Fully Shielded Up Light - A fixture shielded with an Opaque material. The maximum beam angle shall not exceed forty five (45) degrees. (See Figure 10)

FIGURE 10

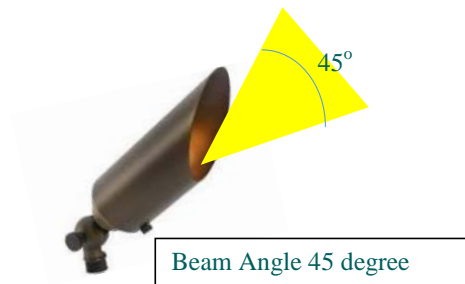

ZONING ORDINANCE

- d) Fully Shielded (No Cut-Off) - A fixture that allows light rays to be emitted up and down and shielded with an Opaque material in such a manner to prevent the light source from being seen.
- e) Linear lighting includes the following
- LED tape
 - Fluorescent tubes
 - Neon tubes
 - Rope Light - a lighting fixture featuring small light bulbs linked together and encased in a PVC jacket to create a string of lights
 - String and Bulb lights – a series of lights along a coated wire. Also known as Edison Lights, Cafe Lights, Patio Lights or Party Lights. Fairy Lights or Micro String Lights are tiny LED lights (about the size of a grain of rice) along a very thin bendable wire. Globe String Lights have larger bulbs in different shapes.
- f) Opaque fixture – Impervious to the passage of light.
- g) Recessed Can - A light fixture that is installed into a hollow opening in a ceiling. The fixture is a recessed downlight (also known as pot light).
- h) Rope Light - a lighting fixture featuring small light bulbs linked together and encased in a PVC jacket to create a string of lights.
- i) Safety Lighting - Low-level lighting used to illuminate vehicular and pedestrian circulation
- j) Security Lighting - A Fully Shielded Down Light that is intended to provide bright illumination during emergency situations only. Lighting shall be on a motion sensor
- k) String and Bulb lights – a series of lights along a coated wire. Also known as Edison Lights, Cafe Lights, Patio Lights or Party Lights. Fairy Lights or Micro String Lights are tiny LED lights (about the size of a grain of rice) along a very thin bendable wire, and Globe String Lights which have larger bulbs in different shapes.
- l) Translucent fixture - A fixture with material through which light can pass but the light source is obscured.

ZONING ORDINANCE

- m) Unshielded fixture –a Luminaire with the light source clearly visible
4. Lumens – The Standard International (SI) unit of luminous flux.
 5. Luminaire (Light Fixture) - A complete lighting unit consisting of a lamp or lamps and ballast(s) (when applicable) together with the parts designed to distribute the light, position and protect the lamps, and connect the lamps to the power supply.
 6. Lux - A unit of measure of the intensity from light of a candle illuminating a one meter square surface, one meter from the candle. One foot-candle equals approximately 10.8 Lux.
 7. Outdoor Living Area - includes a furnished patio, dining area, kitchen or cooking area, a fire pit or lounging area. Does not include active, outdoor recreation areas such as sport courts or tennis courts. Outdoor living areas may be underneath a ceiling or roof, or be under a trellis, or have no cover
 8. Trespass Lighting - Spill light that encroaches onto neighboring properties.
 9. Visual Enjoyment Lighting - Lighting intended to illuminate outdoor living areas. .
- C. Design Standards:
- The maximum lighting intensity shall not exceed 0.25 Footcandle when measured at the property line except for Walkway and Driveway entrance lighting.
- Luminaires shall be set back from the nearest property line a minimum of ten (20) feet except for Walkway and Driveway entrance lighting.
- All Luminaires, unless otherwise allowed, shall be directed downward and aimed on the targeted areas to maximize their effectiveness and minimize the total number of lighting fixtures.
- Building mounted Luminaires must be directed downward away from adjacent lots, streets, undisturbed areas, and open spaces, and may not be used to illuminate walls or building elements for decorative purposes.
- Wall mounted entry Luminaires shall be shielded in such a manner as to avoid creating concentrated light (hot spots) on the structures to which they are mounted.
- D. Lighting Zones

ZONING ORDINANCE

1. Main Entry Lighting -at the main entry of the primary structure a maximum of two (2) Luminaires may be permitted. These Luminaires will aid visitors in locating the main entry and will add safety by aiding the homeowner to identify who is at the door. The permitted Luminaires are listed below.
 - a) Fully Shielded Luminaires
2700 Kelvins maximum
1100 Lumens maximum per fixture
 - b) Translucent Luminaires
2700 Kelvins maximum
800 Lumens maximum per fixture
 - c) Unshielded Luminaires (Coach/Carriage Lights)
2700 Kelvins maximum
550 Lumens maximum per fixture
 - d) Recessed Can in ceiling or soffit, Fully Shielded
2700 Kelvins maximum
1100 Lumens maximum per fixture
Beam Angle not greater than 90 degrees
 - e) Chandelier
2700 Kelvins maximum
1100 Lumens maximum per fixture
Fully shielded by architecture of the house
2. Other pedestrian entrances - shall be limited to one (1) Luminaire as listed above.
3. Garage Doors - The first garage door may have two (2) luminaires as listed above. Each additional adjacent garage door per structure may have one (1) of the above listed luminaires.
4. Walkway and Driveway Entrance Lighting

Full Cutoff type Luminaries may be placed on each side of the driveway entrance and one side of an entry walkway. Maximum height of these luminaries not to exceed 36 inches maximum and light output not to exceed 250 lumens. Additional Full Cutoff type luminaries may be used along the walkway to the main pedestrian entry walkway and along the drive to the garage(s). These luminaries must be spaced apart a minimum of 12 feet
5. Landscape Lighting

ZONING ORDINANCE

- a) Ground mounted Luminaires - The number of up-light fixtures is limited to one fixture per 1000 square feet of allowable disturbed area.

The Light Source Beam Angle shall not exceed 45 degrees. And shall not exceed 250 Lumens per fixture. These fixtures shall be Fully Shielded.

- b) Post-mounted Luminaires - shall not exceed 36 inches above the ground, full cutoff, limited to 250 lumens.
- c) Tree-Lighting – Fully shielded down light Luminaires affixed to trees shall be located above the lowest tree branch and deep into the tree canopy to limit light trespass outside the tree canopy. Luminaires shall not exceed 150 Lumens. Maximum number of Luminaires shall not exceed three (3) per tree. Maximum height of Luminaire shall not exceed sixteen (16) feet.

6. Security Lighting

Security Luminaires shall be on only when needed and shall be controlled by a timer that limits operation to 5 minutes per incident. The Luminaire shall not exceed 1200 Lumens and shall be a Fully Shielded Down Light. Fixtures shall be mounted no higher than twelve (12) feet above finished grade and shall be an integral part of and attached to the building. The maximum light at the property line shall not exceed 0.5 foot-candles.

7. Underwater lighting

Luminaires for installation below the surface of the water in swimming pools, permanently installed spas, hot tubs, and similar water-containing vessels are often necessary for safety. These luminaires are not subject to the lighting standards above and may be decorative and colored. The luminaires shall not generate light in excess of 0.25 Foot-candle measured at the property line

8. Holiday Lighting

Temporary holiday lighting is permitted between October 15th and January 15th. All temporary holiday lighting shall not exceed 0.25 Foot-candle measured at the property line

9. Rope Lighting/LED tape

Rope lighting or LED tape shall not exceed 80 Lumens per lineal foot and 36 inches from grade. Luminaires must be shielded.

10. Outdoor Living areas

The intent of these lighting requirements is to allow only the quantity and level of lighting for the enjoyment of outdoor living areas. Outdoor living area lighting shall only be used when the area is occupied.

If the Outdoor Living area has no ceiling, no roof, or no trellis, pole lights may be used. Maximum Luminaire height is 8.5 feet and only Fully Shielded full cutoff down light Luminaries may be used with the poles. The

ZONING ORDINANCE

measured lighting shall not exceed 5 foot-candles at any location within the Outdoor Living area.

If the Outdoor Living area is under a trellis, pole lights as described above and Fully Shielded full cutoff down light Luminaires attached to the trellis may be used. The measured lighting shall not exceed 5 foot-candles at any location within the Outdoor Living area

If the Outdoor Living area is under a ceiling or roofs any type of Luminaire may be used providing that they are aimed down and the ceiling or roof shall prevent any light penetrating a horizontal plan at the height of the ceiling or roof. The measured lighting shall not exceed 5 foot-candles at any location within the Outdoor Living area.

- E. **Prohibitions** In addition to the limitations noted above, the following Luminaires are strictly prohibited:
1. Any lighting that exceeds 3500 Kelvins
 2. Decorative colored lamps or bulbs (with the exceptions of amber insect bulbs not to exceed 2700 kelvins, underwater Luminaires, and Holiday Lighting).
 3. Unshielded string and bulb luminaires.
 4. Unshielded rope lights.
 5. Tennis court and sport court lighting.
 6. Temporary lighting that violates the provisions of this lighting section.
 7. Exterior Luminaire, except Security Lighting, that illuminate the adjoining mountainside such that the mountainside is visible from off the property at any time.
 - i. There shall be no lighting permitted in areas identified as “undisturbed areas” of the property pursuant to the plans submitted under Section 2207 III.A.

Amendments:

Should the applicant desire to substitute outdoor light fixtures or lamps after a permit has been issued, and prior to Certificate of Occupancy, the applicant must submit all changes to the Town Manager or designee for approval, with adequate information to assure compliance with this ordinance.

Section 2209. DENSITY and SUBDIVISIONS / LOT SPLIT STANDARDS

ZONING ORDINANCE

- A. The maximum number of lots into which Hillside Development Area land may be subdivided shall be the sum of the number of lots allowed in each slope category of land as shown by the following **TABLE 2 – Density/Slope Category**.
- B. Slope shall be calculated using a minimum of 3 slope lines per acre. The slope lines shall be perpendicular to the slope and at equal distances across the lot.
- C. Each of the resulting lots shall meet the minimum lot size requirements based upon the average lot slope shown on **TABLE 2**.
- D. Building envelopes shall be conceptually indicated on preliminary plats and accurately shown on final plats.
- E. The subdivider shall provide plans and documents by a registered architect, civil engineer, or surveyor demonstrating that roads, public or private, and driveway access and placement of residential structure will conform, for each lot, to current hillside development regulations and without the need for a variance.
- F. All subdivision development and lot split applications shall comply with the Hillside Development Requirements as outlined in the Town of Paradise Valley Subdivision Ordinance and Article XXII of this Ordinance.

ZONING ORDINANCE

TABLE 2 – Density / Slope Category

Average Lot Slope %	Min. Lot Size Acres	Min. Lot Size –Sq. Ft.	Average Lot Slope %	Min. Lot Size Acres	Min. Lot Size – Sq. Ft.
10%	1	43,560	41%	6.8	296,208
11%	1.01	43,996	42%	7.6	331,056
12%	1.02	44,431	43%	8.4	365,904
13%	1.04	45,302	44%	9.2	400,752
14%	1.06	46,174	45%	10	435,600
15%	1.08	47,045	46%	11	479,160
16%	1.1	47,916	47%	12	522,720
17%	1.2	52,272	48%	13	566,280
18%	1.3	56,628	49%	14	609,840
19%	1.4	60,984	50%	15	653,400
20%	1.55	67,518	51%	16	696,960
21%	1.6	69,696	52%	17	740,520
22%	1.7	74,052	53%	18	784,080
23%	1.8	78,408	54%	19	827,640
24%	1.9	82,764	55%	20	871,200
25%	2	87,120	56%	21	914,760
26%	2.2	95,832	57%	22	958,320
27%	2.4	104,544	58%	23	1,001,880
28%	2.6	113,256	59%	24	1,045,440
29%	2.8	121,968	60%	25	1,089,000
30%	3	130,680	61%	26	1,132,560
31%	3.2	139,392	62%	27	1,176,120
32%	3.4	148,104	63%	28	1,219,680
33%	3.6	156,816	64%	29	1,263,240
34%	3.8	165,528	65%	30	1,306,800
35%	4	174,240	66%	32	1,393,920
36%	4.4	191,664	67%	34	1,481,040
37%	4.8	209,088	68%	36	1,568,160
38%	5.2	226,512	69%	38	1,655,280
39%	5.6	243,936	70%	40	1,742,400
40%	6	261,360			

Section 2210. REMOVAL OF PROPERTY FROM HILLSIDE

The Hillside Building Committee and Town Council shall review plans for any request to remove a property from the Hillside Development Area. This process applies to properties that are designated within a Hillside Development Area and have a slope of less than ten percent (10%). If a property owner elects to remove the property from the Hillside Development Area, the following applies:

ZONING ORDINANCE

1. The applicant must provide documentation that the property has a building pad slope and site of less than ten percent (10%) in accordance with Section 2202 and Section 2209B.
2. The request will be reviewed by the Hillside Building Committee, which will make a recommendation of approval, approval with stipulations, or denial to remove the property from the Hillside Development Area.
3. The applicant shall have no other code violations;
4. The Town Council will either approve, deny, or approve the request with stipulations, which may include eliminating any non-conformities.

FOOTNOTE:

110 Ordinance # 220 – 7/12/84
112 Ordinance #221 – 9/24/84
181 Ordinance # 305 – 11/9/89
193 Ordinance # 320 – 2/28/91
194 Ordinance # 321 – 2/28/91
206 Ordinance # 338 – 3/26/92
382 Ordinance # 382 – 12/01/94
409 Ordinance #409 - 7/13/95
425 Ordinance # 425 – 9/12/96
533 Ordinance # 533 – 10/09/03
558 Ordinance # 558 – 06/09/05
580 Ordinance # 580 – 10/26/2006
654 Ordinance #654 – 03/13/2014

Section 5. If any section, subsection, sentence, clause, phrase or portion of this ordinance or any part of these amendments to the Town Code adopted herein by reference is for any reason held to be invalid or unconstitutional by the decision of any court of competent jurisdiction, such decision shall not affect the validity of the remaining portions thereof.

Section 6. This ordinance shall become effective in the manner provided by law.

PASSED AND ADOPTED by the Mayor and Council of the Town of Paradise Valley, Arizona, this ____ day of _____, 2017.

Michael Collins, Mayor

SIGNED AND ATTESTED TO THIS ____ DAY OF _____ 2017

ATTEST:

Duncan Miller, Town Clerk

ZONING ORDINANCE

APPROVED AS TO FORM:

Andrew M. Miller, Town Attorney

DRAFT