



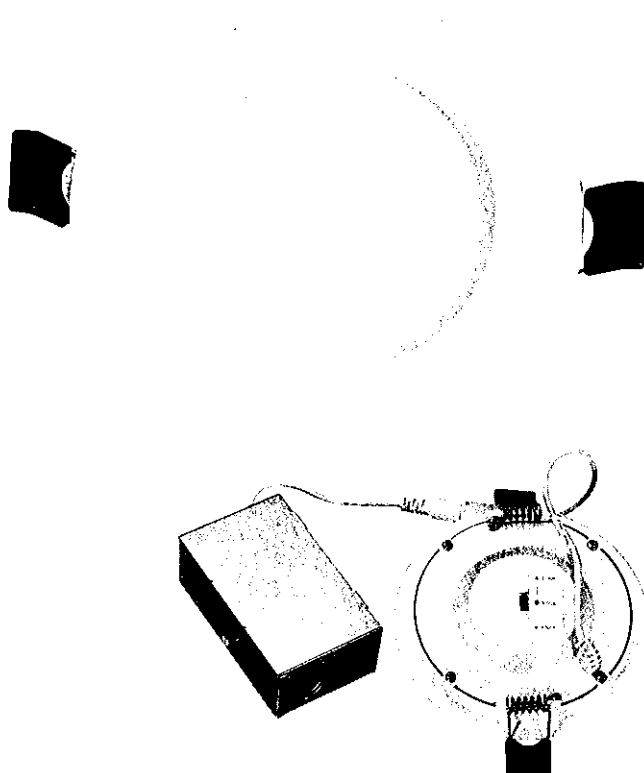

Job Name/Title: _____ Catalog Number: _____
Contractor: _____ Notes: _____

LED Slim Recessed Downlighting

COLOR SELECTABLE

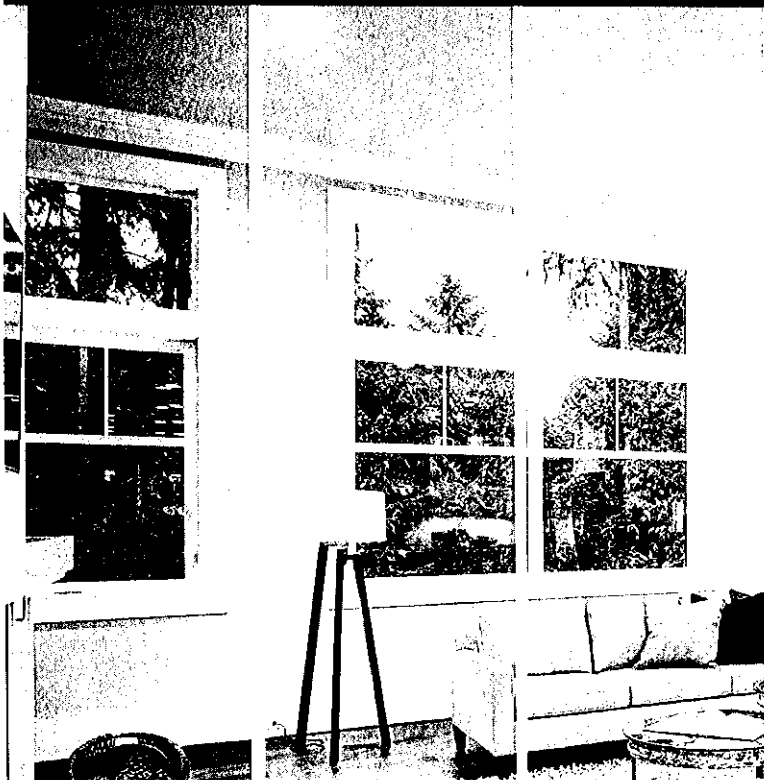

Designed for New or Remodel Applications

Topaz's LED Slim Recessed Downlights feature a selectable CCT switch for various installation options. A low profile design facilitates mounting in confined ceilings or narrow soffits. Rated for IC and damp locations, this easy-to-install fixture does not require a separate housing as it can be mounted directly into the ceiling. Optional frame-in kit available for new construction applications. Dimmable with leading-edge incandescent or LED style dimmers. These Energy Star certified fixtures are available in 4" and 6" models, with CCT range of 2700K-3000K-4000K.

FEATURES

- 2700K, 3000K or 4000K selectable CCT colors
- Remote J-box with low voltage cable provides flexibility in mounting
- Edge lit LED technology
- Advanced optics and thermal construction with low profile design
- New or remodel applications
- 85% energy savings compared to incandescent

SUGGESTED APPLICATIONS

- Retrofit and new construction
- Residential and multi-family
- Hospitality
- Schools





Job Name/Title: _____ Catalog Number _____
Contractor: _____ Notes: _____

LED Slim Recessed Downlighting

COLOR SELECTABLE

GENERAL SPECIFICATIONS

Input Voltage: 120VAC, 50/60Hz

Power Factor: 0.9

THD: <20%


Average Rated Life: 50,000 hours

CRI: 90



Ambient operating temperature: -4°F to 104°F

Beam Angle: 110°

*NOT
45° CUTOFF*

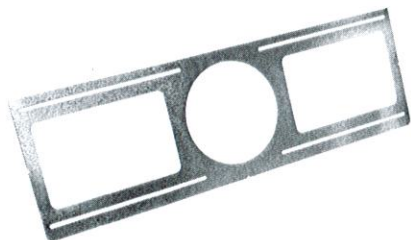

New Construction
4" and 6" Frame-in
Kits Available

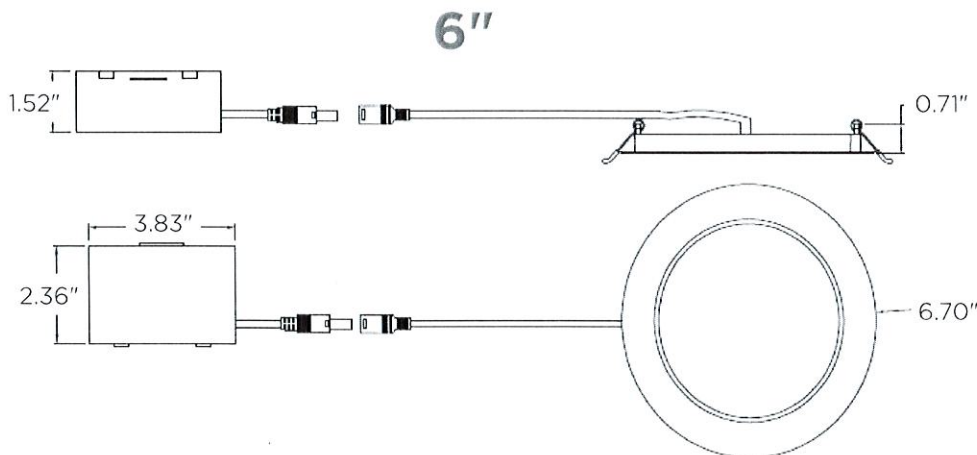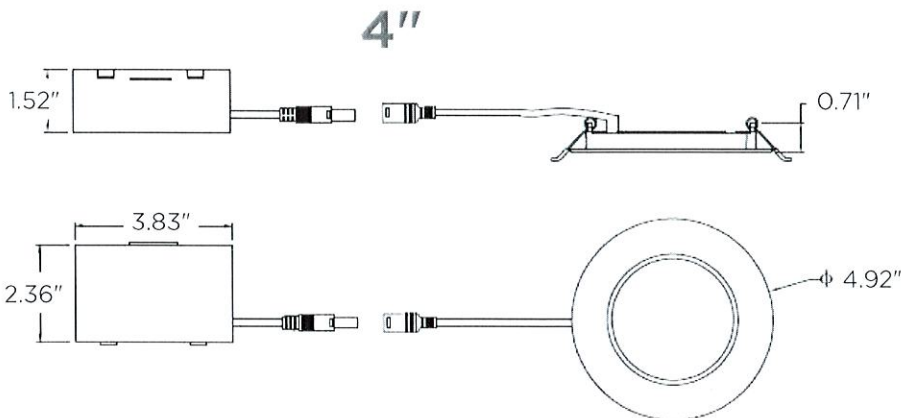

SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	UPC	CCT (Kelvin)	Wattage	Size	Lumens	Lumens Per Watt	Replacement Wattage	PK-Qty
RDL/4RND/9/CTS	77245	751338031739	2700K/3000K/4000K	9	4"	580	64	60	1/40
RDL/6RND/12/CTS	77247	751338031746	2700K/3000K/4000K	12	6"	900	75	75	1/20
RDL/6RND/12HL/CTS	77250	751338031753	2700K/3000K/4000K	12	6"	1,100	92	100	1/20
Frame-in Kits									
RDL4-FRAME KIT	77223				4"				48
RDL6-FRAME KIT	77225				6"				48

NOMENCLATURE

Example: **RDL/4RND/9/CTS**

RDL=Recessed Down Light / **4RND**=4" Round / **9**=9 Watts / **CTS**=Color Selectable

Dimming - These lamps are designed to be compatible with most leading edge or LED type dimmers. See www.topaz-usa.com
(Dimming range 100% - 10%) Performance may vary depending on dimmer.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.