

Smoke Tree Resort

Traffic Impact Analysis

7101 E. Lincoln Drive
Town of Paradise Valley, Arizona

February 2019
Project No. 18-0550

Prepared For:

Beus Gilbert, PLC
701 N. 44th Street
Phoenix, Arizona 85008

For Submittal to:

Town of Paradise Valley

Prepared By:



10605 North Hayden Road
Suite 140
Scottsdale, Arizona 85260
480-659-4250

SMOKE TREE RESORT TRAFFIC IMPACT ANALYSIS

**7101 E Lincoln Drive
Town of Paradise Valley, Arizona**

Prepared for:
Beus Gilbert PLLC
701 N 44th Street
Phoenix, Arizona 85008

For Submittal to:
Town of Paradise Valley

Prepared By:



CivTech, Inc.
10605 North Hayden Road
Suite 140
Scottsdale, Arizona 85260
(480) 659-4250



Expires 3-31-2019

February 2019

CivTech Project No. 18-0550

TABLE OF CONTENTS

EXECUTIVE SUMMARY1

INTRODUCTION.....4

EXISTING CONDITIONS6

SURROUNDING LAND USE6

EXISTING ROADWAY NETWORK6

EXISTING INTERSECTION CONFIGURATION6

EXISTING TRAFFIC VOLUMES 10

EXISTING CAPACITY ANALYSIS..... 12

PROPOSED DEVELOPMENT.....14

SITE LOCATION 14

SITE ACCESS 14

TRIP GENERATION 16

TRIP DISTRIBUTION AND ASSIGNMENT 17

FUTURE BACKGROUND TRAFFIC.....20

TOTAL TRAFFIC20

TRAFFIC AND IMPROVEMENT ANALYSIS25

INTERSECTION CAPACITY ANALYSIS.....25

QUEUE LENGTH ANALYSIS30

SIGHT DISTANCE ANALYSIS31

CONCLUSIONS.....33

LIST OF REFERENCES36

TECHNICAL APPENDIX37

LIST OF TABLES

Table 1: Level of Service Criteria	12
Table 2: Existing Peak Hour Levels of Service	13
Table 3: Trip Generation Summary	16
Table 4: Site Trip Distribution	17
Table 5: Growth Rate Expansion Factors	20
Table 6: 2020 Peak Hour Analysis	25
Table 7: 2025 Peak Hour Analysis	27
Table 8: Queue Storage Lengths	30
Table 9: AASHTO Sight Distance Requirements	31

LIST OF FIGURES

Figure 1 - Vicinity Map	5
Figure 2 - Existing Lane Configurations and Stop Control	9
Figure 3 - Existing Traffic Volumes	11
Figure 4 - Site Plan and Access	15
Figure 5 - Trip Distribution	18
Figure 6 - Site Generated Traffic Volumes	19
Figure 7 - 2020 Background Traffic Volumes	21
Figure 8 - 2025 Background Traffic Volumes	22
Figure 9 - 2020 Total Traffic Volumes	23
Figure 10 - 2025 Total Traffic Volumes	24
Figure 11 - Proposed Lane Configurations and Traffic Control	29

EXECUTIVE SUMMARY

This report documents a traffic impact analysis performed for the proposed Smoke Tree Resort south of Lincoln Road between Mockingbird Lane and Scottsdale Road in the Town of Paradise Valley. The proposed development will consist of maximum of 120 hotel rooms and a maximum of 30 residential units of 1,200 SF each above the hotel rooms, of which 15 will have a lock-off feature.

CivTech, Inc. has been retained by Beus Gilbert PLLC to perform the traffic impact study for the proposed redevelopment. The purpose of this assessment is to address the traffic and transportation impacts of the proposed development on the surrounding streets and intersections.

The following conclusions have been documented in this study.

General

- The proposed development is anticipated to generate approximately 1,032 weekday daily trips, with 69 trips occurring in the AM peak hour and 101 trips occurring in the PM peak hour.

Existing Conditions

- The results of the existing conditions analysis indicates that all intersections currently operate at an overall acceptable level of service (LOS D or better), with the exception of the intersections of Apartment Driveway & Lincoln Drive and AJ's Driveway & Lincoln Drive under the existing lane configurations.
 - The intersections of **Apartment Driveway & Lincoln Drive and AJ's Driveway & Lincoln Drive** experience delays in the northbound left turn approach and southbound left turn. Both of these approaches and driveways are driveways for AJ's Fine Foods and existing Apartments. It is possible that a raised median will be installed along the length of Lincoln Drive.

Opening Year 2020

- The results of the 2020 opening year Synchro analysis indicates that all study intersections are anticipated to experience an acceptable level of service, with the exception of the following intersections:
 - The intersection of **Mockingbird Lane & Lincoln Drive** is expected to experience delay on the northbound and southbound approaches during the no build and the full build scenario. By increasing the southbound left turn phase from 9 seconds to 19 seconds and changing the northbound left turn phase from permissive to permissive-protected, the southbound approach delay is expected to decrease from 56 seconds per vehicle to 55.1 seconds per vehicle during the AM peak hour and decrease from 58.7 seconds per vehicle to 55.4 seconds per vehicle during the PM peak hour. The northbound approach delay is expected to decrease from 48 seconds per vehicle to 43.3 seconds per vehicle during the AM peak hour and decrease from 58.7 seconds per vehicle to 57.3 seconds per vehicle

- in the PM peak hour, which is very close to what is considered an acceptable level of service.
- The intersections of **Apartment Driveway & Lincoln Drive** and **AJ's Driveway & Lincoln Drive** experience delays in the northbound left turn approach and southbound left turn. Both of these approaches and driveways are driveways for AJ's Fine Foods and the existing Lincoln Apartments. The addition of Smoke Tree Resort is not the cause of these delays, which remains consistent with the existing condition.
 - The intersection of **Scottsdale Road & Lincoln Drive** is expected to experience delay on the eastbound and westbound approaches during both the AM and PM peak hours for both the no build and full build scenarios. The intersection is expected to operate at an overall acceptable level of service (LOS D or better) during both the AM and PM peak hours of both scenarios, however, the eastbound and westbound approach delay could be improved by increasing the eastbound phase from 30 seconds to 32 seconds and increasing the westbound phase from 13 seconds to 21 seconds. This change is expected to decrease the overall intersection delay from 46.4 seconds per vehicle to 25 seconds per vehicle in the AM peak and increase the overall intersection delay from 44.9 seconds per vehicle to 52.1 seconds per vehicle in the PM peak hour. Although the PM peak hour overall intersection delay is expected to increase, the individual approach delays for the eastbound and westbound decrease significantly. The eastbound approach is expected to decrease from 82.8 seconds per vehicle to 16 seconds per vehicle and the westbound approach is expected to decrease from 63.8 seconds per vehicle to 23.7 seconds per vehicle during the PM peak hour.
 - The intersection of **Quail Run Road and Access A** reports a delay of zero seconds using the HCM 6th edition methodology. No LOS is reported in the included appendices, however zero seconds of delay would yield an LOS of A, shown in the table.

Horizon year 2025

- The results of the 2025 horizon year Synchro analysis summarized in **Table 7** indicates that all study intersections are anticipated to experience an acceptable level of service, with the exception of the following intersections:
 - The intersections of **Apartment Driveway & Lincoln Drive** and **AJ's Driveway & Lincoln Drive** experience delays in the northbound left turn approach and southbound left turn. Both of these approaches and driveways are driveways for AJ's Fine Foods and the existing Lincoln Apartments. The addition of Smoke Tree Resort is not the cause of these delays, which remains consistent with the existing condition.
 - The intersection of **Scottsdale Road & Lincoln Drive** is expected to experience delay on the southbound, eastbound and westbound approaches during both the AM and PM peak hours for both the no build

and full build scenarios. By decreasing the cycle length from 130 seconds to 120 seconds and optimizing the green times, the overall intersection delay is expected to decrease from 76 seconds per vehicle to 58.2 seconds per vehicle during the AM peak hour and decrease from 62.7 seconds per vehicle to 57.7 seconds per vehicle during the PM peak hour. Although this mitigation measure is expected to decrease the approach delays and the overall intersection delay, if this signal is coordinated with any others along Scottsdale Road, changing the cycle length will interfere with the coordination and would not be recommended. The City of Scottsdale has stated that they have plans to change the eastbound approach configuration to dual left turn lanes and a shared through/right turn lane. It is not known when this change will occur, but it could improve the delay if the intersection is retimed.

- The intersection of **Quail Run Road and Access A** reports a delay of zero seconds using the HCM 6th edition methodology. No LOS is reported in the included appendices, however zero seconds of delay would yield an LOS of A, shown in the table.

Queue Storage and Sight Distance

- According to the CivTech study done for the Ritz Carlton, the newly signalized intersection of Quail Run Road and Lincoln Drive will have eastbound/westbound left turn lanes and a westbound right turn lane striped with 150 feet of storage each. While 150 feet is being proposed due to the current development agreement with Five Star Development for the Ritz Carlton, less is required to meet the recommended AASHTO length. The recommended storage lengths are provided for horizon year 2025 using the total traffic projections.
 - The Smoke Tree Resort is requesting a new full access driveway located approximately 80 feet west of the eastern most property line. The Town of Paradise Valley has stated that an eastbound right turn deceleration lane is required at this driveway. Using AASHTO methodology only 25 feet of storage is required, however, 50 feet is the minimum that should be recommended per AASHTO standards with a 90 foot taper.
- There are no existing obstructions to sight distance within the project intersections or along the included corners of the proposed intersection. Adequate site distance must be provided at the intersections to allow safe left and right turning movements from the development
 - The contractor should ensure that sight visibility is provided at all proposed intersections according to the distances and that sight triangles at public intersections are maintained according to the Town Code. All vegetation and trees should be maintained according to Town of Paradise Valley regulations.

INTRODUCTION

Smoke Tree Resort is currently 26 individual suites and bungalows. The site is being redeveloped and is proposed as a hotel with a maximum of 120 hotel rooms and a maximum of 30 residential units of 1,200 SF each above the hotel rooms, of which 15 will have a lock-off feature. The site is located on the south side of Lincoln Drive between Mockingbird Lane and Scottsdale road.

Study Requirements

This study analyzes the traffic impact due to the proposed development on the surrounding street network. The study will be prepared in conformance with the Town of Paradise Valley's Traffic Impact Analysis (TIA) Criteria and Traffic Impact Statement (TIS) Criteria, May 2015. The specific objectives of the study are:

- ◆ To determine whether the planned street system in the vicinity of the site is adequate to accommodate the increased traffic that results from the proposed development.
- ◆ To recommend additional street improvements or traffic control devices, where necessary, and to mitigate the additional site-generated traffic

Study Area

This study is classified as a Category 1 TIA meaning the study area is defined as all signalized and major unsignalized intersections within a ¼ -mile radius of the site. The following study area intersections have been evaluated:

- Mockingbird Lane & Lincoln Drive
- Quail Run Road & Lincoln Drive
- Smoke Tree Driveway West & Lincoln Drive
- Smoke Tree Driveway East & Lincoln Drive
- Medical Office Driveway West & Lincoln Drive
- Medical Office Driveway East & Lincoln Drive
- Apartment Driveway & Lincoln Drive
- AJ's Driveway & Lincoln Drive
- Scottsdale Road & Lincoln Drive

Horizon Years

Per the study requirements, a Category 1 Traffic Impact and Mitigation Analysis is required. Analysis will be conducted on the current conditions, the opening year and opening plus five years.

It is assumed that development will open in October 2020. For purposes of this study, the development will be assumed fully built out by 2020. Therefore, the analysis years to be analyzed for this study include opening year 2020 and horizon year 2025. A location map of the study area is provided in **Figure 1**.

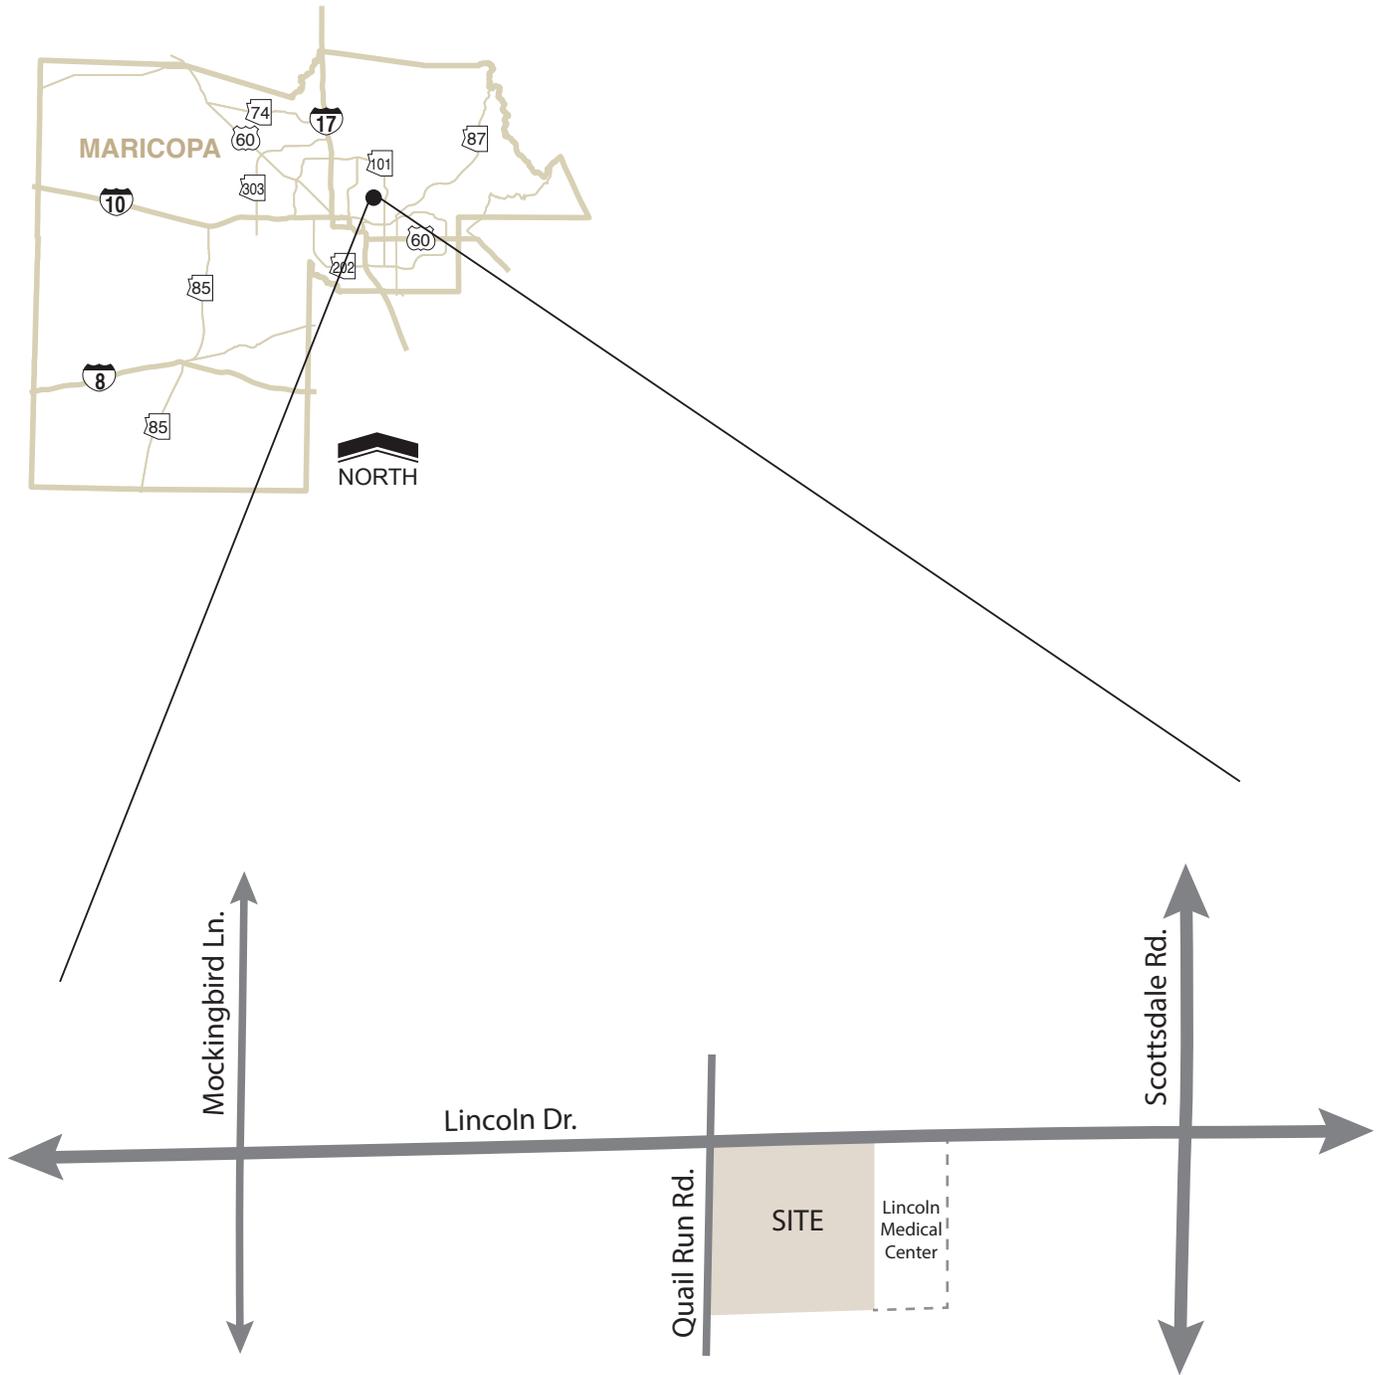


Figure 1: Vicinity Map

EXISTING CONDITIONS

SURROUNDING LAND USE

The surrounding area includes various land uses. Directly north of the site, on the north side of Lincoln Drive, is the site for the new Ritz Carlton luxury hotel. Bordering the site to the east is the site for the proposed Lincoln Medical Center expansion. West of the site are detached single-family homes. Northeast of the site is the Lincoln Scottsdale, multi-family apartment homes. Also within the vicinity of the site are many retail shops and restaurants.

EXISTING ROADWAY NETWORK

The existing roadway network analyzed in this study includes Mockingbird Lane, Lincoln Drive, Quail Run Road and Scottsdale Road.

Mockingbird Lane is a north-south three-lane road with one lane in each travelling direction and a continuous two-way-left-turn lane north of Lincoln Drive, and a two-lane road south of Lincoln Drive. Mockingbird Lane begins at the intersection with McDonald Road and continues north for approximately 2 miles before terminating at the intersection with Northern Avenue. The posted speed limit is 35 miles per hour (mph).

Lincoln Drive is an east-west four-lane road with two lanes in each travelling direction. Within the vicinity of the site, there are raised medians along portions of the road. Lincoln Drive begins just east of the State Route 51 freeway and continues east for approximately 7 miles before terminating at the intersection with Cattletrack Road, just west of the Arizona Canal. The posted speed limit is 40 mph within the vicinity of the site.

Quail Run Road is a north-south two-lane road with one lane in each travelling direction. Quail Run Road begins just north of a private property south of the site and continues north for approximately 0.15 miles before terminating at the intersection with Lincoln Drive. There is no posted speed limit.

Scottsdale Road is a north-south six-lane road with three lanes in each travelling direction within the vicinity of the site. There are broken, raised medians along the whole length of road. Scottsdale Road begins at the intersection with Rio Salado Parkway and continues north for approximately 18 miles before terminating at the intersection with Carefree Highway. The posted speed limit is 45 mph.

EXISTING INTERSECTION CONFIGURATION

The intersection of **Mockingbird Lane and Lincoln Drive** is a four-legged signalized intersection with protected left turns on the southbound and westbound approaches. The northbound and southbound approaches each have one dedicated left turn lane and a shared through and right turn lane. The eastbound and westbound approaches each have one dedicated left turn lane, one through lane, and one shared through and right turn lane. There are pedestrian crosswalks across all legs of the intersection.

The intersection of **Quail Run Road and Lincoln Drive** is a four-legged, stop-controlled intersection with free movements in the east and west directions. The northbound approach has one shared left turn/through/right turn lane. The eastbound approach has one through lane and one shared through and right turn lane. The westbound approach has two through lanes and a break in the median to allow for dedicated left turns. The southbound approach is currently a construction access point with one shared left turn/through/right turn lane.

The intersection of **Smoke Tree Driveway West and Lincoln Drive** is a three-legged, stop-controlled “T” intersection with free movements in the east and west directions. The northbound approach has one shared left turn and right turn lane. The eastbound approach has one through lane and one shared through and right turn lane. The westbound approach has two through lanes and a break in the median to allow for dedicated left turns.

The intersection of **Smoke Tree Driveway East and Lincoln Drive** is a three-legged, stop-controlled “T” intersection with free movements in the east and west directions. The northbound approach has one shared left turn and right turn lane. The eastbound approach has one through lane and one shared through and right turn lane. The westbound approach has two through lanes and a break in the median to allow for dedicated left turns.

The intersection of **Medical Office Driveway West and Lincoln Drive** is a three-legged, stop-controlled “T” intersection with free movements in the east and west directions. The northbound approach has one shared left turn and right turn lane. The eastbound approach has one through lane and one shared through and right turn lane. The westbound approach has two through lanes and a break in the median to allow for dedicated left turns.

The intersection of **Medical Office Driveway East and Lincoln Drive** is a three-legged, stop-controlled “T” intersection with free movements in the east and west directions. The northbound approach has one shared left turn and right turn lane. The eastbound approach has one through lane and one shared through and right turn lane. The westbound approach has two through lanes and a break in the median to allow for dedicated left turns.

The intersection of **Apartment Driveway and Lincoln Drive** is a four-legged, stop-controlled intersection with free movements in the east and west directions. The southbound approach consists of one dedicated left turn lane and one dedicated right turn lane. The eastbound approach consists of a two-way-left turn lane one through lane and one shared through and right turn lane. The northbound approach consists of one shared left turn and right turn lane. The westbound approach consists of a two-way left turn lane, on through lane and one shared through and right turn lane.

The intersection of **AJ’s Driveway and Lincoln Drive** is a four-legged, stop-controlled intersection with free movements in the east and west directions. The northbound approach has one shared left turn and right turn lane. The eastbound approach has a

two-way-left-turn lane, one through lane and one shared through and right turn lane. The southbound approach has one dedicated left turn lane and one dedicated right turn lane. The westbound approach has a dedicated left turn lane, one through lane and one shared through and right turn lane.

The intersection of **Scottsdale Road and Lincoln Drive** is a four-legged signalized intersection with split phasing on the eastbound and westbound approaches and protected left turns on the northbound and southbound approaches. The northbound approach has two dedicated left turn lanes, two through lanes and one shared through and right turn lane. The westbound approach has one dedicated left turn lane, one through lane and one shared through and right turn lane. The southbound approach has one dedicated left turn lane, three through lanes and one dedicated right turn lane. The eastbound approach has one dedicated left turn lane, one shared left turn and through lane and one dedicated right turn lane. There are pedestrian cross walks across all legs of the intersection.

The existing intersection configurations and traffic control is illustrated in **Figure 2**.

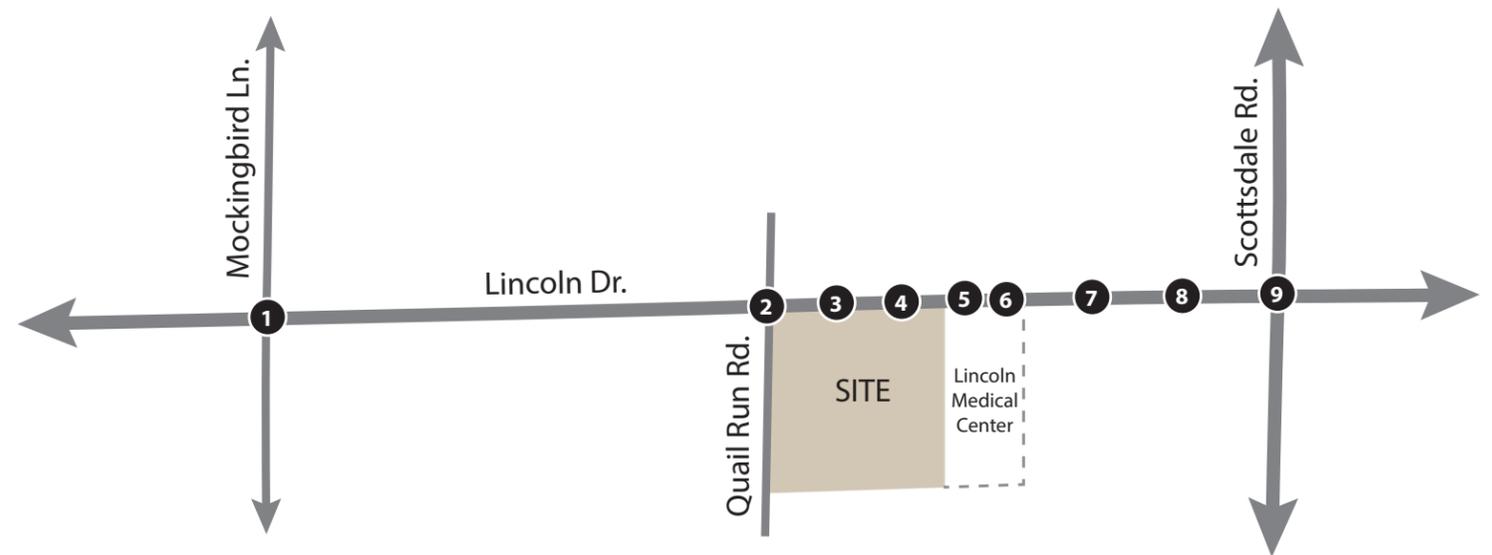
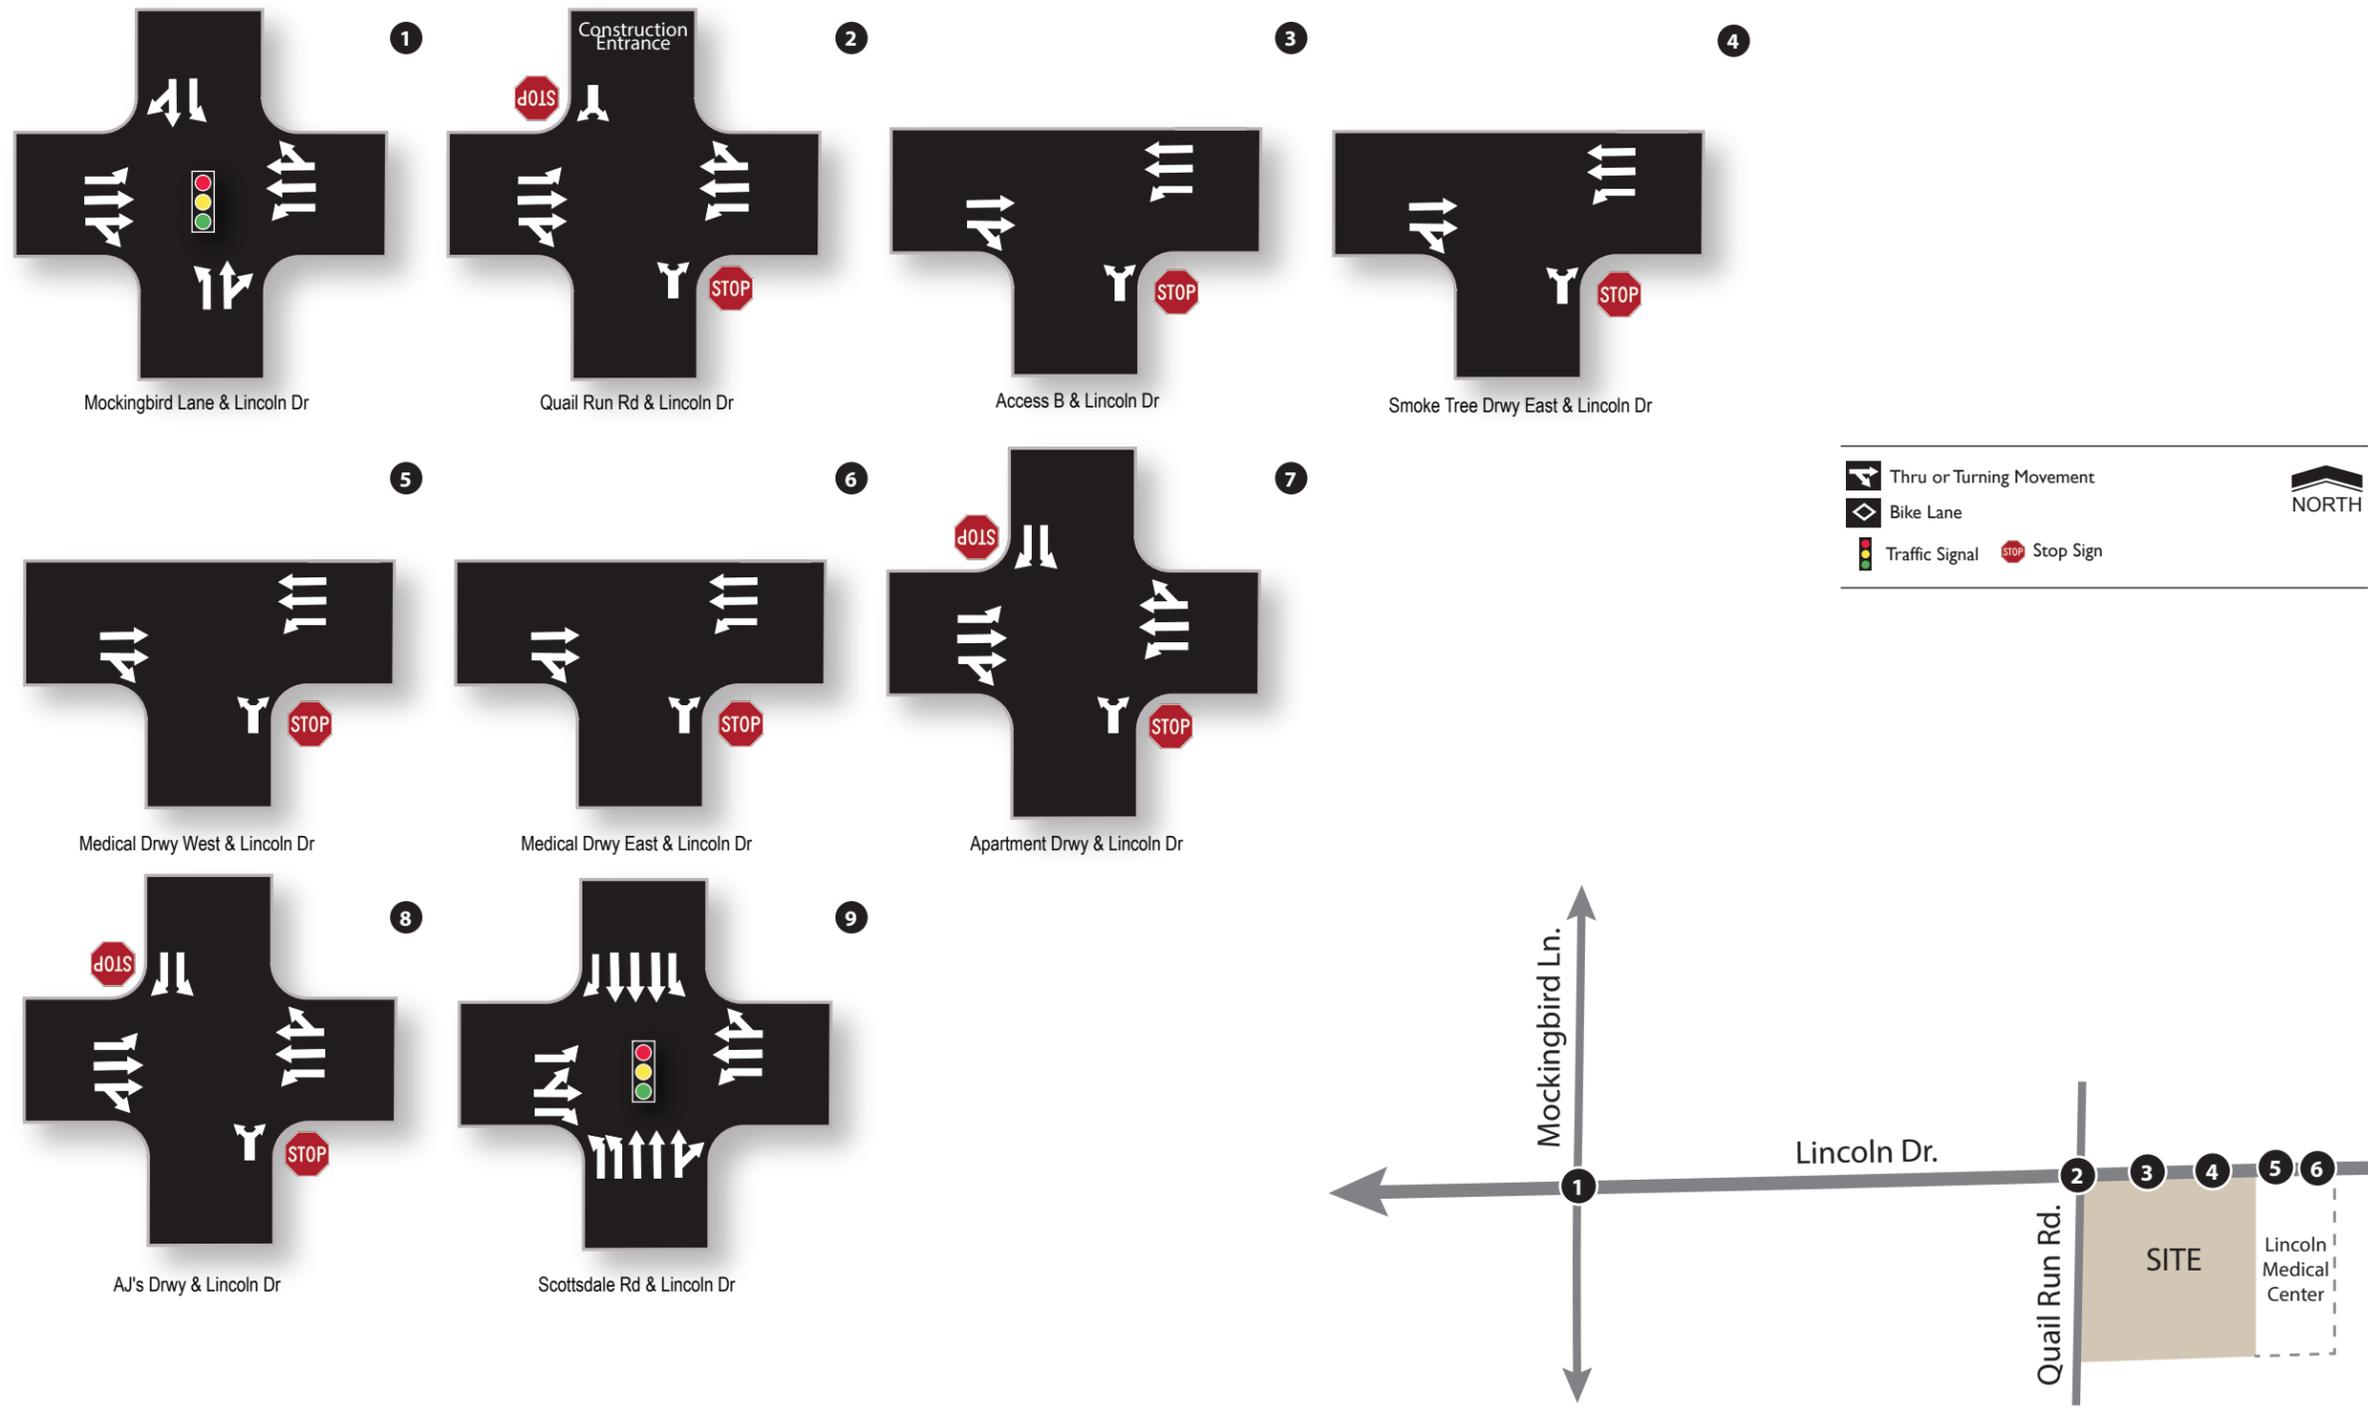


Figure 2: Existing Lane Configurations and Traffic Controls

EXISTING TRAFFIC VOLUMES

CivTech engaged Field Data Services of Arizona, Inc. to record traffic volumes at nine study intersections within the project vicinity. Peak hour volume turning movement counts were performed from 7:00-9:00 AM and 4:00-6:00 PM on Thursday, May 31, 2018. Peak hour turning movement counts were conducted at the following study intersections:

- Mockingbird Lane & Lincoln Drive
- Quail Run Road & Lincoln Drive
- Smoke Tree Driveway West & Lincoln Drive
- Smoke Tree Driveway East & Lincoln Drive
- Medical Office Driveway West & Lincoln Drive
- Medical Office Driveway East & Lincoln Drive
- Apartment Driveway & Lincoln Drive
- AJ's Driveway & Lincoln Drive
- Scottsdale Road & Lincoln Drive

The Town of Paradise Valley requires that a seasonal adjustment factor be applied to existing traffic counts taken outside of typical months. These traffic counts were conducted in May, and summer months typically have lower amounts of traffic due to school not being in session. The seasonal adjustment factor for the month of May is 1.01, however since they were conducted on the last day of the month, the adjustment factor for the month of June will be used to be more conservative. The seasonal adjustment factor for June is 1.03, this was applied to all traffic within the study area. Existing 2018 traffic volumes with the seasonal adjustment factor applied are presented in **Figure 3** for the weekday AM and PM peak hours. Raw traffic volume data obtained for this study have been included in **Appendix B**.

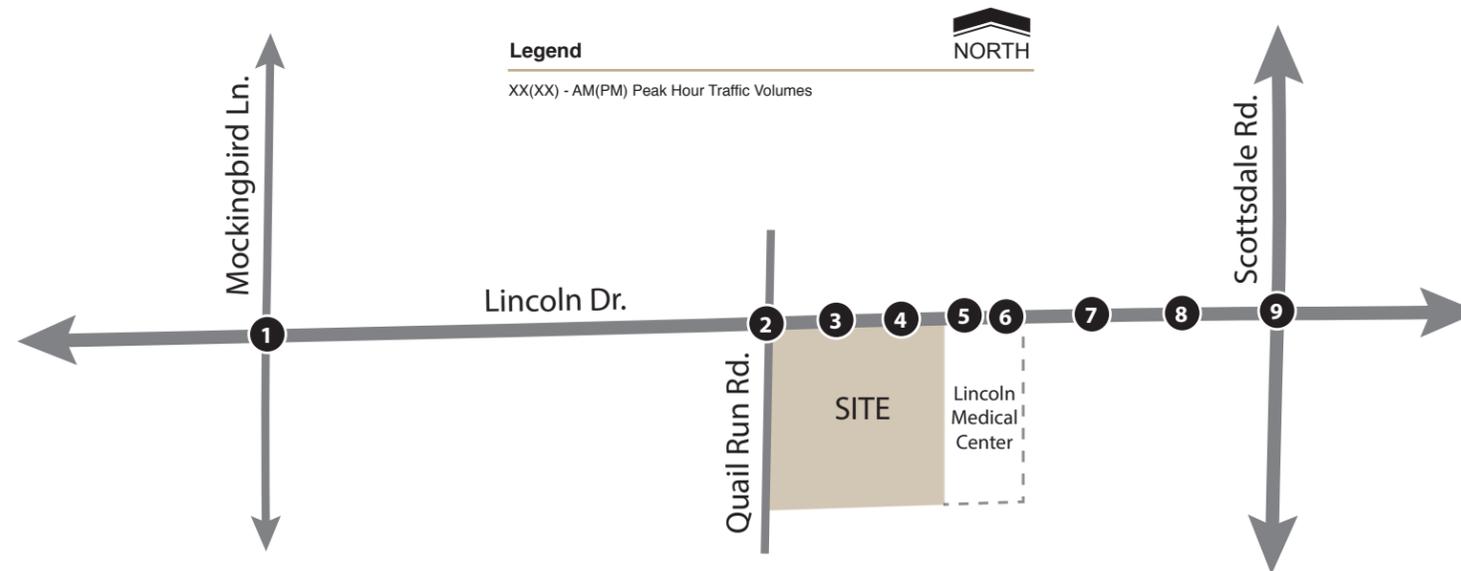
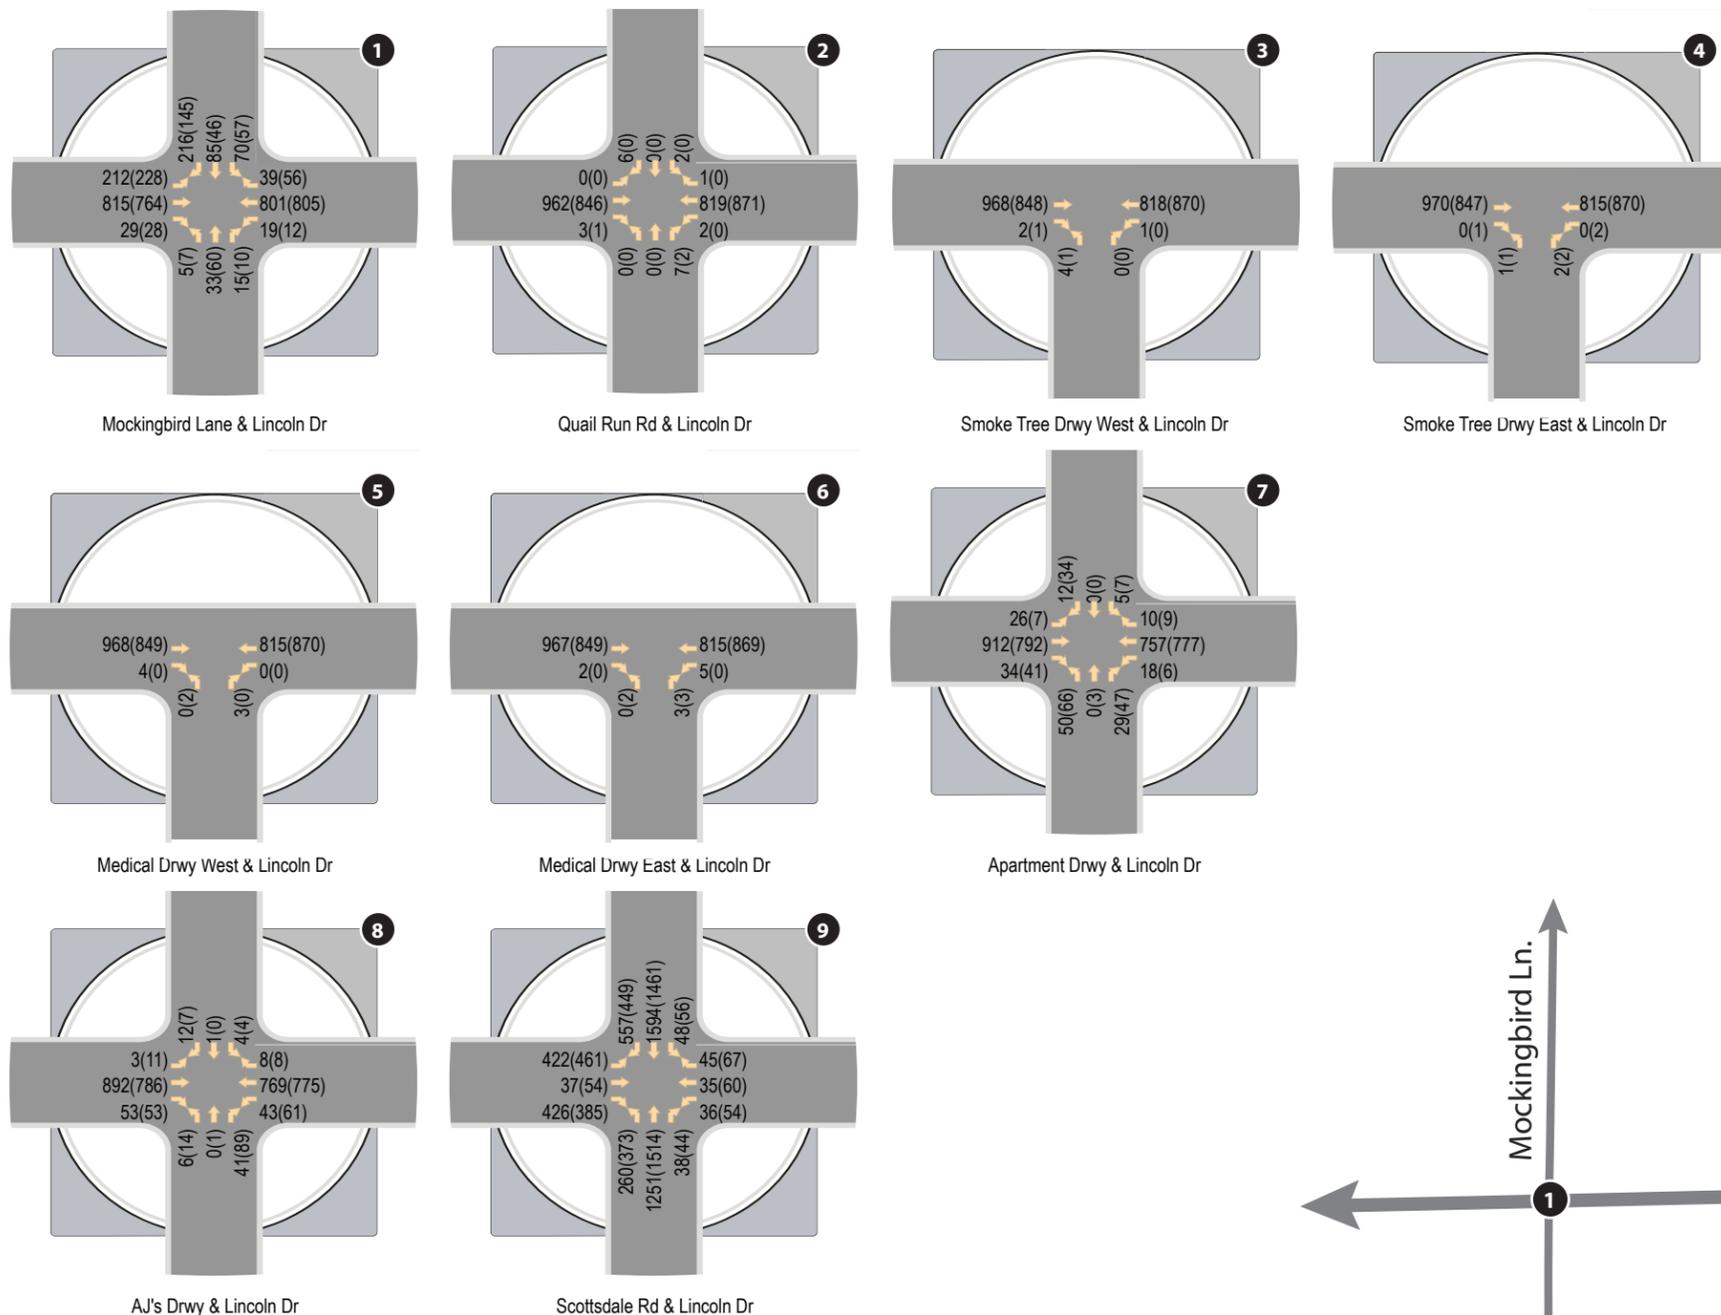


Figure 3: Seasonally Adjusted Existing Traffic Volumes

EXISTING CAPACITY ANALYSIS

Peak hour capacity analyses have been conducted for the study intersections based on existing intersection configurations and traffic volumes. All intersections have been analyzed using the methodologies presented in the *Highway Capacity Manual (HCM)*, *Special Report 209*, and Updated 2016 and using Synchro software, version 10.0 under the HCM 6th edition methodology.

The concept of level of service (LOS) uses qualitative measures that characterize operational conditions within the traffic stream. The individual levels of service are described by factors that include speed, travel time, freedom to maneuver, traffic interruptions, and comfort and convenience. Six levels of service are defined for each type of facility for which analysis procedures are available. They are given letter designations A through F, with LOS A representing the best operating conditions and LOS F the worst. Each level of service represents a range of operating conditions. Levels of service for intersections are defined in terms of delay ranges. **Table 1** lists the level of service criteria for signalized and unsignalized intersections, respectively.

Table 1: Level of Service Criteria

Level of Service	Control Delay (seconds/vehicle)	
	Signalized Intersections	Unsignalized Intersections
A	≤ 10	≤ 10
B	> 10-20	> 10-15
C	> 20-35	> 15-25
D	> 35-55	> 25-35
E	> 55-80	> 35-50
F	> 80	> 50

Source: Exhibit 19-8, Exhibit 20-2, Exhibit 21-8 and Exhibit 22-8, Highway Capacity Manual 2017

Synchro 10.0 software calculates the LOS per the HCM 6th edition methodology. The 6th edition HCM documents the signalized LOS calculation methodology which takes into account lane geometry, traffic volumes and cycle length/phasing to compute LOS. Synchro analysis worksheets report individual movement delay/LOS and overall delay/LOS for signalized intersections; unsignalized intersection worksheets report the worst-case delay/LOS and the average overall intersection delay. Signal timing data for the intersection of Mockingbird Lane and Lincoln Drive was provided by the Town of Paradise Valley. Timing for the intersection of Scottsdale Road and Lincoln Drive was provided by the City of Scottsdale. Results of the existing level of service analyses are shown in **Table 2** for both AM and PM peak hours. The existing conditions analysis worksheets have been included in **Appendix C**.

Table 2: Existing Peak Hour Levels of Service

ID	Intersection	Intersection Control	Approach/Movement	Existing LOS AM (PM)
1	Mockingbird Lane & Lincoln Drive	Signal	NB	D(E)
			SB	E(E)
			EB	B(A)
			WB	B(B)
			Overall	C(B)
2	Quail Run Road & Lincoln Drive	2-way stop (NB/SB)	NB Shared	B(B)
			SB Shared	C(A)
			EB Left	A(A)
			WB Left	B(A)
3	Smoke Tree Driveway West & Lincoln Drive	1-way stop (NB)	NB Shared	C(C)
			WB Left	B(A)
4	Smoke Tree Driveway East & Lincoln Drive	1-way stop (NB)	NB Shared	C(B)
			WB Left	A(A)
5	Medical Driveway West & Lincoln Drive	1-way stop (NB)	NB Shared	B(C)
			WB Left	A(A)
6	Medical Driveway West & Lincoln Drive	1-way stop (NB)	NB Shared	B(C)
			WB Left	B(A)
7	Apartment Driveway & Lincoln Drive	2-way stop (NB/SB)	NB Shared	F(F)
			SB Left	F(E)
			SB Right	B(B)
			EB Left	A(A)
			WB Left	B(A)
8	AJ's Driveway & Lincoln Drive	2-way stop (NB/SB)	NB Shared	C(D)
			SB Left	F(F)
			SB Right	B(B)
			EB Left	A(A)
			WB Left	B(B)
9	Scottsdale Road & Lincoln Drive	Signal	NB	C(C)
			SB	D(C)
			EB	E(E)
			WB	E(F)
			Overall	D(D)

The results of the existing conditions analysis summarized in **Table 2** indicates that all intersections currently operate at an overall acceptable level of service (LOS D or better), with the exception of the intersections of Apartment Driveway & Lincoln Drive and AJ's Driveway & Lincoln Drive under the existing lane configurations depicted in **Figure 2**.

The intersections of **Apartment Driveway & Lincoln Drive** and **AJ's Driveway & Lincoln Drive** experience delays in the northbound left turn approach and southbound left turn. Both of these approaches and driveways are driveways for AJ's Fine Foods and existing Apartments. It is possible that a raised median will be installed along the length of Lincoln Drive.

PROPOSED DEVELOPMENT

SITE LOCATION

The proposed redevelopment will be located 7101 East Lincoln Drive in the Town of Paradise Valley, Arizona.

SITE ACCESS

There are three access points proposed for this development, described as follows:

- Access A is a proposed access from Quail Run Road to the Smoke Tree site. The intersection of Quail Run Road and Lincoln Drive will be signalized by build out year 2020, and it is expected that some vehicles will utilize Quail Run Road to access the Smoke Tree site. This access will be a full movement access on the western border of the site.
- Access B is a proposed full movement access point on Lincoln Drive located approximately 80 feet west of the eastern Smoke Tree property line. The two existing access points to the site will be removed and replaced with this single access.
- Access C is a proposed access from Quail Run Road to Smoke Tree south of the proposed Access A. This access is proposed to be full access, however, due to the location, it is unlikely that many vehicles will be using this driveway and therefore, it was not included in the analysis of this report.

The two existing Smoke Tree Driveways, intersections 3 and 4, will both be removed by opening year 2020 and replaces with a single, full movement access located approximately 80 feet west of the eastern property line.

The proposed site plan is provided in **Figure 4**.

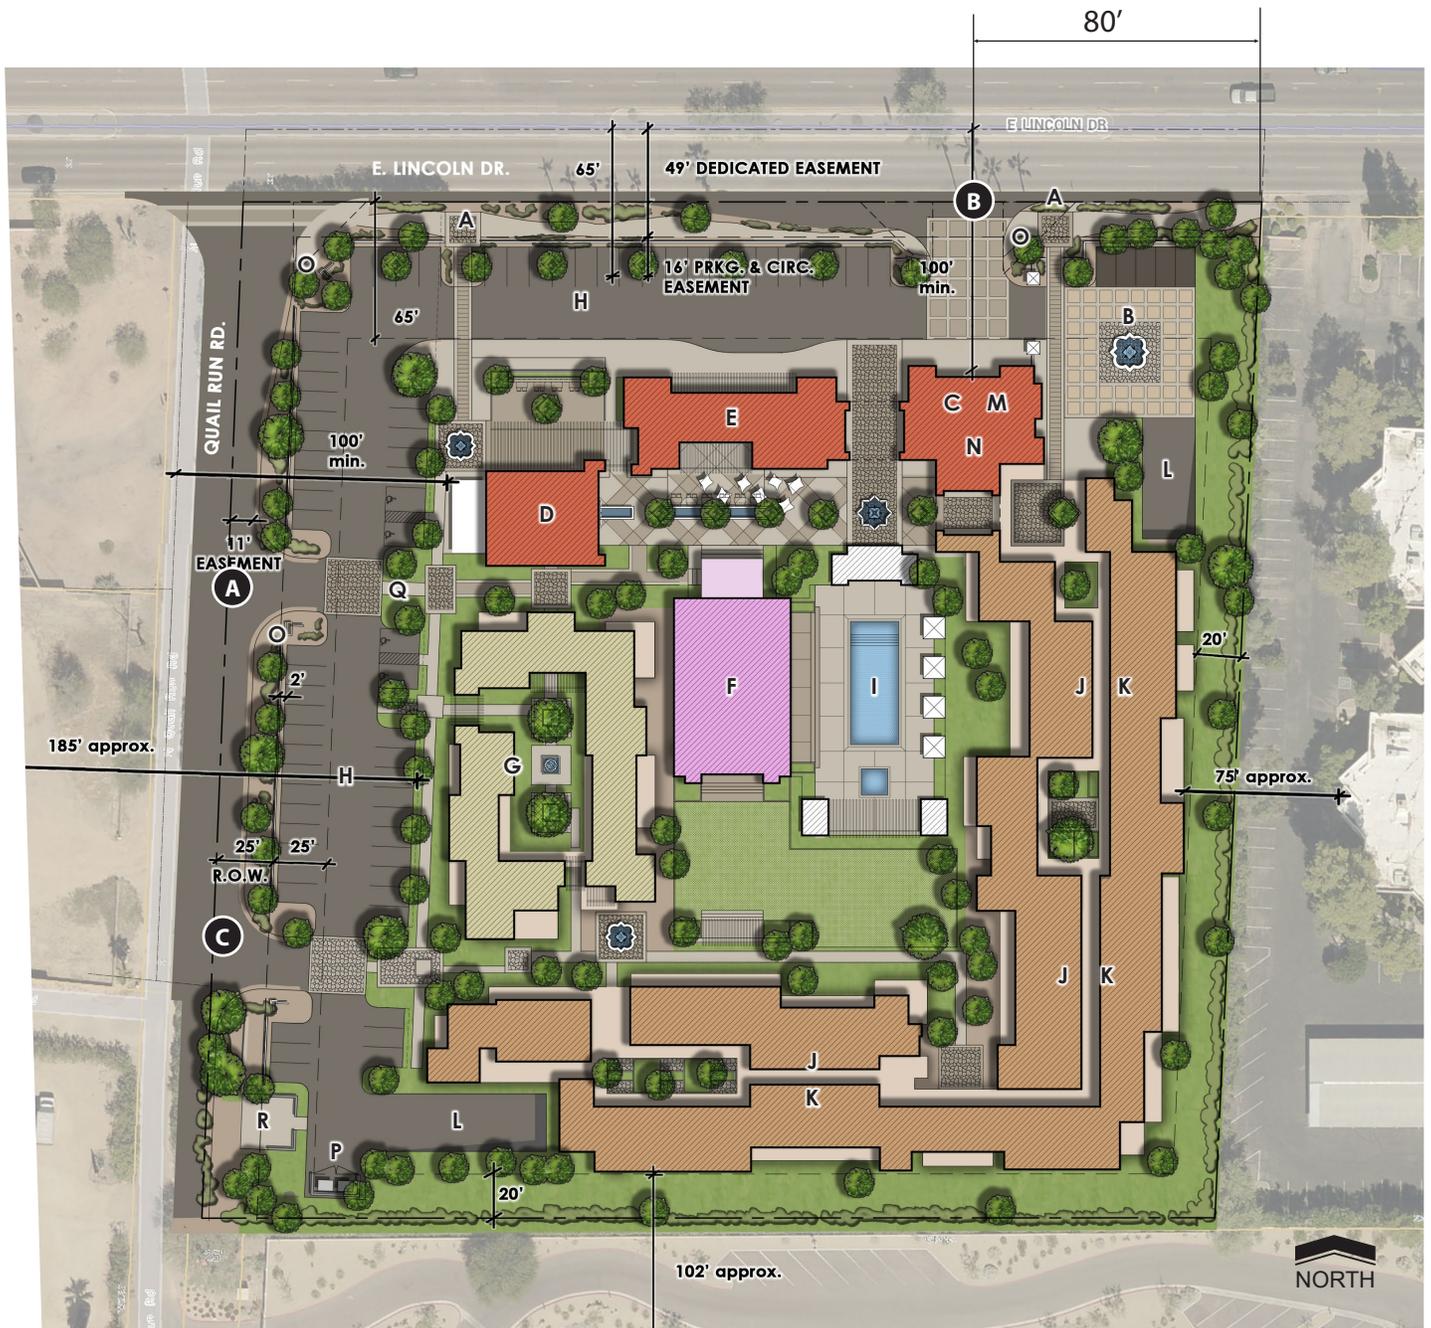


Figure 4: Site Plan and Access

TRIP GENERATION

The potential trip generation for the proposed development was estimated utilizing the Institute of Transportation Engineers (ITE) *Trip Generation Manual, 10th Edition* and *Trip Generation Handbook, 3rd Edition*. The ITE *Trip Generation Manual* contains data collected by various transportation professionals for a wide range of different land uses. The data are summarized in the report and average rates and equations have been established that correlate the relationship between an independent variable that describes the development size and generated trips for each categorized land use. The report provides information for daily and peak hour trips.

Since the Smoke Tree Resort is a proposed redevelopment of the current resort, some of the existing traffic counts are existing trips generated by the site. To be conservative, these trips were not subtracted from the existing traffic counts, meaning that there will actually be less “new trips” than mentioned in this study.

The proposed development will consist of a maximum of 120 standard hotel rooms, 30 residential units/condos, 15 lock-off units that will be owned by individuals and rented out to the public, and a 3,500 square foot quality restaurant. The lock-off residential units have been included in the analysis as part of the total hotel room count to present a worst-case scenario where all rooms have been rented at the same time. They have been included in the hotel room count since it is assumed that the owners of each unit will not use this as their primary residence and will rent it out to guests. The restaurant will be on the resort site, but is not intended to serve guests of the resort completely. An internal capture reduction reduces the number of external trips being made to the site. It is assumed that approximately 50% of all visitors to the restaurant will be off site and the other 50% will be guests and residents of the resort. The hotel is not a standard hotel, ITE land use code 310, nor would it be considered a resort hotel, ITE land use code 330. Custom trip rates were established by averaging the trip rates for a standard hotel and a resort hotel for the AM and PM peak hours as well as the daily trips. **Table 3** depicts the trip generation summary for the proposed development. Trip generation calculations are provided in **Appendix D**.

Table 3: Trip Generation Summary

Proposed Use	ITE LUC	Size	Units	Weekday Trips						
				Daily	AM			PM		
				Total	In	Out	Total	In	Out	Total
Hotel	310/330	135	Rooms	700	38	15	53	29	39	68
Condos	220	30	Dwelling Units	186	3	12	15	13	7	20
Quality Restaurant	931	3,500	SF	294	0	3	3	18	9	27
Total Trips				1,180	41	30	71	60	55	115
Internal Capture Reduction (Quality Restaurants 50%)				(148)	(0)	(2)	(2)	(9)	(5)	(14)
Subtotals				1,032	41	28	69	51	50	101

As shown in **Table 3**, the proposed development is anticipated to generate approximately 1,032 weekday daily trips, with 69 trips occurring in the AM peak hour and 101 trips occurring in the PM peak hour.

TRIP DISTRIBUTION AND ASSIGNMENT

A single trip distribution pattern was assumed for the proposed development. It is expected that the resort development will generate trips based on future population within a 7-mile radius of the site. Future total population within a 7-mile radius of the site, as predicted by the 2020/2030 socio-economic data compiled by the Maricopa Association of Governments (MAG), was used as a basis to estimate trip distribution for the resort development.

The resulting trip distribution percentages for the study area are shown in **Table 4**. The trip distribution calculations are included in **Appendix E**.

Table 4: Site Trip Distribution

Direction (To/From)	Trip Distribution
North on Mockingbird Ln	6%
South on Mockingbird Ln	4%
West on Lincoln Dr	25%
North on Scottsdale Rd	35%
South on Scottsdale Rd	30%
Total	100%

Figure 5 illustrates the trip distribution percentages shown in **Table 4** on the existing roadway network with the study area. The percentages presented in **Figure 5** were applied to the site trips generated to determine the AM and PM peak hour site traffic at the intersections within the study area. The resulting site generated traffic for the proposed development are presented in **Figure 6**.



Figure 5: Trip Distribution

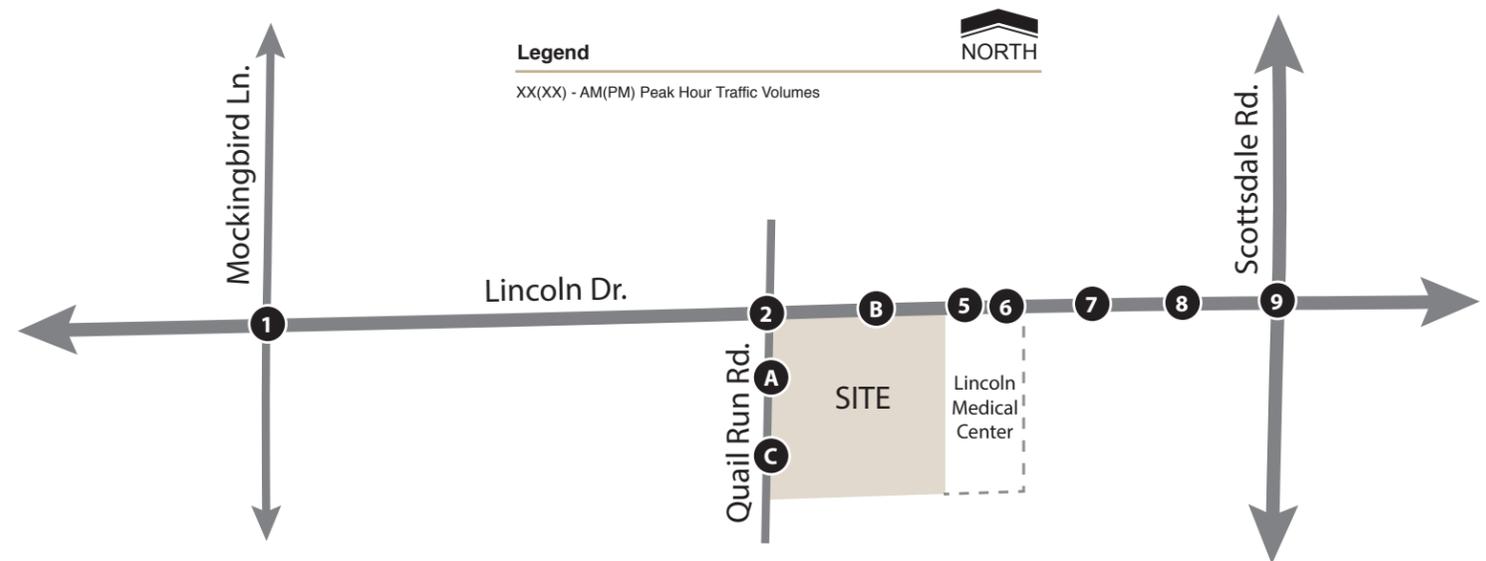
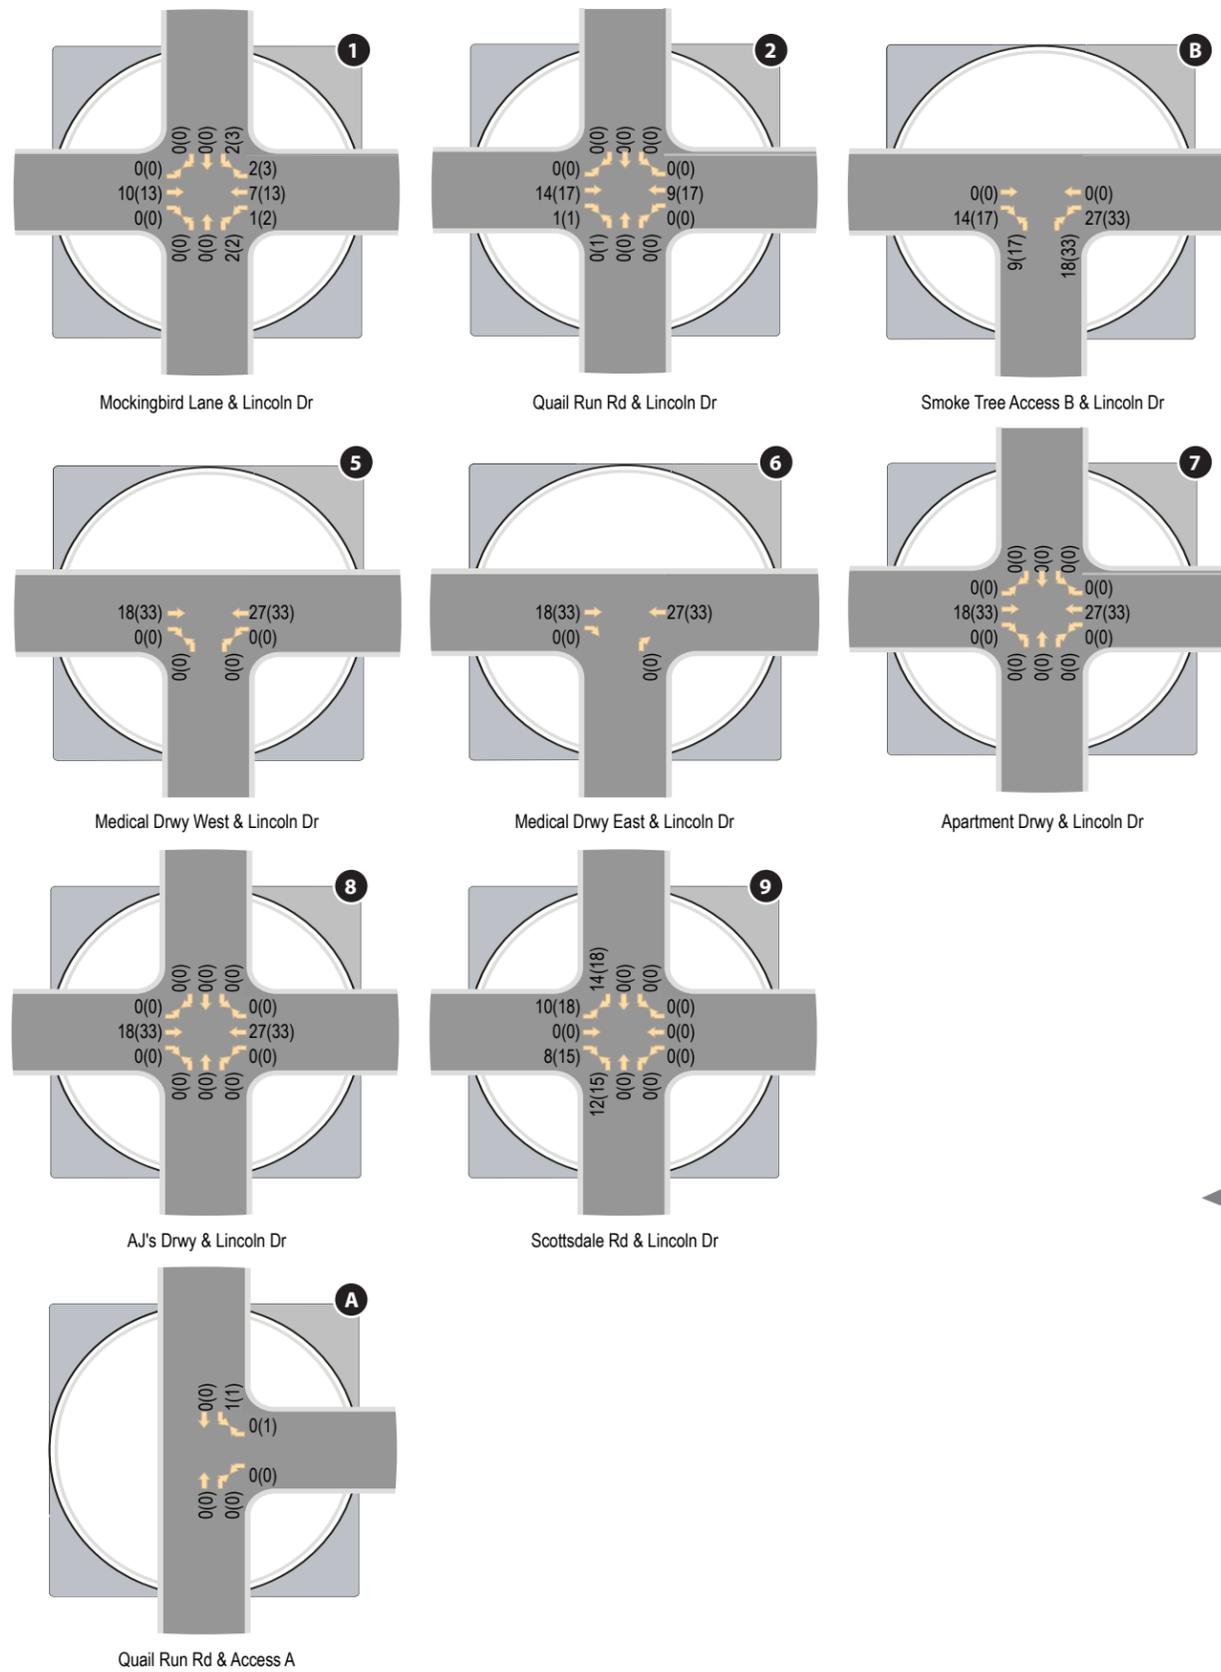


Figure 6: Site Generated Traffic Volumes

FUTURE BACKGROUND TRAFFIC

CivTech applied a growth rate to the seasonally adjusted traffic counts for this study in order to obtain the background traffic volumes along the adjacent roadway network. In reviewing the City of Scottsdale Traffic Counts Map, a 1.7% average growth rate was found within the proposed study area. **Table 5** shows the expansion factors used for the proposed opening year 2020 and horizon year 2025.

Table 5: Growth Rate Expansion Factors

Horizon Year	Expansion Factor
2020	1.034
2025	1.125

Applying the growth rate expansion factors to the seasonally adjusted existing traffic volumes predicts the volume of traffic anticipated on the surrounding area roads for opening year 2020 and horizon year 2025. Directly north of the proposed Smoke Tree Resort is the new Ritz Carlton Resort. Phase 1 of that development is expected to be open by 2020, meaning that it will be adding some site generated trips to the surrounding roadway network. Since CivTech was the company that performed the analysis for the Ritz Carlton in 2015, the site generated volumes expected for 2020 and 2025 were added to the grown existing volumes. Directly east of the proposed site is another proposed development, Lincoln Medical Center. It is expected that the Lincoln Medical expansion and the Smoke Tree Resort will begin and end construction at roughly the same time. Lincoln Medical Center is also expected to add additional traffic to the surrounding roadway network. The proposed site generated trips were assigned to the surrounding roadway network, and these trips were also added to the grown existing volumes.

The same methodology was used for both horizon years. Calculated background traffic for opening year 2020 and horizon year 2025 is presented in **Figure 7** and **Figure 8**, respectively. Seasonally adjusted existing traffic volumes, Ritz Carlton site volumes, Smoke Tree site volumes and more detailed background traffic calculations are included in **Appendix F**.

TOTAL TRAFFIC

Total traffic was determined by adding the site generated traffic to the projected background traffic. Total peak hour traffic volumes for the opening year 2020 and horizon year 2025 are shown in **Figure 9** and **Figure 10**, respectively.

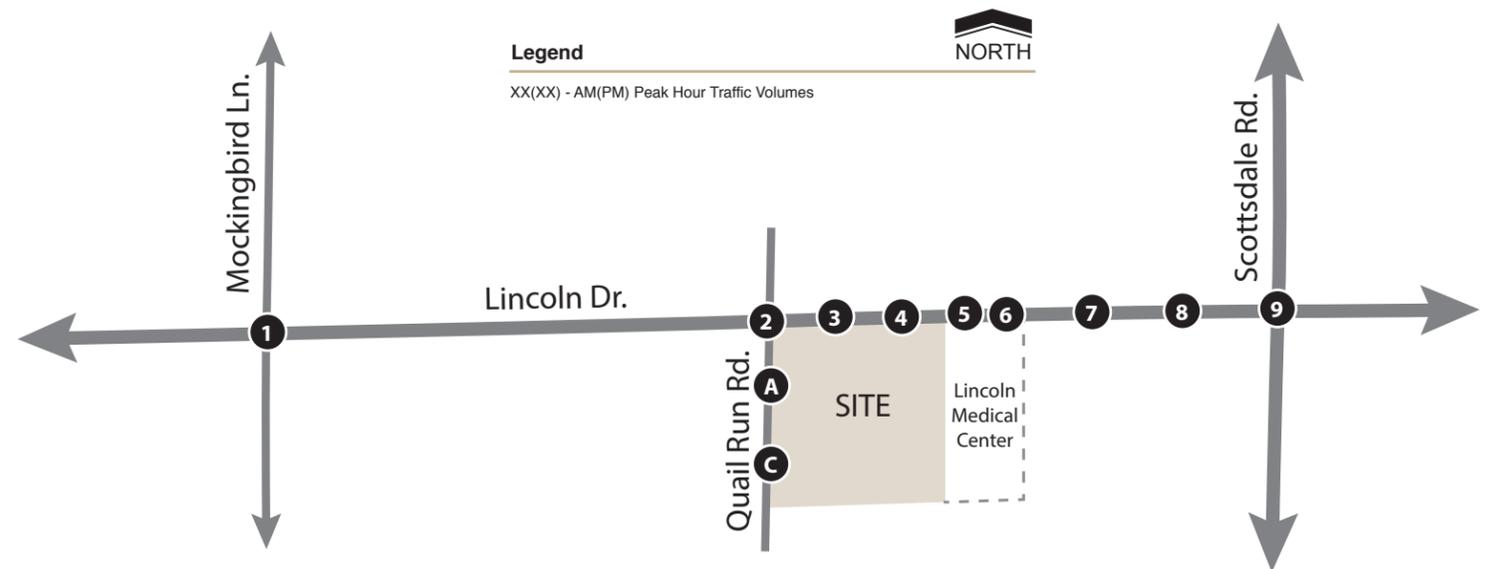
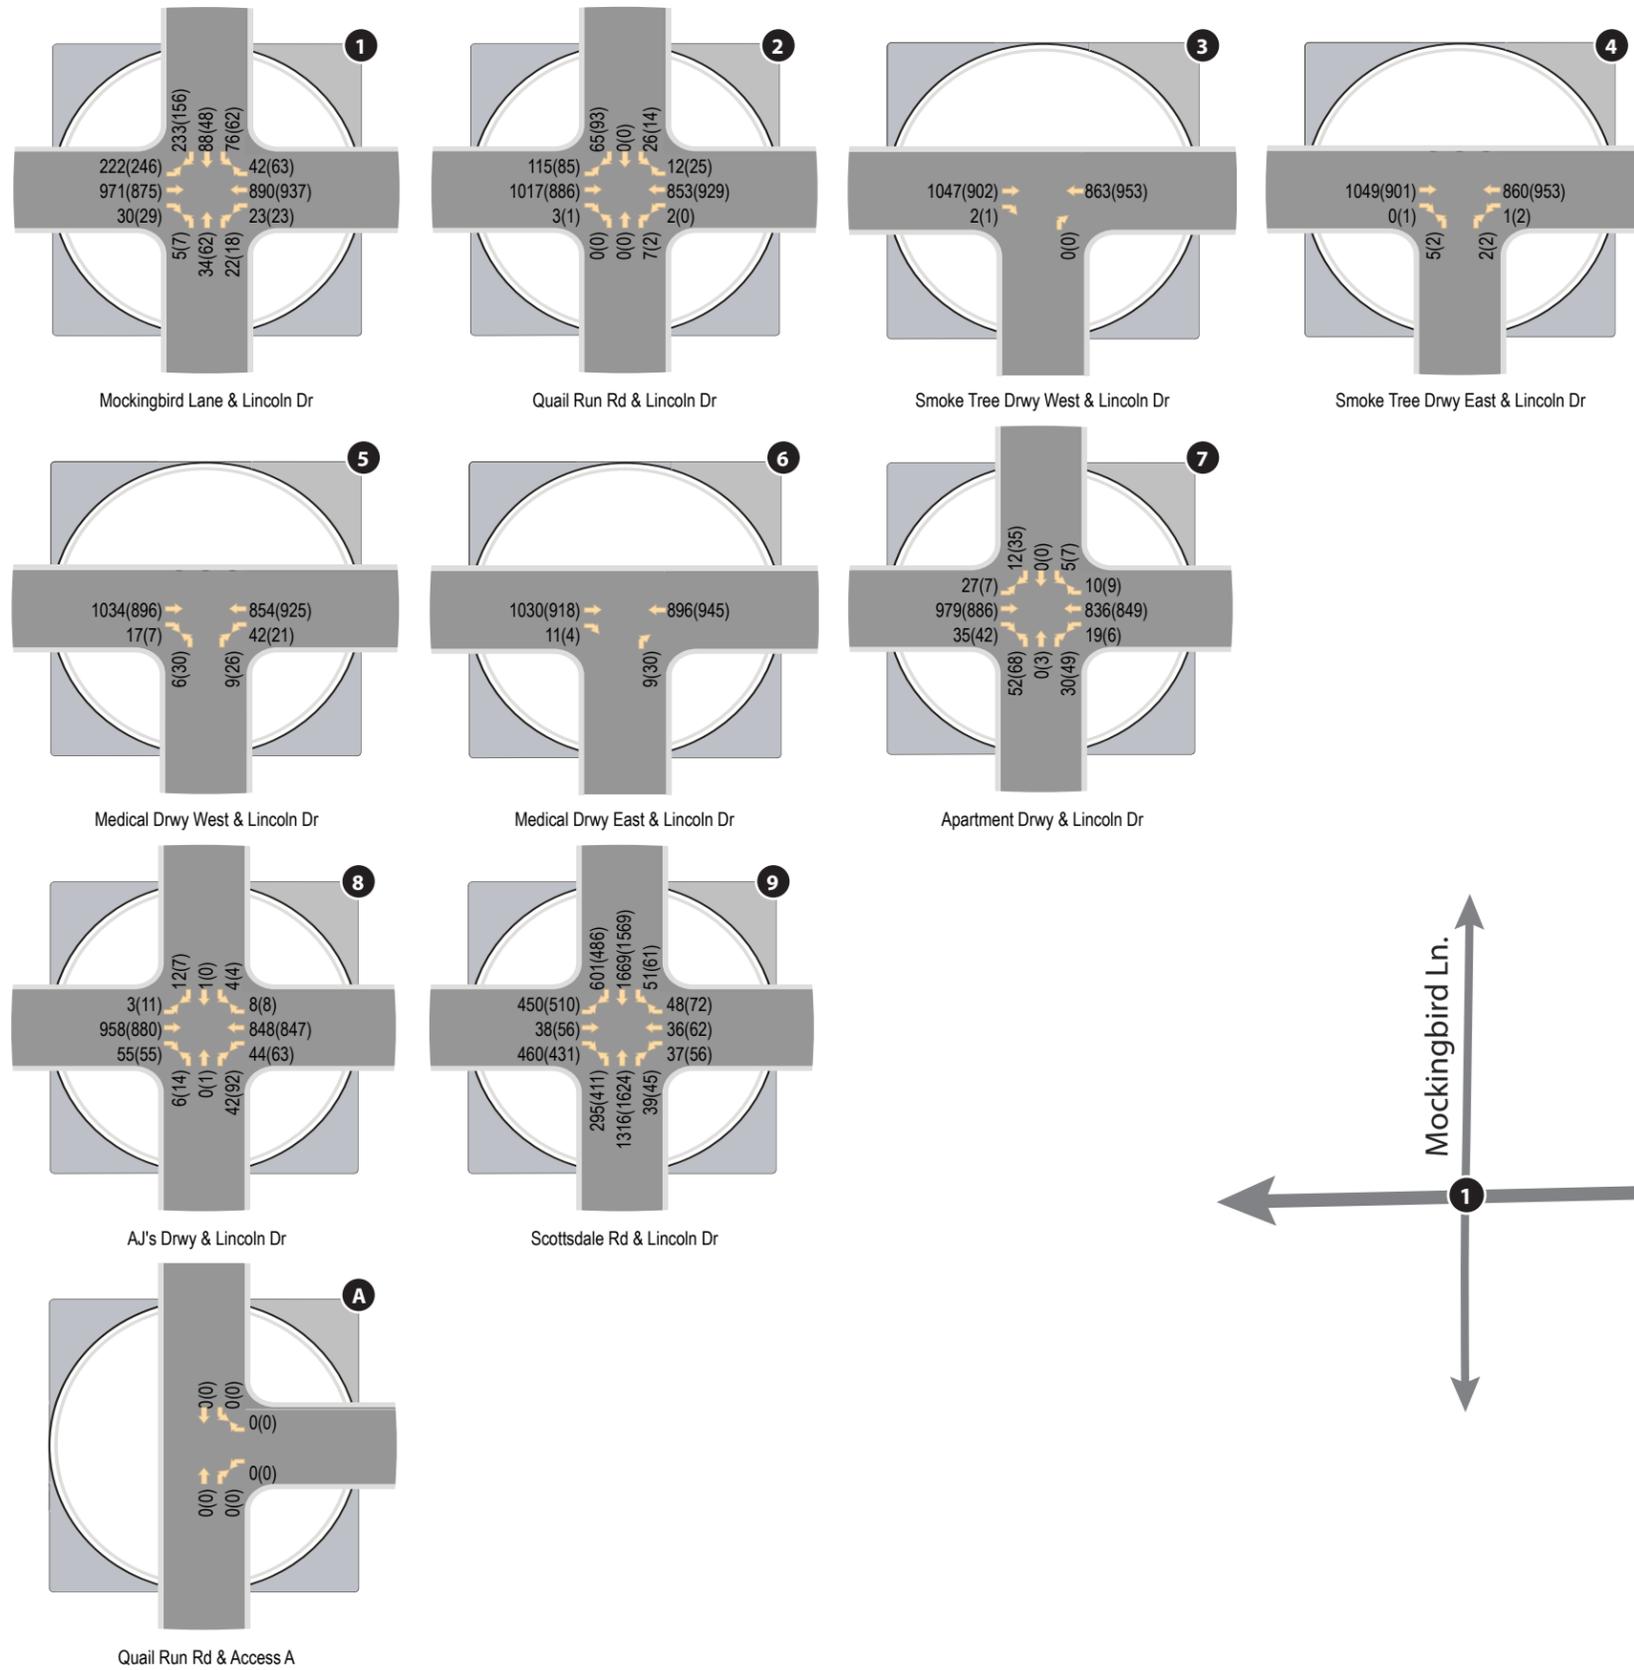


Figure 7: 2020 Background Traffic Volumes

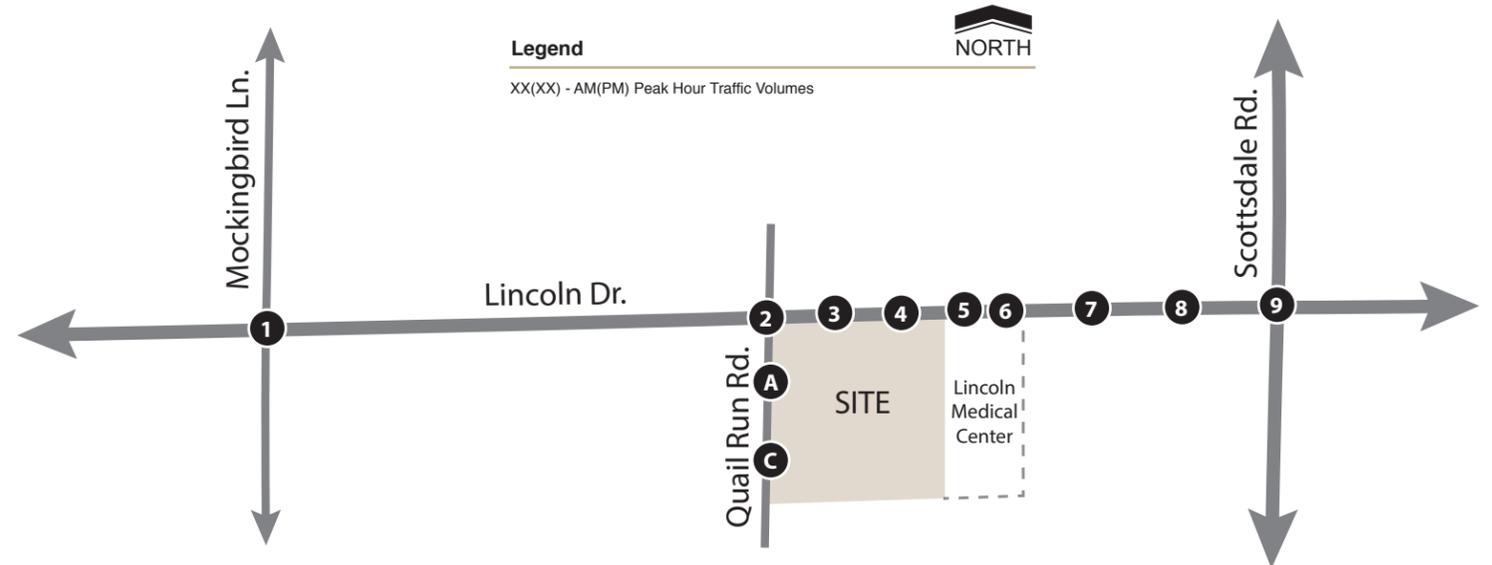
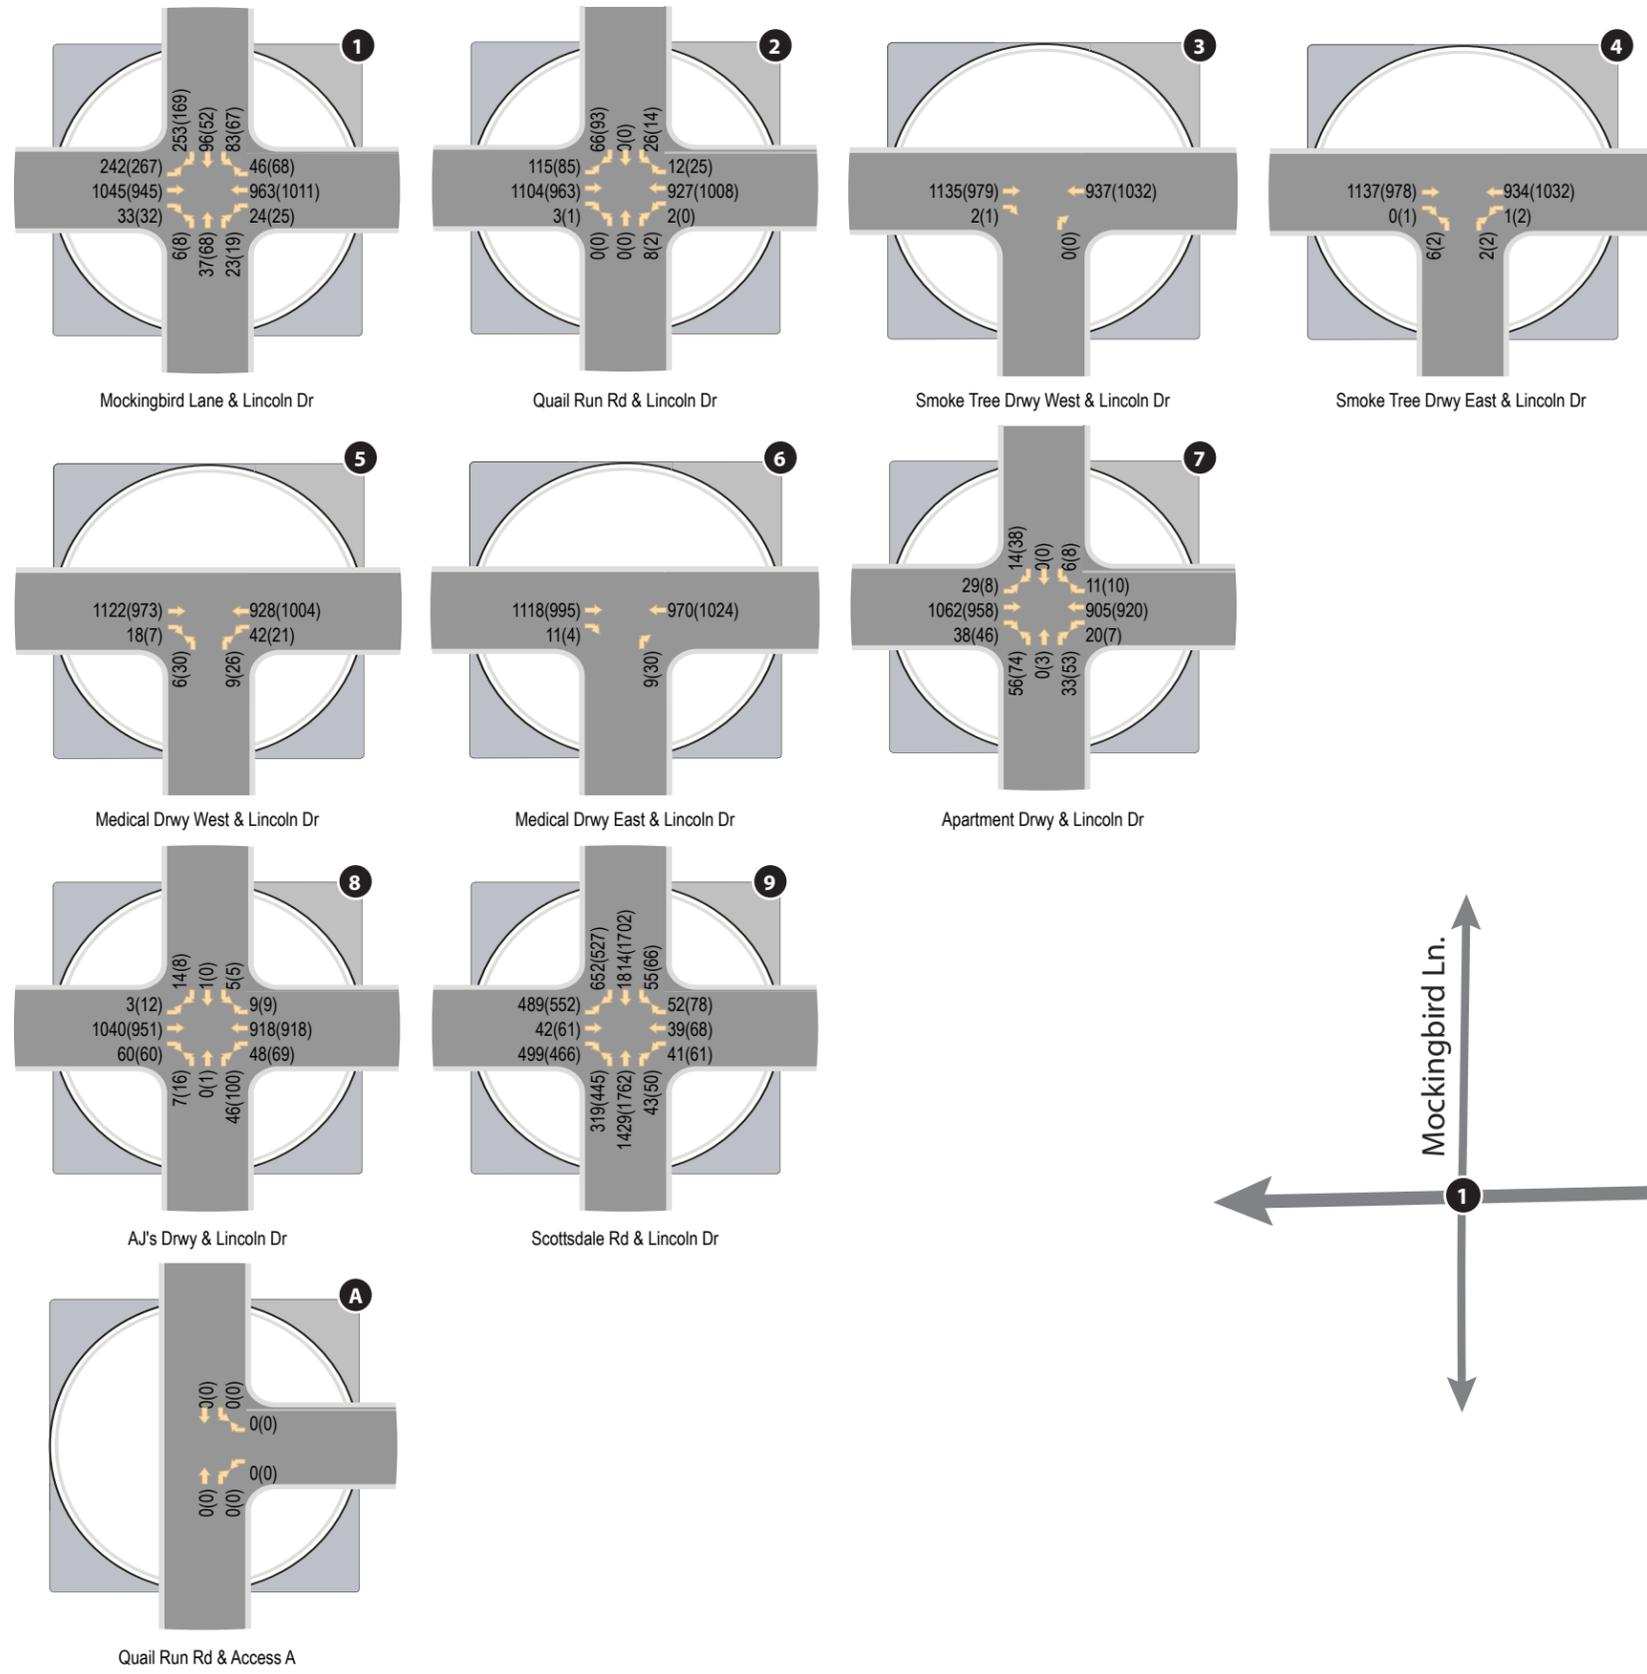


Figure 8: 2025 Background Traffic Volumes

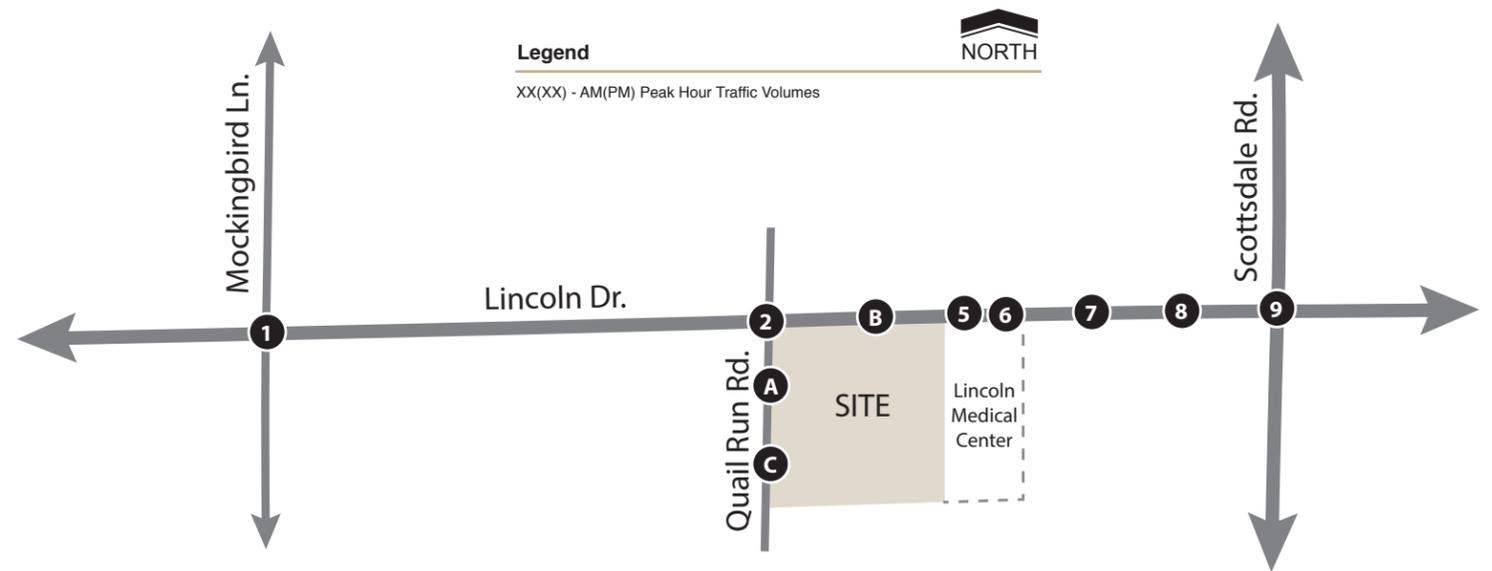
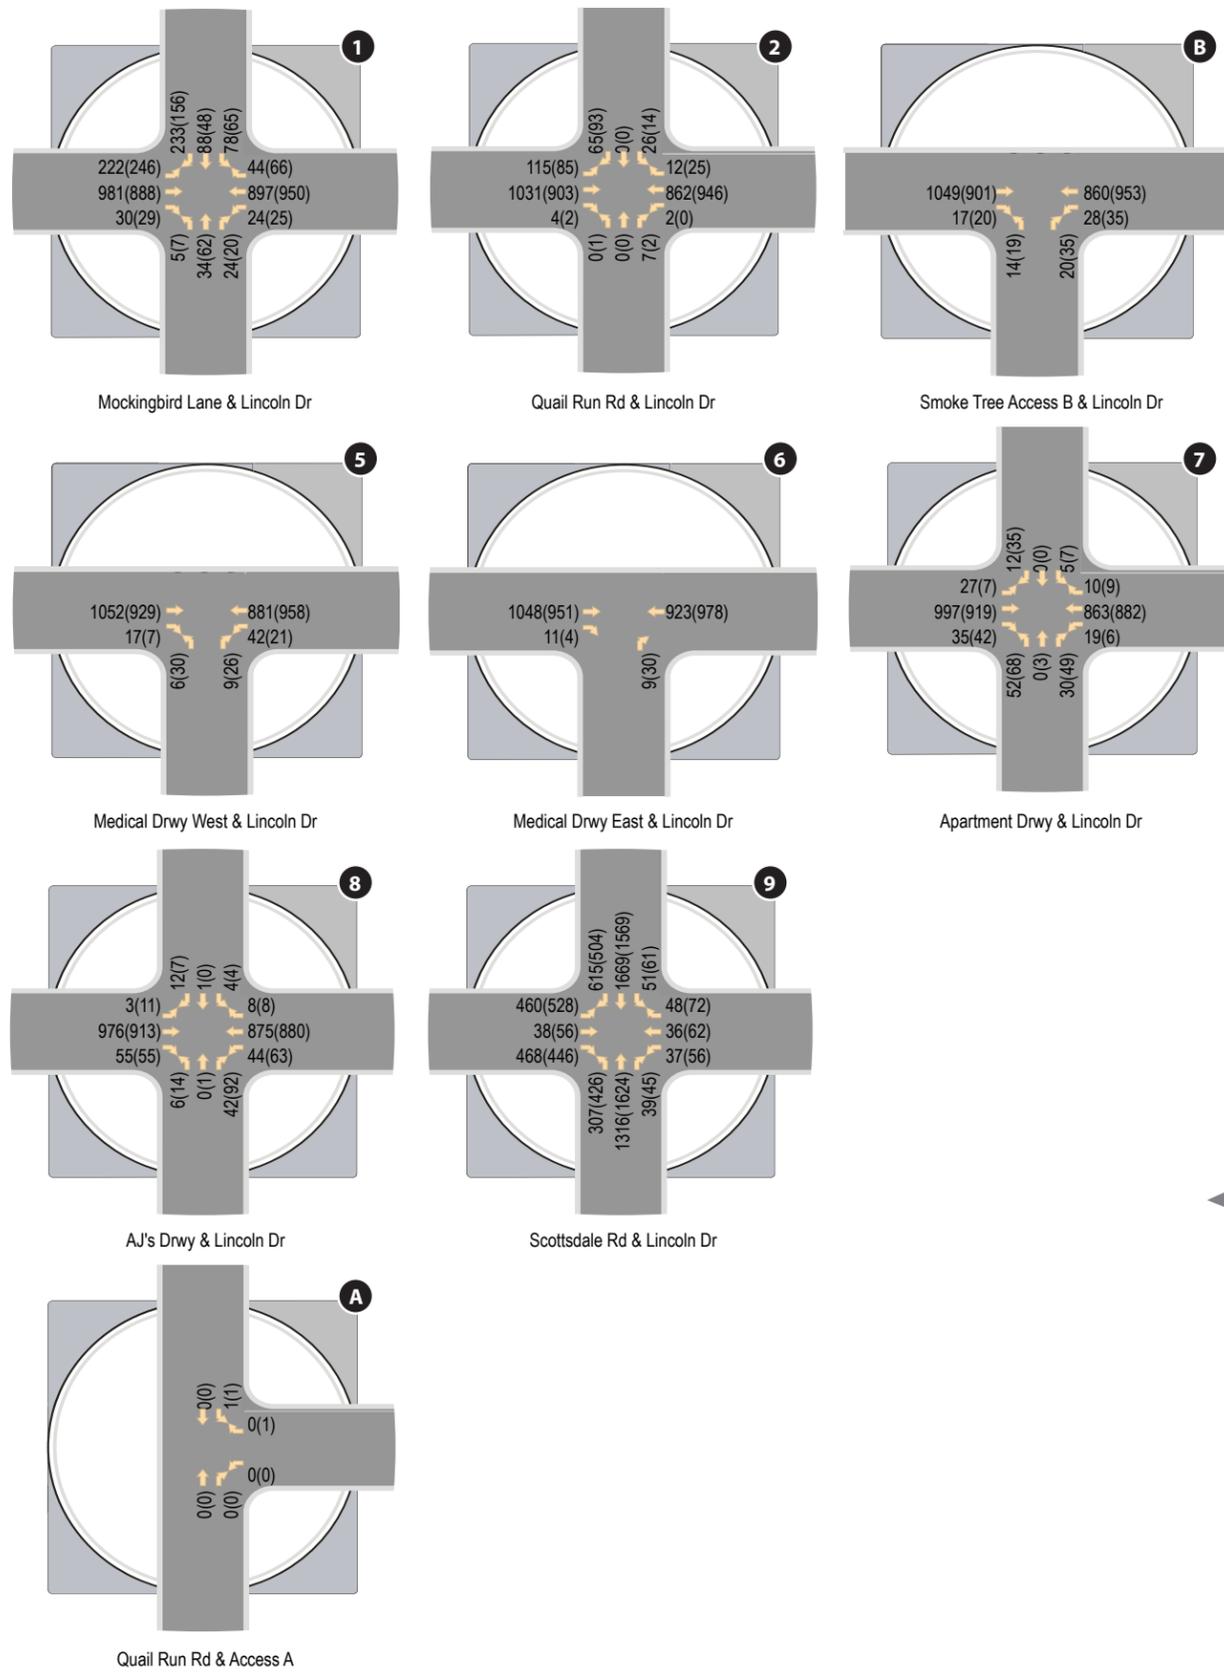


Figure 9: 2020 Total Traffic Volumes

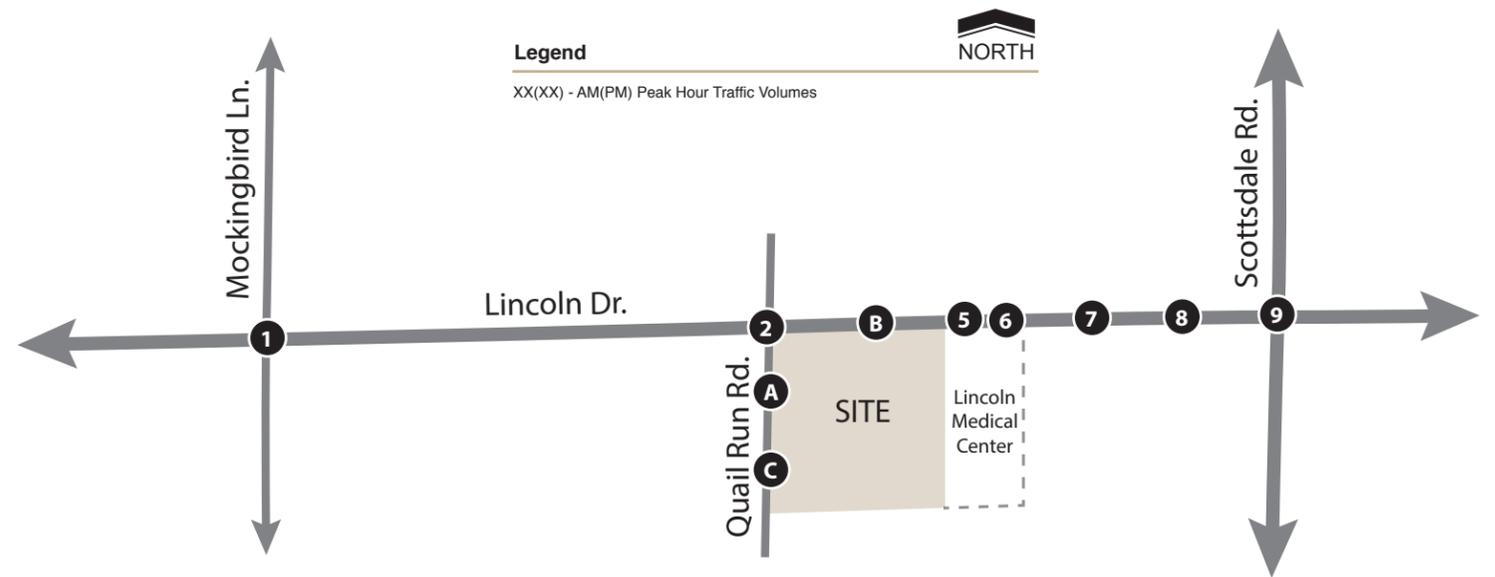
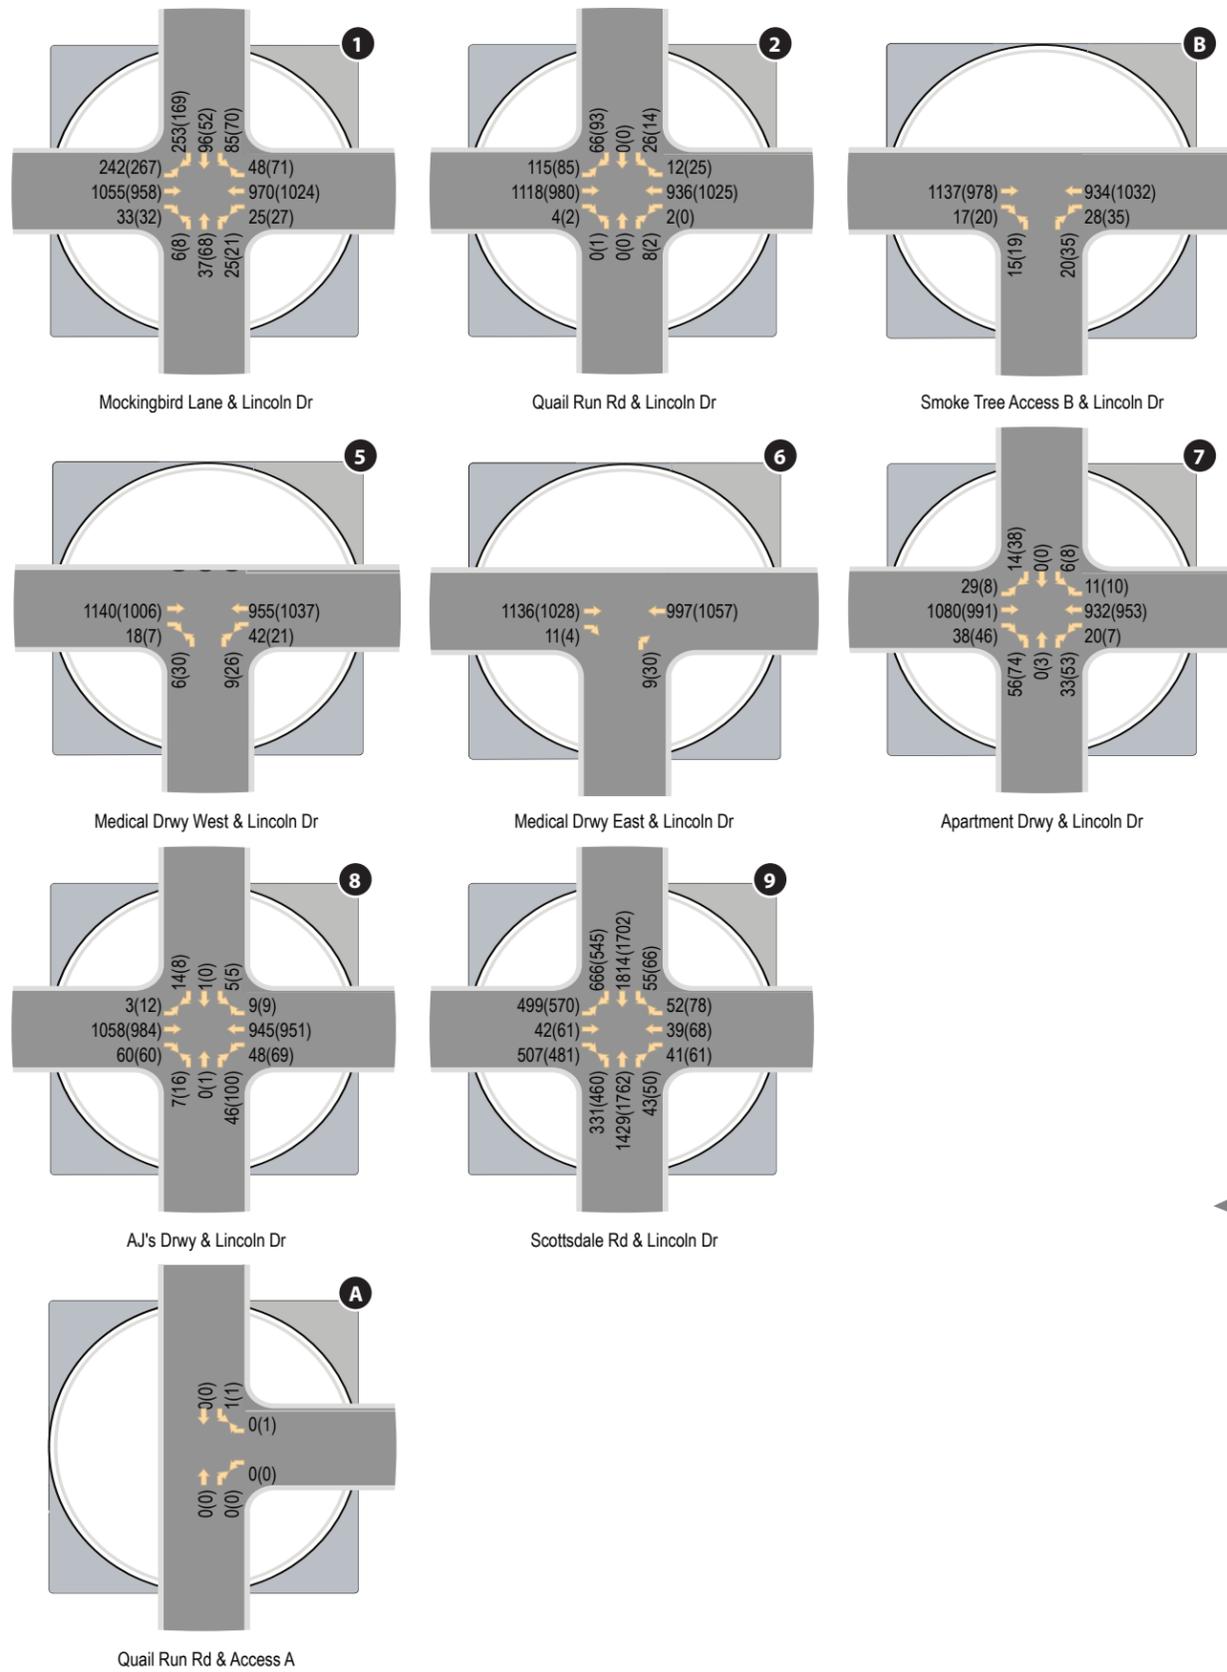


Figure 10: 2025 Total Traffic Volumes

TRAFFIC AND IMPROVEMENT ANALYSIS

INTERSECTION CAPACITY ANALYSIS

Peak hour capacity analyses have been conducted for all of the intersections within the study area. All study area intersections were analyzed using Synchro 10.0 analysis software and the methodologies previously presented. Signalized intersections were analyzed with signal timing presented by the Town of Paradise Valley and the City of Scottsdale. According to the City of Scottsdale, the intersection of Scottsdale Road & Lincoln Drive will be restriped in the future to operate with dual left turn lanes and a shared through/right turn lane. It is unknown by what year these improvements will be made, so all analysis will be conducted using the existing lane configurations. The overall intersection and approach levels of service are summarized in **Table 6** for the 2020 opening year and **Table 7** for the 2025 horizon. Detailed analysis worksheets can be found in **Appendix G** and **Appendix H**.

Table 6: 2020 Peak Hour Analysis

ID	Intersection	Intersection Control	Approach/ Movement	2020 LOS AM(PM)		
				No-Build	Build	Mitigated
1	Mockingbird Ln & Lincoln Dr	Signal	NB	D(E)	D(E)	D(D)
			SB	E(E)	E(E)	E(E)
			EB	B(A)	B(A)	B(B)
			WB	B(A)	B(A)	C(B)
			Overall	C(B)	C(B)	C(B)
2	Quail Run Rd & Lincoln Dr	Signal	NB	B(B)	B(B)	[Not Mitigated]
			SB	B(B)	B(B)	
			EB	B(A)	B(A)	
			WB	D(D)	D(D)	
			Overall	C(C)	C(C)	
3	Smoke Tree Drwy West & Lincoln Dr	1-way stop (NB)	NB Shared/Right WB Left	A(A) A(A)	-(-) -(-)	[Not Mitigated]
4	Smoke Tree Drwy East & Lincoln Dr	1-way stop (NB)	NB Shared WB Left	C(C) B(B)	-(-) -(-)	[Not Mitigated]
5	Medical Drwy West & Lincoln Dr	1-way stop (NB)	NB Shared WB Left	C(C) B(B)	C(C) B(B)	[Not Mitigated]
6	Medical Drwy East & Lincoln Dr	1-way stop (NB)	NB Shared/Right WB Left	B(B) B(A)	B(B) B(A)	[Not Mitigated]
7	Apartment Drwy & Lincoln Dr	2-way Stop (NB/SB)	NB Shared	F(F)	F(F)	[Not Mitigated]
			SB Left	F(F)	F(F)	
			SB Right	B(B)	B(B)	
			EB Left	B(B)	B(B)	
			WB Left	B(B)	B(B)	
8	AJ's Drwy & Lincoln Dr	2-way Stop (NB/SB)	NB Shared	C(D)	C(E)	[Not Mitigated]
			SB Left	F(F)	F(F)	
			SB Right	B(B)	B(B)	
			EB Left	B(B)	B(B)	
			WB Left	B(B)	B(B)	
9	Scottsdale Rd & Lincoln Dr	Signal	NB	C(C)	C(C)	D(D)
			SB	D(D)	D(D)	E(E)
			EB	F(E)	F(E)	E(E)
			WB	E(F)	E(F)	E(E)
			Overall	D(D)	D(D)	E(D)
A	Quail Run Rd & Access A	1-way stop (WB)	SB Left WB Right	-(-) -(-)	A(A) A(A)	[Not Mitigated]

ID	Intersection	Intersection Control	Approach/Movement	2020 LOS AM(PM)		
				No-Build	Build	Mitigated
B	Smoke Tree Access B & Lincoln Dr	1-way stop (NB)	NB Shared WB Left	-(-) -(-)	C(C) B(B)	[Not Mitigated]

The results of the 2020 opening year Synchro analysis summarized in **Table 6** indicates that all study intersections are anticipated to experience an acceptable level of service, with the exception of the following intersections:

The intersection of **Mockingbird Lane & Lincoln Drive** is expected to experience delay on the northbound and southbound approaches during the no build and the full build scenario. By increasing the southbound left turn phase from 9 seconds to 19 seconds and changing the northbound left turn phase from permissive to permissive-protected, the southbound approach delay is expected to decrease from 56 seconds per vehicle to 55.1 seconds per vehicle during the AM peak hour and decrease from 58.7 seconds per vehicle to 55.4 seconds per vehicle during the PM peak hour. The northbound approach delay is expected to decrease from 48 seconds per vehicle to 43.3 seconds per vehicle during the AM peak hour and decrease from 58.7 seconds per vehicle to 57.3 seconds per vehicle in the PM peak hour, which is very close to what is considered an acceptable level of service.

The intersections of **Apartment Driveway & Lincoln Drive** and **AJ's Driveway & Lincoln Drive** experience delays in the northbound left turn approach and southbound left turn. Both of these approaches and driveways are driveways for AJ's Fine Foods and the existing Lincoln Apartments. The addition of Smoke Tree Resort is not the cause of these delays, which remains consistent with the existing condition.

The intersection of **Scottsdale Road & Lincoln Drive** is expected to experience delay on the eastbound and westbound approaches during both the AM and PM peak hours for both the no build and full build scenarios. The intersection is expected to operate at an overall acceptable level of service (LOS D or better) during both the AM and PM peak hours of both scenarios, however, the eastbound and westbound approach delay could be improved by increasing the eastbound phase from 30 seconds to 32 seconds and increasing the westbound phase from 13 seconds to 21 seconds. This change is expected to decrease the overall intersection delay from 46.4 seconds per vehicle to 25 seconds per vehicle in the AM peak and increase the overall intersection delay from 44.9 seconds per vehicle to 52.1 seconds per vehicle in the PM peak hour. Although the PM peak hour overall intersection delay is expected to increase, the individual approach delays for the eastbound and westbound decrease significantly. The eastbound approach is expected to decrease from 82.8 seconds per vehicle to 16 seconds per vehicle and the westbound approach is expected to decrease from 63.8 seconds per vehicle to 23.7 seconds per vehicle during the PM peak hour.

The intersection of **Quail Run Road and Access A** reports a delay of zero seconds using the HCM 6th edition methodology. No LOS is reported in the included appendices, however zero seconds of delay would yield an LOS of A, shown in the table.

The signal timing proposed for the 2020 mitigated scenario was applied to the 2025 horizon year.

Table 7: 2025 Peak Hour Analysis

ID	Intersection	Intersection Control	Approach/Movement	2025 LOS AM(PM)		
				No-Build	Build	Mitigated
1	Mockingbird Ln & Lincoln Dr	Signal	NB	D(E)	D(D)	[Not Mitigated]
			SB	E(E)	E(E)	
			EB	B(A)	C(B)	
			WB	C(B)	D(C)	
			Overall	C(B)	C(C)	
2	Quail Run Rd & Lincoln Dr	Signal	NB	B(B)	B(B)	[Not Mitigated]
			SB	B(C)	B(B)	
			EB	A(A)	B(A)	
			WB	D(D)	D(C)	
			Overall	C(C)	C(B)	
3	Smoke Tree Drwy West & Lincoln Dr	1-way stop (NB)	NB Shared/Right	A(A)	-(-)	[Not Mitigated]
			WB Left	A(A)	-(-)	
4	Smoke Tree Drwy East & Lincoln Dr	1-way stop (NB)	NB Shared	C(C)	-(-)	[Not Mitigated]
			WB Left	B(B)	-(-)	
5	Medical Drwy West & Lincoln Dr	1-way stop (NB)	NB Shared	C(C)	C(C)	[Not Mitigated]
			WB Left	B(B)	B(B)	
6	Medical Drwy East & Lincoln Dr	1-way stop (NB)	NB Shared/Right	B(B)	B(B)	[Not Mitigated]
			WB Left	B(A)	B(A)	
7	Apartment Drwy & Lincoln Dr	2-way Stop (NB/SB)	NB Shared	F(F)	F(F)	[Not Mitigated]
			SB Left	F(F)	F(F)	
			SB Right	B(B)	B(B)	
			EB Left	B(B)	B(B)	
			WB Left	B(B)	B(B)	
8	AJ's Drwy & Lincoln Dr	2-way Stop (NB/SB)	NB Shared	D(F)	D(F)	[Not Mitigated]
			SB Left	F(F)	F(F)	
			SB Right	B(B)	B(B)	
			EB Left	B(B)	B(B)	
			WB Left	B(B)	B(B)	
9	Scottsdale Rd & Lincoln Dr	Signal	NB	C(D)	D(D)	D(E)
			SB	D(D)	F(E)	E(D)
			EB	F(F)	F(E)	E(E)
			WB	E(F)	E(E)	E(E)
			Overall	D(D)	E(E)	E(E)
A	Quail Run Rd & Access A	1-way stop (WB)	SB Left	-(-)	A(A)	[Not Mitigated]
			WB Right	-(-)	A(A)	
B	Smoke Tree Access B & Lincoln Dr	1-way stop (NB)	NB Shared	-(-)	C(C)	[Not Mitigated]
			WB Left	-(-)	B(B)	

The results of the 2025 horizon year Synchro analysis summarized in **Table 7** indicates that all study intersections are anticipated to experience an acceptable level of service, with the exception of the following intersections:


The intersection of **Mockingbird Lane & Lincoln Drive** is expected to have delay on the southbound approach during the AM and PM peak hours of both the no build and full build scenario. The delay is due to the volume of southbound right turning vehicles, however the approach delay is 55.4 seconds per vehicle during the AM peak hour of the full build scenario and 56.2 seconds per vehicle during the PM peak hour, which is lower than the no build scenario and very close to the threshold for an acceptable level of service (LOS D or better).

The intersections of **Apartment Driveway & Lincoln Drive** and **AJ's Driveway & Lincoln Drive** experience delays in the northbound left turn approach and southbound left turn. Both of these approaches and driveways are driveways for AJ's Fine Foods and the existing Lincoln Apartments. The addition of Smoke Tree Resort is not the cause of these delays, which remains consistent with the existing condition.

The intersection of **Scottsdale Road & Lincoln Drive** is expected to experience delay on the southbound, eastbound and westbound approaches during both the AM and PM peak hours for both the no build and full build scenarios. By decreasing the cycle length from 130 seconds to 120 seconds and optimizing the green times, the overall intersection delay is expected to decrease from 76 seconds per vehicle to 58.2 seconds per vehicle during the AM peak hour and decrease from 62.7 seconds per vehicle to 57.7 seconds per vehicle during the PM peak hour. Although this mitigation measure is expected to decrease the approach delays and the overall intersection delay, if this signal is coordinated with any others along Scottsdale Road, changing the cycle length will interfere with the coordination and would not be recommended. The City of Scottsdale has stated that they have plans to change the eastbound approach configuration to dual left turn lanes and a shared through/right turn lane. It is not known when this change will occur, but it could improve the delay if the intersection is retimed.

The intersection of **Quail Run Road and Access A** reports a delay of zero seconds using the HCM 6th edition methodology. No LOS is reported in the included appendices, however zero seconds of delay would yield an LOS of A, shown in the table.

The proposed lane configurations are presented in **Figure 11**.

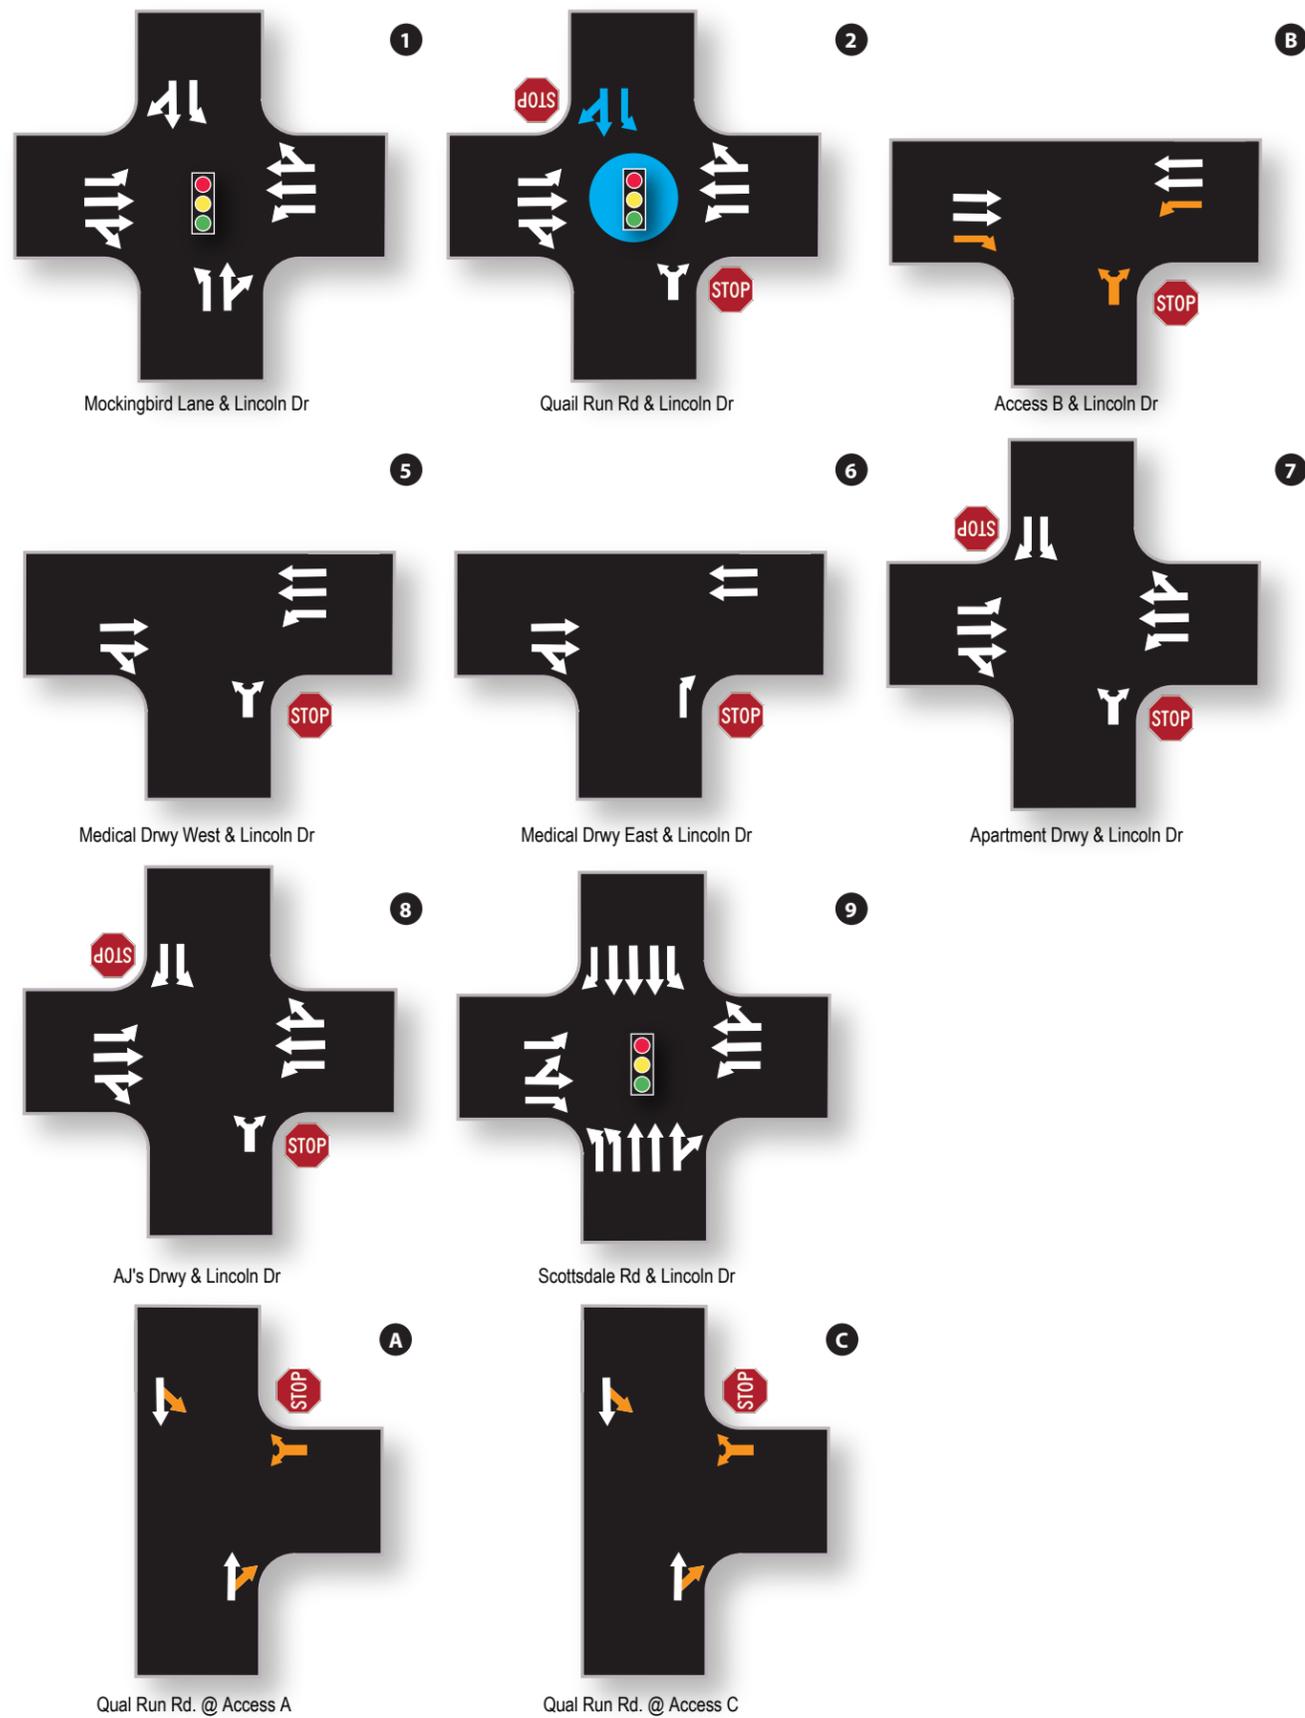

Thru or Turning Movement	NORTH
Traffic Signal	Stop Sign
Improvements by Ritz Carlton	
Improvements by Developer	

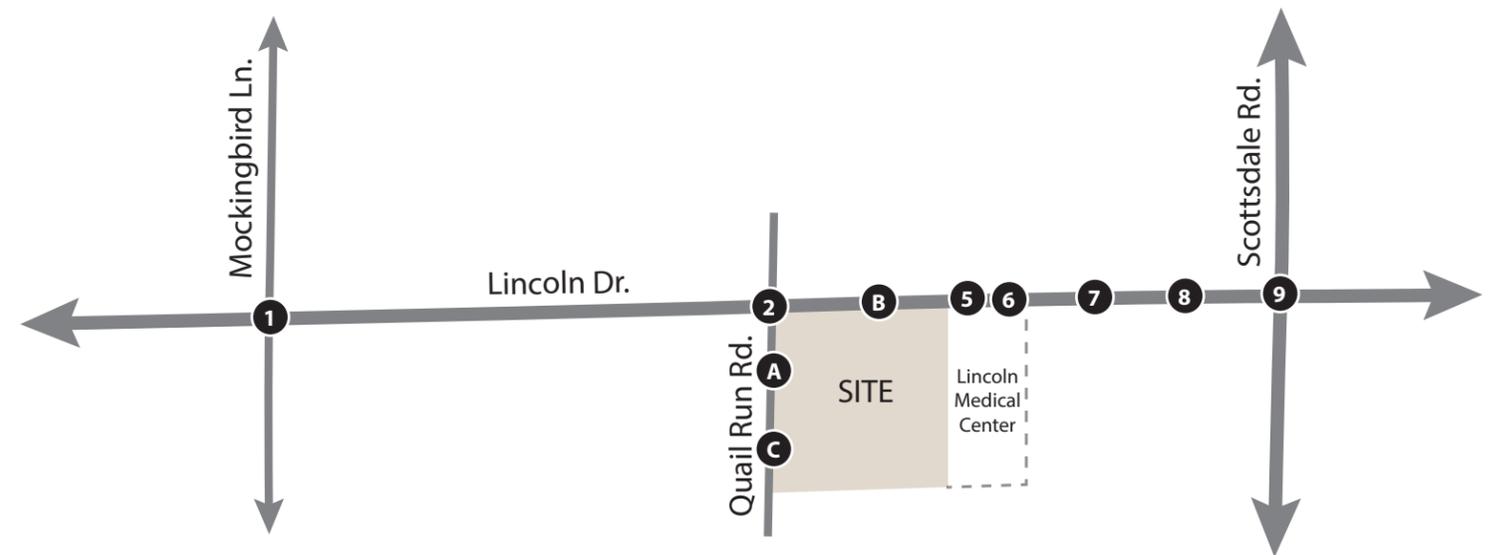


Figure 11: Proposed Lane Configurations and Traffic Controls

QUEUE LENGTH ANALYSIS

Adequate turn storage should be supplied on any approach where turn lanes are permitted and/or warranted. A queuing analysis was performed for all warranted/recommended and existing intersection turn lanes where site traffic is expected as well as left turn lanes adjacent to the site. According to the methodology documented in *A Policy on Geometric Design of Highways and Streets* (the AASHTO “Green Book”), the storage length for a turn lane is typically estimated as the length required to hold the average number of arriving vehicles per two minutes, where unsignalized, or per one-and-a half signal cycles, where signalized.¹ The formulas used for the calculations are shown below.

For signalized intersections, the storage length is determined by the following formula:

$$\text{Storage Length} = [1.5 \times (\text{veh/hr})/(\text{cycles/hr})] \times 25 \text{ feet}$$

For unsignalized intersections, the storage length is determined by the following formula:

$$\text{Storage Length} = [(\text{veh/hr})/(30 \text{ periods/hr})] \times 25 \text{ feet}$$

Using the traffic volumes and lane configurations projected for the 2025 horizon year, the resulting turn lane storage for turn movements affiliated with the site using AASHTO guidelines were calculated with a 130-second cycle length and are summarized in **Table 8**. Calculations for the queue storage length recommendations are provided in **Appendix I**.

Table 8: Queue Storage Lengths

ID	Intersection	Intersection Control	Movement	Queue Storage			
				Existing ⁽¹⁾	AASHTO	95 th Percentile	Recommended
1	Mockingbird Lane & Lincoln Dr	Signalized	NB Left	85'	25'	25'	85'
			SB Left	130'	175'	95'	130'
			EB Left	145'	500'	235'	⁽⁴⁾ 145'
			WB Left	100'	50'	30'	100'
2	Quail Run Rd & Lincoln Dr	Signalized	EB Left	-	225'	155'	150'
			WB Left	-	25'	25'	150'
			WB Right	-	50'	-	150'
9	Scottsdale Rd & Lincoln Dr	Signalized	NB Left	⁽²⁾ 550'	⁽²⁾ 850'	⁽²⁾ 345'	⁽²⁾ 550'
			SB Left	185'	125'	120'	185'
			EB Left	175'	1,050'	500'	⁽⁴⁾ 175'
			WB Left	90'	125'	100'	⁽⁵⁾ 90'
			SB Right	315'	1,225'	275'	⁽³⁾ 350'
			EB Right	175'	925'	350'	⁽⁴⁾ 175'
B	Smoke Tree Access B & Lincoln Dr	1-way stop (NB)	WB Left	-	50'	25'	50'
			EB Right	-	25'	-	50'

(1) Measured from stop bar to end of storage length

(2) Dual left turn lanes. Queue storage includes total storage length of both lanes

(3) Max storage length recommended for signalized intersection

¹ The American Association of Highway and Transportation Officials on pages 714-715 of its publication, *Geometric Design of Highways and Streets* (“AASHTO Green Book”), indicates that storage length for a turn lane, exclusive of taper, “should usually be based on one and one-half to two times the average number of vehicles that would store per cycle” at a signalized intersection.

- (4) Extending this turn will interfere with left turns into AJ's Fine Foods driveway
- (5) Not the responsibility of the developer

According to the CivTech study done for the Ritz Carlton, the newly signalized intersection of Quail Run Road and Lincoln Drive will have eastbound/westbound left turn lanes and a westbound right turn lane striped with 150 feet of storage each. The recommended storage lengths in **Table 8** are provided for horizon year 2025 using the total traffic projections.

The Smoke Tree Resort is requesting a new full access driveway located approximately 80 feet west of the eastern most property line. The Town of Paradise Valley has stated that an eastbound right turn deceleration lane is required at this driveway. Using AASHTO methodology only 25 feet of storage is required, however, 50 feet is the minimum that should be recommended per AASHTO standards with a 90 foot taper. A minimum of 75 feet of storage is recommended for the right turn deceleration lane, however, if interference with other turn lanes is expected with the 75 foot storage length, 50 feet would be an acceptable storage length.

SIGHT DISTANCE ANALYSIS

Adequate sight distance must be provided at intersections and site access driveways to allow safe turning movements. There must be sufficient unobstructed sight distance along both approaches of a street/driveway intersection and across their included corners to allow operators of vehicles to see each other in time to prevent a collision.

The Town of Paradise Valley maintains sight distance requirements within their City Code, standard details and development services guidelines. The Town of Paradise Valley measures sight distance using AASHTO methodology except that the sight triangle from the driveway is measured from the center of the egress lane, 14.5 feet back from the curb return line. Sight distance calculations according to AASHTO guidelines are summarized in **Table 9**.

Table 9: AASHTO Sight Distance Requirements

Roadway	Posted Speed Limit (mph)	Design Speed (mph)	Sight Distance Along Roadway		
			Left of Driveway (Case B2/B3)	Right of Driveway (Case B1)	On Major Road (Case F)
Quail Run Rd & Access A	-	30	290'	335'	245'
Smoke Tree Access B & Lincoln Dr	40	45	860'	930'	795'
Quail Run Rd & Access C	-	30	290'	335'	245'

There are no existing obstructions to sight distance within the project intersection or along the included corners of the proposed intersection. Adequate site distance must be provided at the intersections to allow safe left and right turning movements from the development. Recommended distances for these movements can be found in the table above.

The contractor should ensure that sight visibility is provided at all proposed intersections according to the distances shown in **Table 9** and that sight triangles at public

intersections are maintained according to the Town Code. All vegetation and trees should be maintained according to Town of Paradise Valley regulations. Sight distance worksheets have been included within **Appendix J**.

CONCLUSIONS

The following conclusions have been documented in this study.

General

- The proposed development is anticipated to generate approximately 1,032 weekday daily trips, with 69 trips occurring in the AM peak hour and 101 trips occurring in the PM peak hour.

Existing Conditions

- The results of the existing conditions analysis indicates that all intersections currently operate at an overall acceptable level of service (LOS D or better), with the exception of the intersections of Apartment Driveway & Lincoln Drive and AJ's Driveway & Lincoln Drive under the existing lane configurations.
 - The intersections of **Apartment Driveway & Lincoln Drive and AJ's Driveway & Lincoln Drive** experience delays in the northbound left turn approach and southbound left turn. Both of these approaches and driveways are driveways for AJ's Fine Foods and existing Apartments. It is possible that a raised median will be installed along the length of Lincoln Drive.

Opening Year 2020

- The results of the 2020 opening year Synchro analysis indicates that all study intersections are anticipated to experience an acceptable level of service, with the exception of the following intersections:
 - The intersection of **Mockingbird Lane & Lincoln Drive** is expected to experience delay on the northbound and southbound approaches during the no build and the full build scenario. By increasing the southbound left turn phase from 9 seconds to 19 seconds and changing the northbound left turn phase from permissive to permissive-protected, the southbound approach delay is expected to decrease from 56 seconds per vehicle to 55.1 seconds per vehicle during the AM peak hour and decrease from 58.7 seconds per vehicle to 55.4 seconds per vehicle during the PM peak hour. The northbound approach delay is expected to decrease from 48 seconds per vehicle to 43.3 seconds per vehicle during the AM peak hour and decrease from 58.7 seconds per vehicle to 57.3 seconds per vehicle in the PM peak hour, which is very close to what is considered an acceptable level of service.
 - The intersections of **Apartment Driveway & Lincoln Drive and AJ's Driveway & Lincoln Drive** experience delays in the northbound left turn approach and southbound left turn. Both of these approaches and driveways are driveways for AJ's Fine Foods and the existing Lincoln Apartments. The addition of Smoke Tree Resort is not the cause of these delays, which remains consistent with the existing condition.

- The intersection of **Scottsdale Road & Lincoln Drive** is expected to experience delay on the eastbound and westbound approaches during both the AM and PM peak hours for both the no build and full build scenarios. The intersection is expected to operate at an overall acceptable level of service (LOS D or better) during both the AM and PM peak hours of both scenarios, however, the eastbound and westbound approach delay could be improved by increasing the eastbound phase from 30 seconds to 32 seconds and increasing the westbound phase from 13 seconds to 21 seconds. This change is expected to decrease the overall intersection delay from 46.4 seconds per vehicle to 25 seconds per vehicle in the AM peak and increase the overall intersection delay from 44.9 seconds per vehicle to 52.1 seconds per vehicle in the PM peak hour. Although the PM peak hour overall intersection delay is expected to increase, the individual approach delays for the eastbound and westbound decrease significantly. The eastbound approach is expected to decrease from 82.8 seconds per vehicle to 16 seconds per vehicle and the westbound approach is expected to decrease from 63.8 seconds per vehicle to 23.7 seconds per vehicle during the PM peak hour.
- The intersection of **Quail Run Road and Access A** reports a delay of zero seconds using the HCM 6th edition methodology. No LOS is reported in the included appendices, however zero seconds of delay would yield an LOS of A, shown in the table.

Horizon year 2025

- The results of the 2025 horizon year Synchro analysis summarized in **Table 7** indicates that all study intersections are anticipated to experience an acceptable level of service, with the exception of the following intersections:
 - The intersections of **Apartment Driveway & Lincoln Drive** and **AJ's Driveway & Lincoln Drive** experience delays in the northbound left turn approach and southbound left turn. Both of these approaches and driveways are driveways for AJ's Fine Foods and the existing Lincoln Apartments. The addition of Smoke Tree Resort is not the cause of these delays, which remains consistent with the existing condition.
 - The intersection of **Scottsdale Road & Lincoln Drive** is expected to experience delay on the southbound, eastbound and westbound approaches during both the AM and PM peak hours for both the no build and full build scenarios. By decreasing the cycle length from 130 seconds to 120 seconds and optimizing the green times, the overall intersection delay is expected to decrease from 76 seconds per vehicle to 58.2 seconds per vehicle during the AM peak hour and decrease from 62.7 seconds per vehicle to 57.7 seconds per vehicle during the PM peak hour. Although this mitigation measure is expected to decrease the approach delays and the overall intersection delay, if this signal is coordinated with any others along Scottsdale Road, changing the cycle length will interfere with the coordination and would not be recommended. The City of

Scottsdale has stated that they have plans to change the eastbound approach configuration to dual left turn lanes and a shared through/right turn lane. It is not known when this change will occur, but it could improve the delay if the intersection is retimed.

- The intersection of **Quail Run Road and Access A** reports a delay of zero seconds using the HCM 6th edition methodology. No LOS is reported in the included appendices, however zero seconds of delay would yield an LOS of A, shown in the table.

Queue Storage and Sight Distance

- According to the CivTech study done for the Ritz Carlton, the newly signalized intersection of Quail Run Road and Lincoln Drive will have eastbound/westbound left turn lanes and a westbound right turn lane striped with 150 feet of storage each. While 150 feet is being proposed due to the current development agreement with Five Star Development for the Ritz Carlton, less is required to meet the recommended AASHTO length. The recommended storage lengths are provided for horizon year 2025 using the total traffic projections.
 - The Smoke Tree Resort is requesting a new full access driveway located approximately 80 feet west of the eastern most property line. The Town of Paradise Valley has stated that an eastbound right turn deceleration lane is required at this driveway. Using AASHTO methodology only 25 feet of storage is required, however, 50 feet is the minimum that should be recommended per AASHTO standards with a 90 foot taper.
- There are no existing obstructions to sight distance within the project intersections or along the included corners of the proposed intersection. Adequate site distance must be provided at the intersections to allow safe left and right turning movements from the development
 - The contractor should ensure that sight visibility is provided at all proposed intersections according to the distances and that sight triangles at public intersections are maintained according to the Town Code. All vegetation and trees should be maintained according to Town of Paradise Valley regulations.

LIST OF REFERENCES

Highway Capacity Manual. Transportation Research Board, Washington, D.C., 2000.

Manual on Uniform Traffic Control Devices. U.S. Department of Transportation, Federal Highways Administration, Washington, D.C., 2009.

Roadway Design Manual, Maricopa County Department of Transportation, Phoenix, Arizona, Revised April 2004.

Trip Generation Manual, 10th Edition, Institute of Transportation Engineers, Washington, D.C., 2016.

Trip Generation Handbook, 3rd Edition, Institute of Transportation Engineers, Washington, D.C., 2016.

Ritz Carlton Master Plan, Paradise Valley Traffic Impact Analysis (TIA), CivTech, Scottsdale, AZ, March 2016.

Lincoln Medical Center, Paradise Valley Traffic Impact Analysis (TIA), CivTech, Scottsdale, AZ, November 2018.

TECHNICAL APPENDIX

APPENDIX A:	REVIEW COMMENTS AND RESPONSES
APPENDIX B:	EXISTING TRAFFIC COUNTS
APPENDIX C:	EXISTING PEAK HOUR ANALYSIS
APPENDIX D:	TRIP GENERATION
APPENDIX E:	TRIP DISTRIBUTION
APPENDIX F:	BACKGROUND TRAFFIC
APPENDIX G:	2020 PEAK HOUR ANALYSIS
APPENDIX H:	2025 PEAK HOUR ANALYSIS
APPENDIX I:	QUEUE STORAGE ANALYSIS
APPENDIX J:	SIGHT DISTANCE ANALYSIS

APPENDIX A

REVIEW COMMENTS AND RESPONSES

**Smoke Tree Resort
2ns Submittal**

CivTech, Inc.

Review Comments & Responses

Disposition Codes: (1) Will Comply (2) Will Evaluate (3) Delete Comment (4) Defer to Consultant/Owner

Reviewer Name, Agency: **Paul Mood, Town of Paradise Valley**

Item	Review Comment	(Code) & Response
1.	Applicant shall assume staff's recommendation for access onto Lincoln Drive which includes 65 feet of right-of-way, eliminated both existing driveways and adds a right turn deceleration lane and shared use driveway with the Lincoln Medical Plaza approximately 80 feet west of the eastern property line. The TIA should be updated accordingly	(1) The analysis and report text have been updated to reflect the change in access from the two existing driveways on Lincoln Drive to a single, full movement, shared driveway with Lincoln Medical Center. However, Lincoln Medical site traffic was not added to this shared driveway, but instead kept at their two existing driveways, per the instruction of the Town of Paradise Valley.
2.	A cross access easement with the Lincoln Medical Plaza shall be required	(2) Cross access may be included in the site design, but for the purpose of this study, Lincoln Medical site generated traffic was not assumed to be using the shared access, but instead kept their two original driveways.
3.	Update existing speed limit on Lincoln Drive from 35 mph to 40 mph in existing conditions and sight distance analysis sections	(1) Speed limit for Lincoln Drive has been updated from 35 mph to 40 mph




APPENDIX B

EXISTING TRAFFIC COUNTS

Project #: 18-1263-001

TMC SUMMARY OF Mockingbird Ln. & Lincoln Dr.

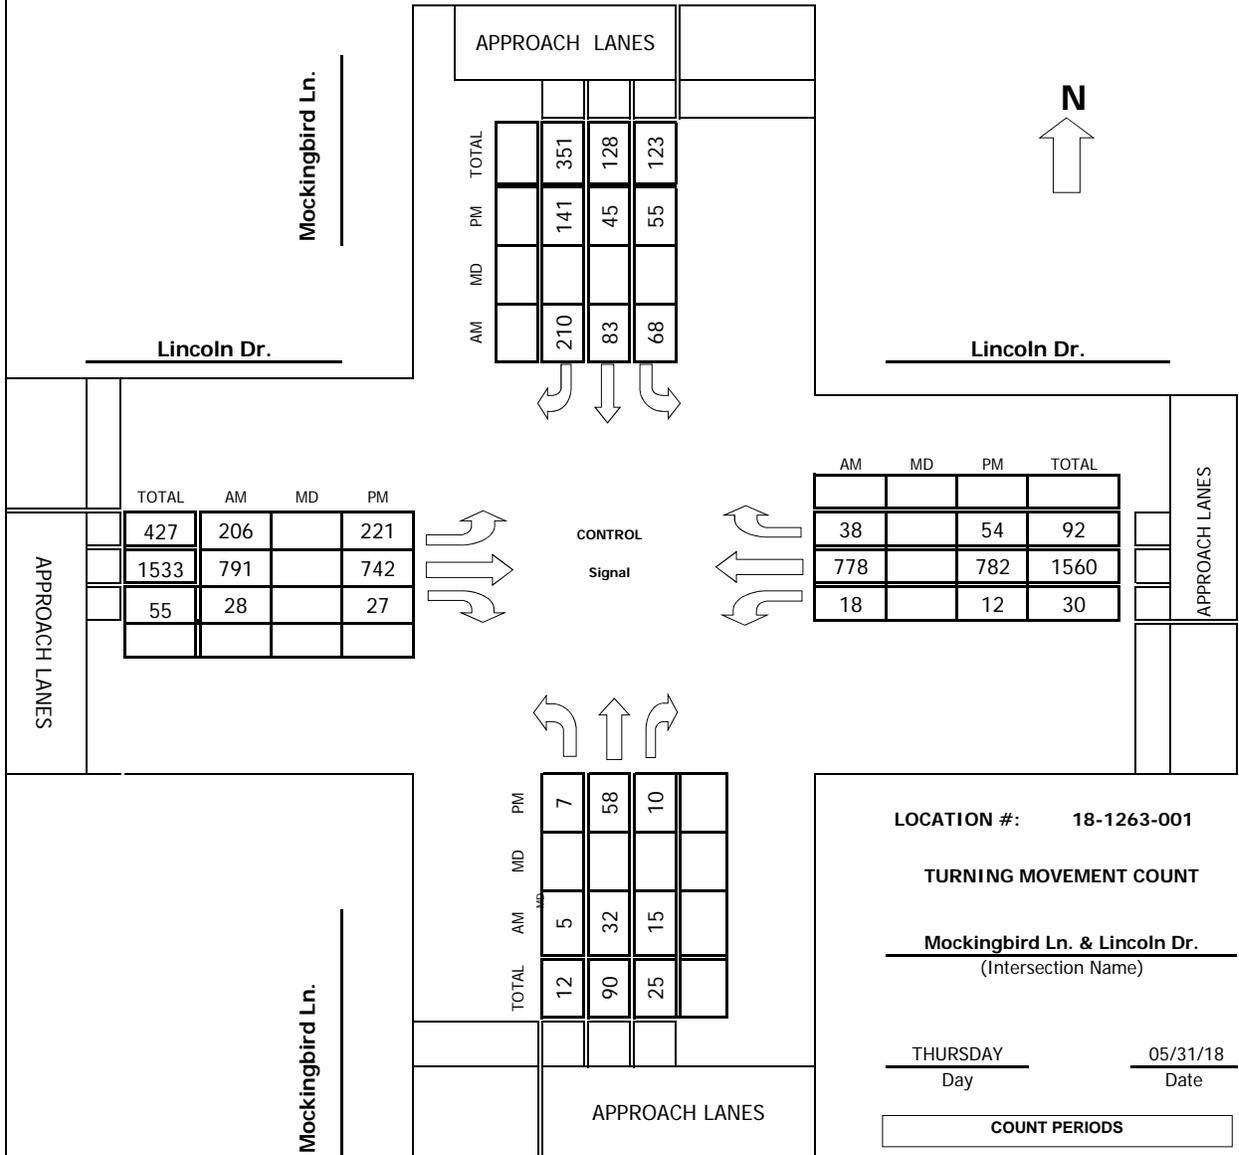

TOTAL	AM	MD	PM
427	206		221
1533	791		742
55	28		27

AM	MD	PM	TOTAL
38		54	92
778		782	1560
18		12	30

TOTAL	AM	MD	PM
12	5		7
90	32		58
25	15		10

LOCATION #: 18-1263-001

TURNING MOVEMENT COUNT

Mockingbird Ln. & Lincoln Dr.
 (Intersection Name)


THURSDAY 05/31/18
 Day Date

COUNT PERIODS		
AM	700AM	- 900AM
NOON	-	-
PM	400PM	- 600PM

AM PEAK HOUR 745 AM
 NOON PEAK HOUR _____
 PM PEAK HOUR 430 PM

Project #: 18-1263-002

TMC SUMMARY OF Quail Run Rd. & Lincoln Dr.

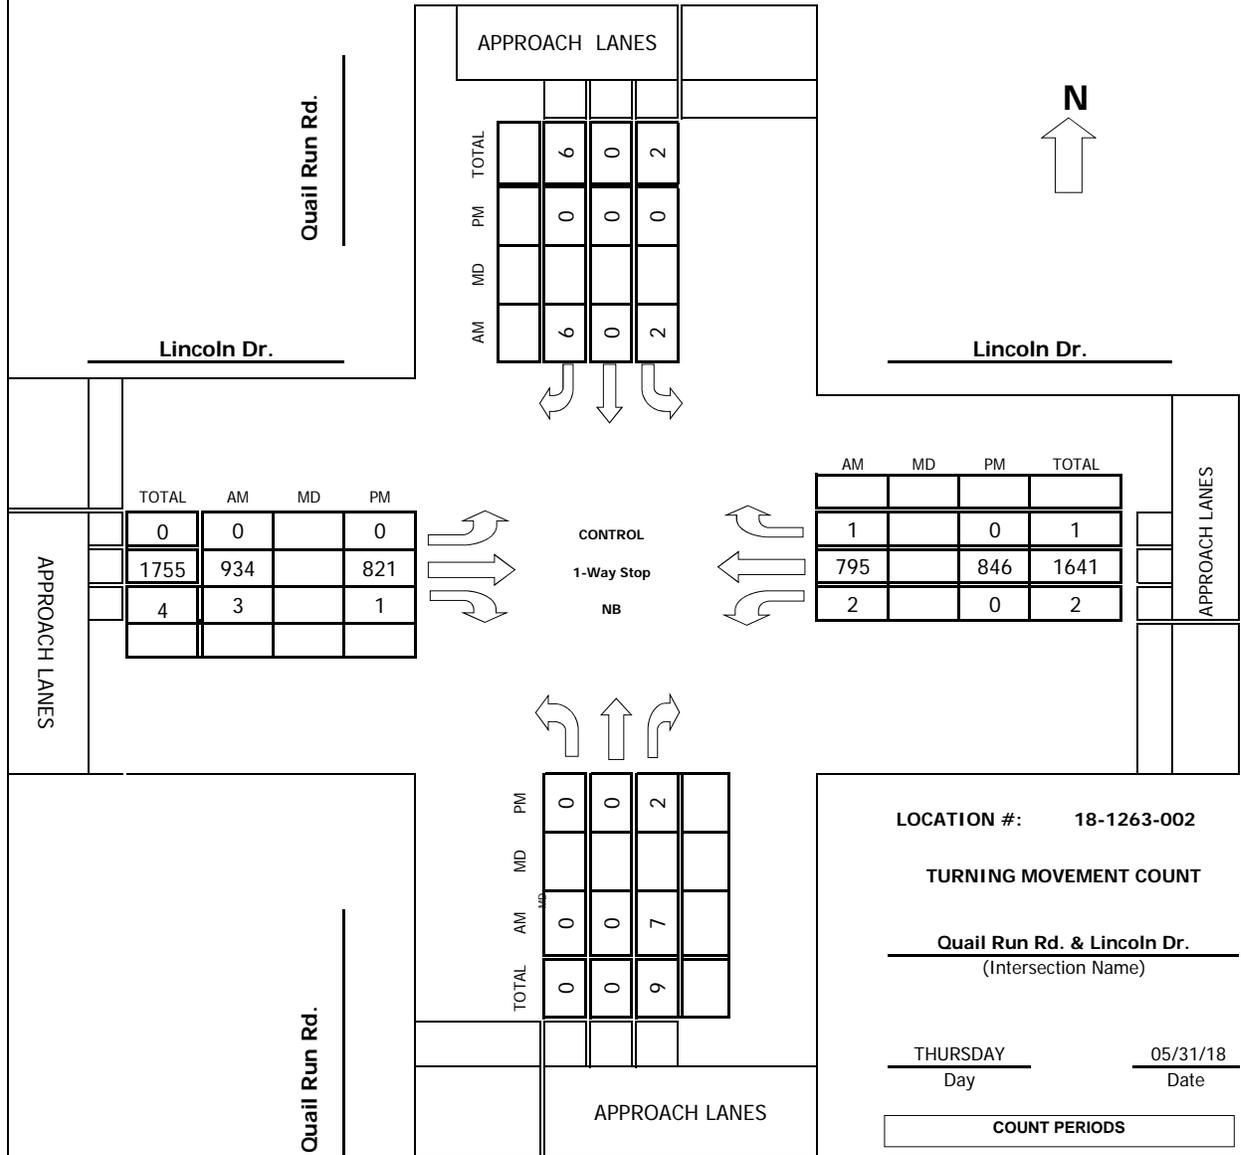

LOCATION #: 18-1263-002

TURNING MOVEMENT COUNT

Quail Run Rd. & Lincoln Dr.
(Intersection Name)


THURSDAY 05/31/18
Day Date

COUNT PERIODS	
AM	700AM - 900AM
NOON	-
PM	400PM - 600PM

AM PEAK HOUR 800 AM
 NOON PEAK HOUR _____
 PM PEAK HOUR 445 PM

Project #: 18-1263-003

TMC SUMMARY OF Smoke Tree West Dwy & Lincoln Dr.

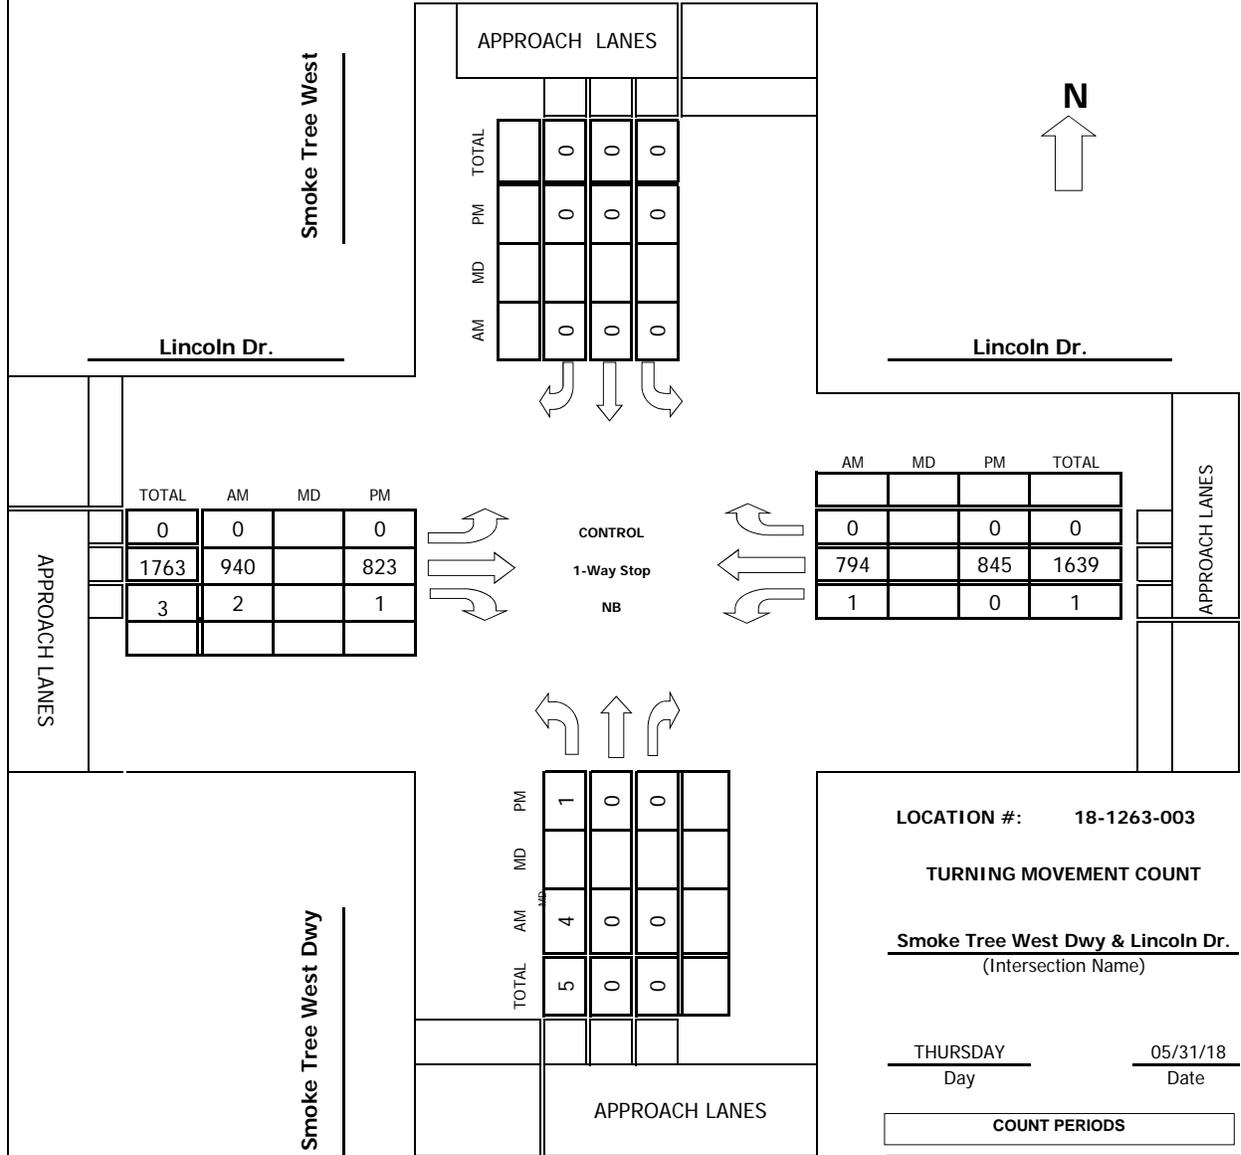

TOTAL	AM	MD	PM
0	0		0
1763	940		823
3	2		1

AM	MD	PM	TOTAL
0		0	0
794		845	1639
1		0	1

TOTAL	AM	MD	PM
5	4		1
0	0		0
0	0		0

LOCATION #: 18-1263-003

TURNING MOVEMENT COUNT

Smoke Tree West Dwy & Lincoln Dr.
(Intersection Name)

THURSDAY 05/31/18
Day Date

COUNT PERIODS	
AM	700AM - 900AM
NOON	-
PM	400PM - 600PM

AM PEAK HOUR 800 AM

NOON PEAK HOUR _____

PM PEAK HOUR 445 PM


Intersection Turning Movement

Prepared by:



Project #: 18-1263-004

TMC SUMMARY OF Smoke Tree East Dwy & Lincoln Dr.

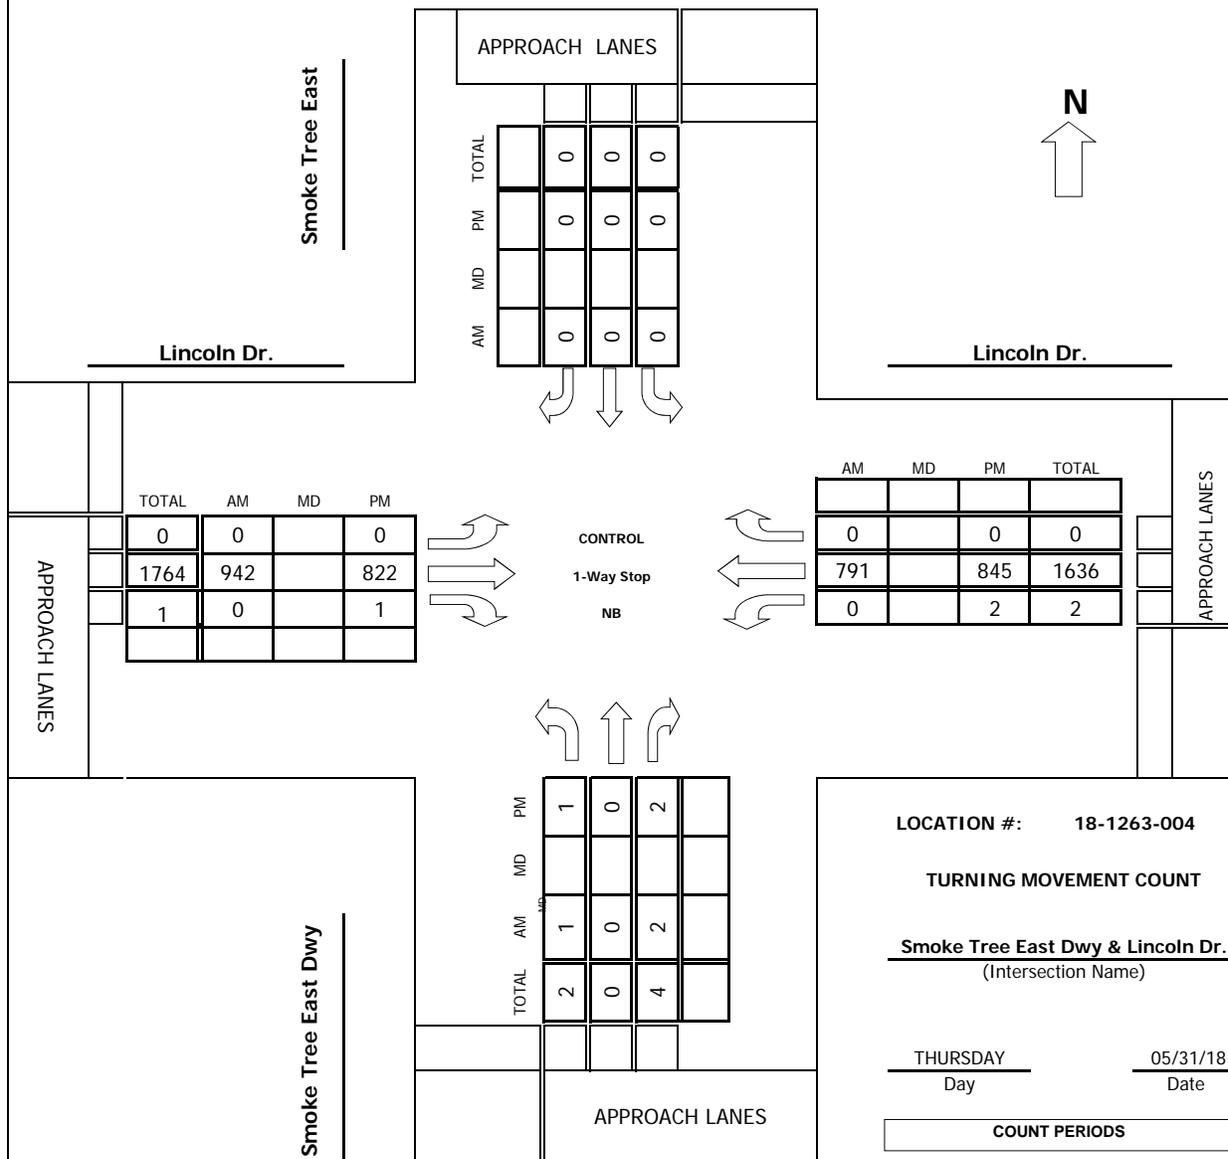

	TOTAL	AM	MD	PM
APPROACH LANES	0	0		0
	1764	942		822
	1	0		1

	AM	MD	PM	TOTAL
APPROACH LANES	0		0	0
	791		845	1636
	0		2	2

	TOTAL	AM	MD	PM
APPROACH LANES	1			
	1	0		2
	2	0		4

LOCATION #: 18-1263-004

TURNING MOVEMENT COUNT

Smoke Tree East Dwy & Lincoln Dr.
(Intersection Name)

THURSDAY 05/31/18
Day Date

COUNT PERIODS

AM	700AM	-	900AM
NOON		-	
PM	400PM	-	600PM


AM PEAK HOUR 800 AM

NOON PEAK HOUR _____

PM PEAK HOUR 445 PM

Project #: 18-1263-005

TMC SUMMARY OF Medical Office West Dwy & Lincoln Dr.

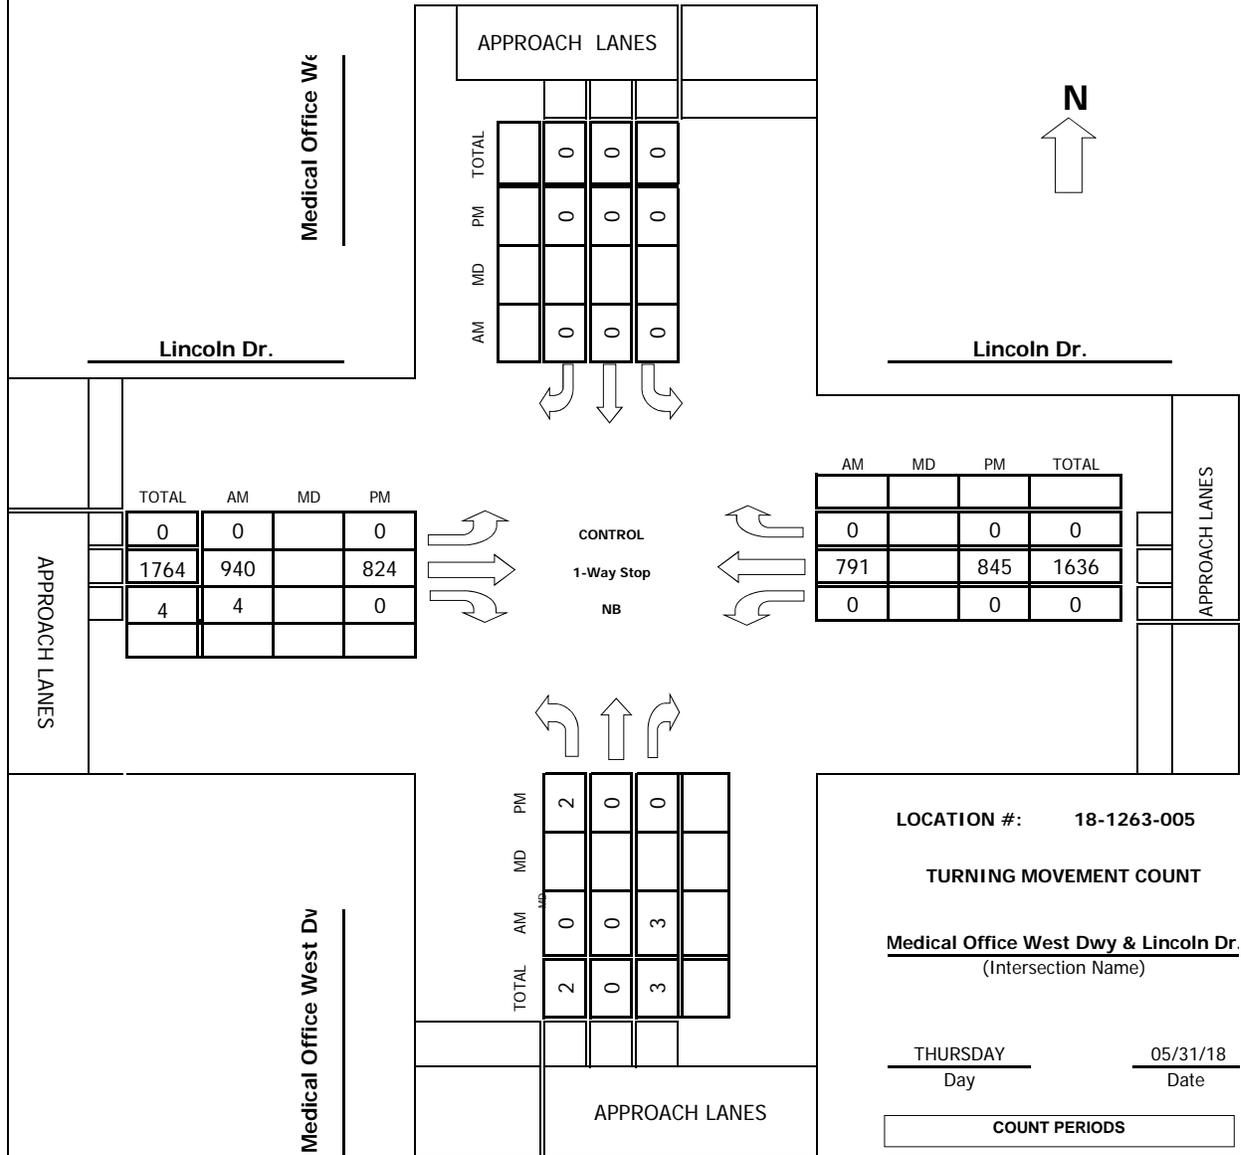

TOTAL	AM	MD	PM
0	0		0
1764	940		824
4	4		0

AM	MD	PM	TOTAL
0		0	0
791		845	1636
0		0	0

TOTAL	AM	MD	PM
2	0		2
0	0		0
3	3		0

LOCATION #: 18-1263-005

TURNING MOVEMENT COUNT

Medical Office West Dwy & Lincoln Dr.
 (Intersection Name)


THURSDAY 05/31/18
 Day Date

COUNT PERIODS		
AM	700AM	- 900AM
NOON	-	-
PM	400PM	- 600PM

AM PEAK HOUR 800 AM
 NOON PEAK HOUR _____
 PM PEAK HOUR 445 PM

Project #: 18-1263-006

TMC SUMMARY OF Medical Office East Dwy & Lincoln Dr.

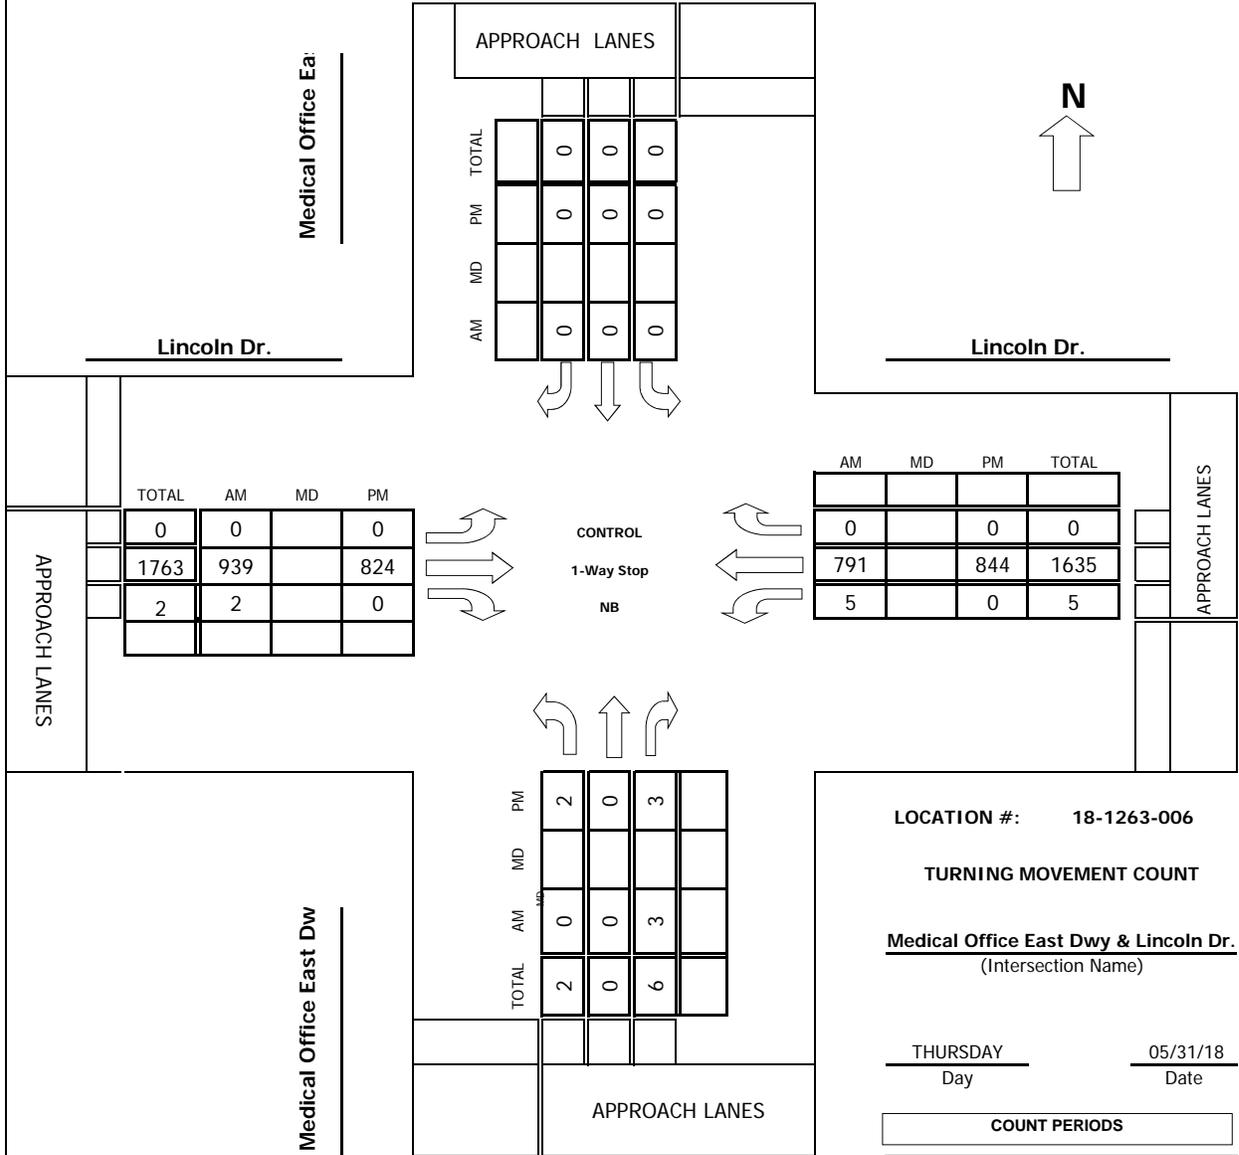

TOTAL	AM	MD	PM
0	0		0
1763	939		824
2	2		0

AM	MD	PM	TOTAL
0		0	0
791		844	1635
5		0	5

TOTAL	AM	MD	PM
2	0		2
0	0		0
6	3		3

LOCATION #: 18-1263-006

TURNING MOVEMENT COUNT

Medical Office East Dwy & Lincoln Dr.
 (Intersection Name)

THURSDAY 05/31/18
 Day Date

COUNT PERIODS	
AM	700AM - 900AM
NOON	-
PM	400PM - 600PM


AM PEAK HOUR 800 AM

NOON PEAK HOUR _____

PM PEAK HOUR 445 PM

Project #: 18-1263-007

TMC SUMMARY OF Apartment Driveway & Lincoln Dr.

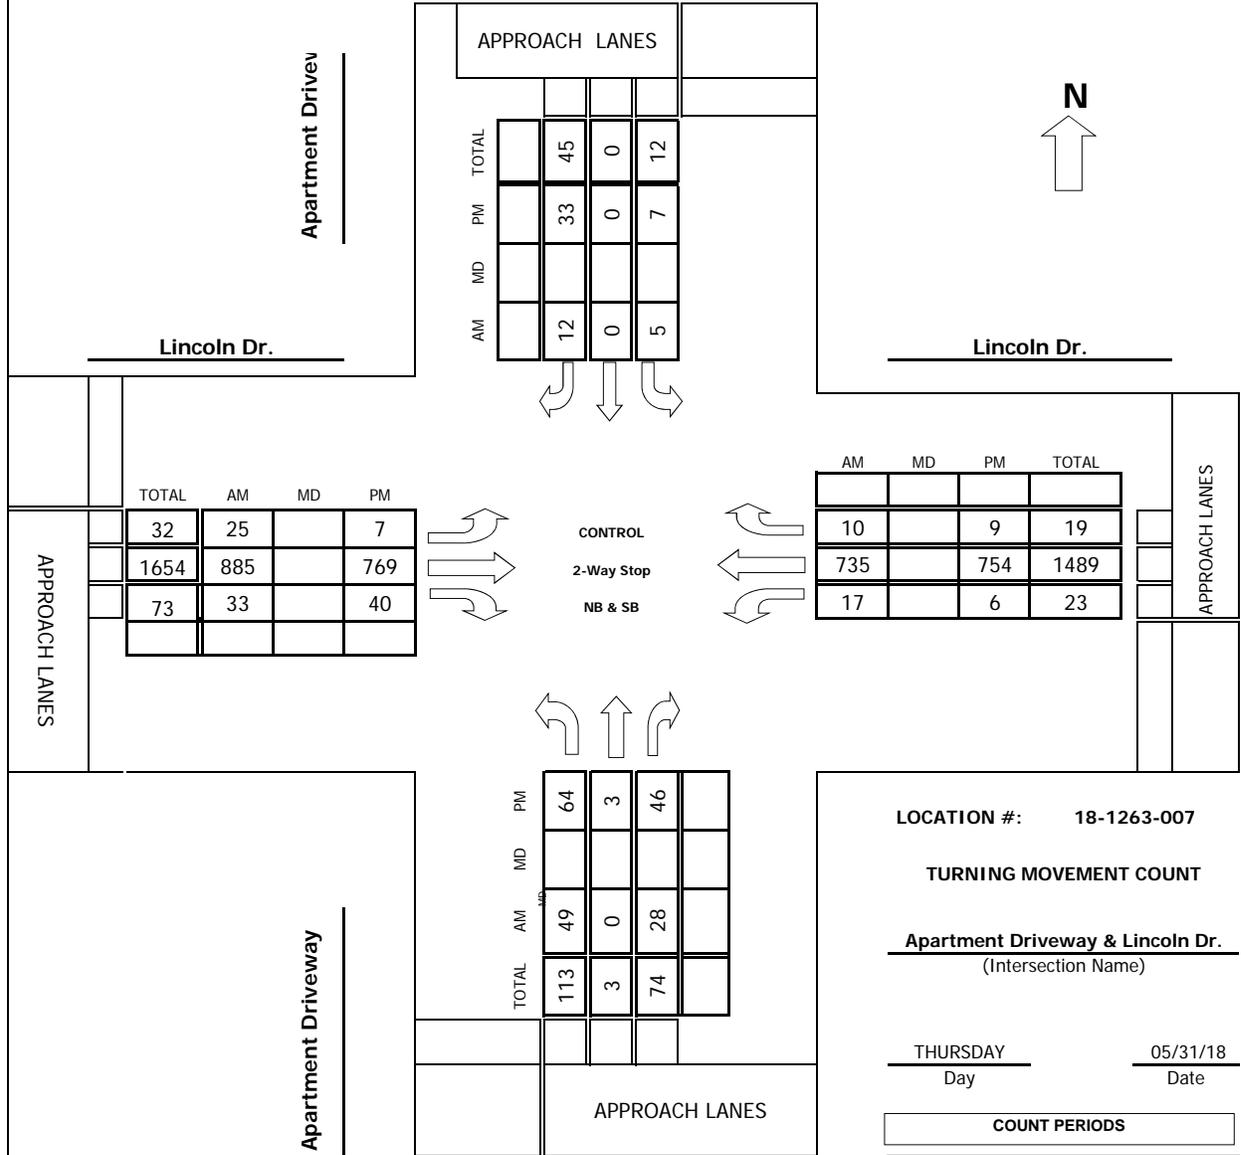

LOCATION #: 18-1263-007

TURNING MOVEMENT COUNT

Apartment Driveway & Lincoln Dr.
(Intersection Name)

THURSDAY 05/31/18
Day Date

COUNT PERIODS		
AM	700AM	900AM
NOON	-	-
PM	400PM	600PM

AM PEAK HOUR 800 AM

NOON PEAK HOUR

PM PEAK HOUR 430 PM


Intersection Turning Movement

Prepared by:



Project #: 18-1263-008

TMC SUMMARY OF AJ's Driveway & Lincoln Dr.

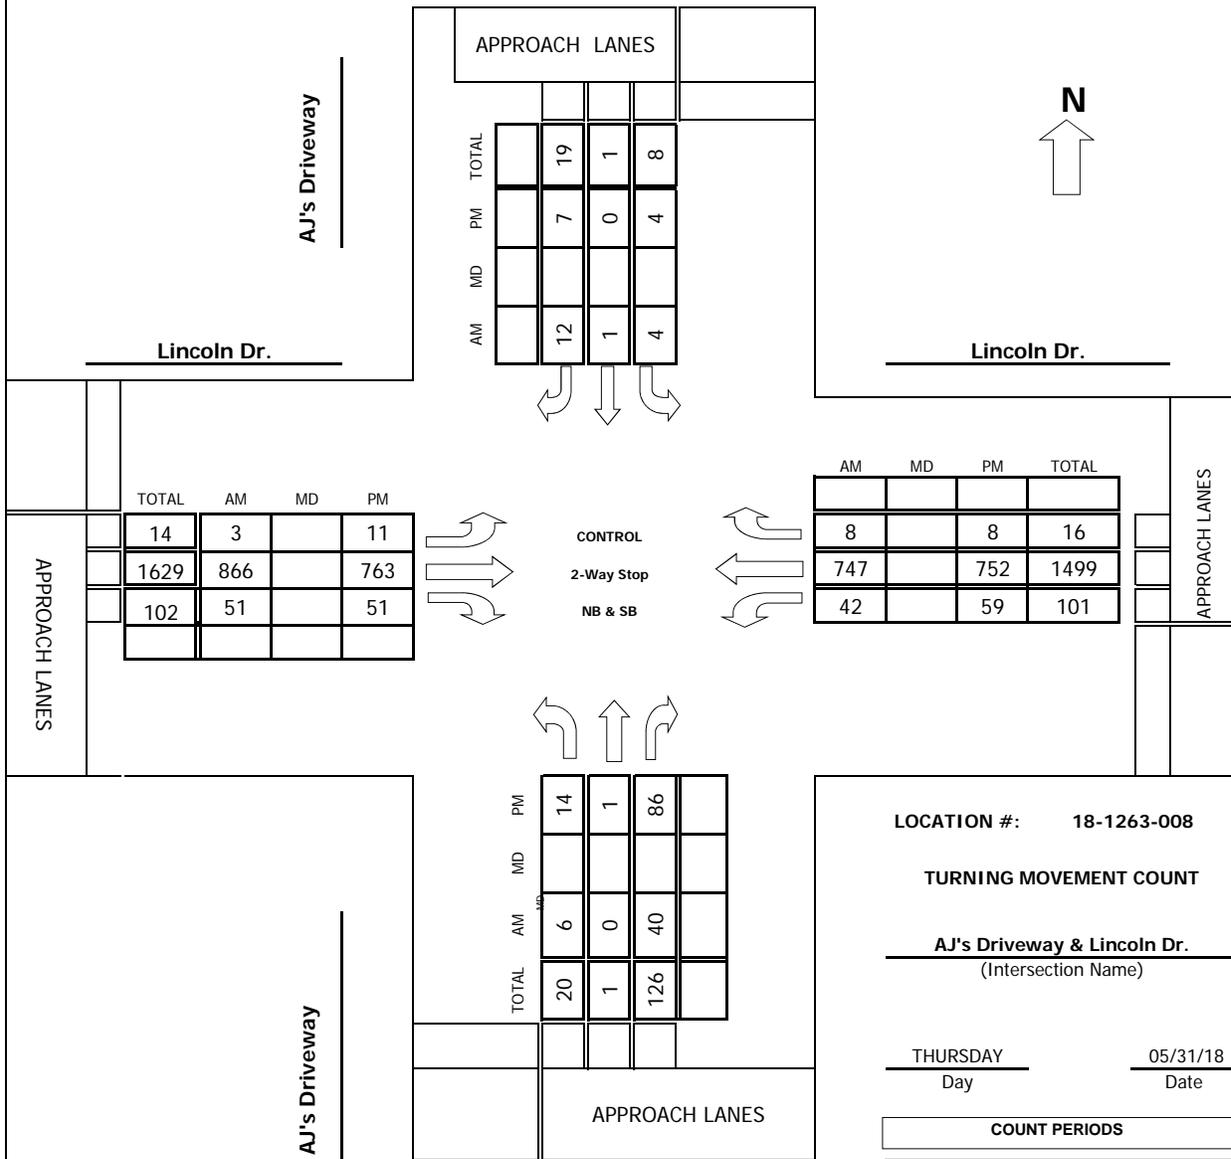

TOTAL	AM	MD	PM
14	3		11
1629	866		763
102	51		51

AM	MD	PM	TOTAL
8		8	16
747		752	1499
42		59	101

TOTAL	AM	MD	PM
20	6		14
1	0		1
126	40		86

LOCATION #: 18-1263-008

TURNING MOVEMENT COUNT

AJ's Driveway & Lincoln Dr.
(Intersection Name)

THURSDAY 05/31/18
Day Date

COUNT PERIODS		
AM	700AM	- 900AM
NOON	-	-
PM	400PM	- 600PM

AM PEAK HOUR 800 AM

NOON PEAK HOUR _____

PM PEAK HOUR 430 PM


Intersection Turning Movement

Prepared by:



Project #: 18-1263-009

TMC SUMMARY OF Scottsdale Rd. & Lincoln Dr.

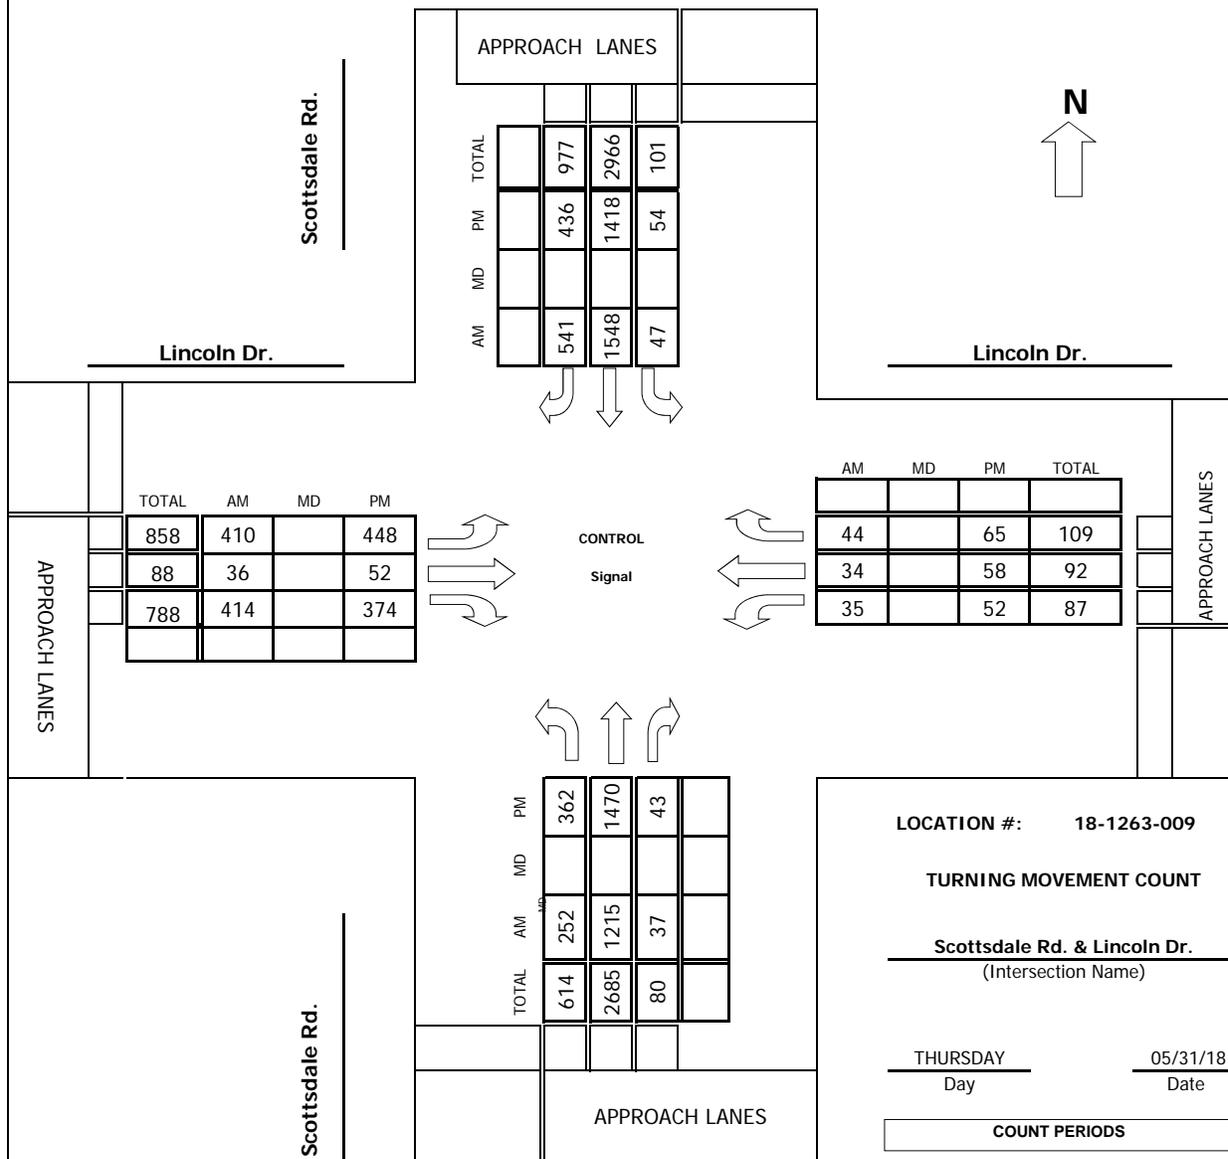

TOTAL	AM	MD	PM
858	410		448
88	36		52
788	414		374

AM	MD	PM	TOTAL
44		65	109
34		58	92
35		52	87

TOTAL	AM	MD	PM
614	252		362
2685	1215		1470
80	37		43

LOCATION #: 18-1263-009

TURNING MOVEMENT COUNT

Scottsdale Rd. & Lincoln Dr.
(Intersection Name)

THURSDAY 05/31/18
Day Date

COUNT PERIODS		
AM	700AM	- 900AM
NOON	-	-
PM	400PM	- 600PM

AM PEAK HOUR 745 AM
NOON PEAK HOUR _____
PM PEAK HOUR 430 PM


APPENDIX C

EXISTING PEAK HOUR ANALYSIS

Smoke Tree Resort
Existing AM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL
Lane Configurations	1	4	4	4	4	4	8
Traffic Volume (vph)	212	815	19	801	5	33	70
Future Volume (vph)	212	815	19	801	5	33	70
Turn Type	pm-plt	NA	Perm	NA	pm+plt	NA	NA
Protected Phases	1	6	2	2	4	4	3
Permitted Phases	6	6	2	2	4	4	8
Detector Phase	1	6	2	2	4	4	3
Switch Phase	3.5	15.0	15.0	7.0	7.0	3.5	7.0
Minimum Initial (s)	8.0	27.0	27.0	33.5	33.5	8.0	33.5
Minimum Split (s)	27.0	77.0	50.0	44.0	44.0	9.0	53.0
Total Split (%)	20.8%	59.2%	38.5%	38.5%	33.8%	6.9%	40.8%
Yellow Time (s)	3.0	4.5	4.5	4.0	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	2.5	2.5	1.0	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.5	6.5	4.0	6.5
Lead/Lag	Lead	Lag	Lag	Lag	Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	95.1	93.1	74.8	74.8	17.2	26.9	24.4
Actuated g/C Ratio	0.73	0.72	0.58	0.58	0.13	0.21	0.19
v/C Ratio	0.51	0.37	0.06	0.46	0.10	0.22	0.31
Control Delay	10.5	8.4	18.2	19.1	49.2	36.8	43.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	10.5	8.4	18.2	19.1	49.2	36.8	43.6
LOS	B	A	B	D	D	D	D
Approach Delay	8.8	19.0	19.0	38.1	49.4	49.4	49.4
Approach LOS	A	B	B	D	D	D	D
Intersection Summary							
Cycle Length: 130							
Actuated Cycle Length: 130							
Offset: 0 (0%), Referenced to phase 2:WBT and 6:EBTL, Start of Green							
Natural Cycle: 80							
Control Type: Actuated-Coordinated							
Maximum v/c Ratio: 0.83							
Intersection Signal Delay: 19.7							
Intersection Capacity Utilization 69.1%							
Analysis Period (min) 15							

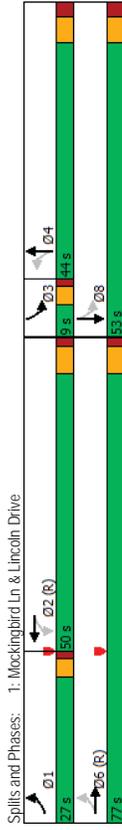

Smoke Tree Resort
Existing AM

1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	4	4	4	4	4	4	4	4	4	8	8
Traffic Volume (veh/h)	212	815	29	19	801	39	5	33	15	70	85	216
Future Volume (veh/h)	212	815	29	19	801	39	5	33	15	70	85	216
Initial Q (Obs.) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No											
Adj Sat Flow (veh/h)	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	236	906	32	21	890	43	6	37	17	78	94	240
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh. %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	439	2371	84	393	1984	96	88	191	88	301	106	270
Arrive On Green	0.07	0.68	0.68	0.58	0.58	0.58	0.16	0.16	0.16	0.04	0.23	0.23
Sat Flow, veh/h	1781	3501	124	597	3450	167	1046	1213	557	1781	466	1190
Grp Volume(v), veh/h	236	460	478	21	458	475	6	0	54	78	0	334
Grp Sat Flow(s),veh/h	1781	1777	1848	597	1777	1840	1046	0	1770	1781	0	1656
Q Serve(g.s), s	6.7	14.6	14.6	2.1	19.2	19.2	0.7	0.0	3.4	4.7	0.0	25.4
Cycle O Clear(g.c), s	6.7	14.6	14.6	3.4	19.2	17.1	0.0	0.0	3.4	4.7	0.0	25.4
Prop In Lane	1.00	0.07	1.00	1.00	0.09	1.00	0.09	1.00	0.31	1.00	0.72	1.00
V/C Ratio(X)	0.54	0.38	0.38	0.05	0.45	0.45	0.07	0.00	0.19	0.26	0.00	0.89
Avail Cap(c.a), veh/h	439	2303	1252	393	1022	1058	88	0	279	301	0	375
Avail Cap(c), veh/h	627	2303	1252	393	1022	1058	225	0	511	301	0	592
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(0)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	11.4	9.1	9.1	12.8	15.8	15.8	61.4	0.0	47.6	42.4	0.0	48.7
Incr Delay (d2), s/veh	1.0	0.9	0.9	0.3	1.4	1.4	0.3	0.0	0.3	0.5	0.0	10.2
Initial Q Delay(g3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile Back(Q50%),veh/m	2.7	5.7	6.0	0.3	8.1	8.4	0.2	0.0	1.6	2.1	0.0	11.5
Unsig. Movement Delay, s/veh												
LnGrp Delay(d)s/veh	12.4	10.1	10.0	13.0	17.2	17.2	61.7	0.0	47.9	42.9	0.0	58.9
LnGrp LOS	B	B	B	B	B	B	E	A	D	D	A	E
Approach Vol, veh/h												
Approach Delay, s/veh												
Approach LOS												
Timer - Assigned Phs	1	2	3	4	6	8						
Phs Duration (G+Y+Rc), s	13.3	80.8	9.0	27.0	94.0	36.0						
Change Period (Y+Rc), s	4.0	6.0	4.0	6.5	6.0	6.5						
Max Green Setting (Gmax), s	23.0	44.0	5.0	37.5	71.0	46.5						
Max Q Clear Time (g_c+I1), s	8.7	21.2	6.7	19.1	16.6	27.4						
Green Ext Time (g_e), s	0.6	6.7	0.0	0.2	7.6	2.1						
Intersection Summary												
HCM 6th Ctrl Delay												
HCM 6th LOS												

Smoke Tree Resort
Existing AM

2: Quail Run Rd & Lincoln Drive
HCM 6th TWSC

Intersection													
Int Delay, s/veh	0.1												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↖	↖	↖	↖	↖	↖							↖
Traffic Vol, veh/h	0	962	3	2	819	1	0	0	7	2	0	6	
Future Vol, veh/h	0	962	3	2	819	1	0	0	7	2	0	6	
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop	
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None	
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-	
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-	
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	
Mvmt Flow	0	1069	3	2	910	1	0	0	8	2	0	7	
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	911	0	0	1072	0	0	1530	1986	536	1450	1987	456	
Stage 1	-	-	-	-	-	-	1071	1071	-	915	915	-	
Stage 2	-	-	-	-	-	-	459	915	-	535	1072	-	
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	6.54	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-	
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-	
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	4.02	3.32	
Pl Cap-1 Maneuver	743	-	-	646	-	-	80	60	489	92	60	551	
Stage 1	-	-	-	-	-	-	236	295	-	294	350	-	
Stage 2	-	-	-	-	-	-	551	350	-	497	295	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	743	-	-	646	-	-	79	60	489	90	60	551	
Mov Cap-2 Maneuver	-	-	-	-	-	-	79	60	-	90	60	-	
Stage 1	-	-	-	-	-	-	236	295	-	294	349	-	
Stage 2	-	-	-	-	-	-	543	349	-	489	295	-	
Approach	EB	WB	NB	SB									
HCM Control Delay, s	0	0	12.5	20.4									
HCM LOS			B	C									
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1					
Capacity (veh/h)	489	743	-	-	646	-	-	242					
HCM Lane V/C Ratio	0.016	-	-	-	0.003	-	-	0.037					
HCM Control Delay (s)	12.5	0	-	-	10.6	-	-	20.4					
HCM Lane LOS	B	A	-	-	B	-	-	C					
HCM 95th %ile Q(veh)	0	0	-	-	0	-	-	0.1					

Smoke Tree Resort
Existing AM

3: Smole Tree West & Lincoln Dr
HCM 6th TWSC

Intersection															
Int Delay, s/veh	0														
Movement	EBT	EBR	WBL	WBT	NBL	NBR									
Lane Configurations	↖	↖	↖	↖	↖	↖									
Traffic Vol, veh/h	968	2	1	818	4	0									
Future Vol, veh/h	968	2	1	818	4	0									
Conflicting Peds, #/hr	0	0	0	0	0	0									
Sign Control	Free	Free	Free	Free	Stop	Stop									
RT Channelized	-	None	-	None	-	None									
Storage Length	-	-	25	-	-	0									
Veh in Median Storage, #	0	-	-	0	0	0									
Grade, %	0	-	-	0	0	0									
Peak Hour Factor	90	90	90	90	90	90									
Heavy Vehicles, %	2	2	2	2	2	2									
Mvmt Flow	1076	2	1	909	4	0									
Major/Minor	Major1	Major2	Minor1												
Conflicting Flow All	0	0	1078	0	1534	539									
Stage 1	-	-	-	-	1077	-									
Stage 2	-	-	-	-	457	-									
Critical Hdwy	-	-	4.14	-	6.84	6.94									
Critical Hdwy Stg 1	-	-	-	-	5.84	-									
Critical Hdwy Stg 2	-	-	-	-	5.84	-									
Follow-up Hdwy	-	-	2.22	-	3.52	3.32									
Pl Cap-1 Maneuver	-	-	643	-	107	487									
Stage 1	-	-	-	-	288	-									
Stage 2	-	-	-	-	604	-									
Platoon blocked, %	-	-	-	-	-	-									
Mov Cap-1 Maneuver	-	-	643	-	107	487									
Mov Cap-2 Maneuver	-	-	-	-	218	-									
Stage 1	-	-	-	-	287	-									
Stage 2	-	-	-	-	604	-									
Approach	EB	WB	NB												
HCM Control Delay, s	0	0	21.9												
HCM LOS			C												
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT										
Capacity (veh/h)	218	-	-	643	-										
HCM Lane V/C Ratio	0.02	-	-	0.002	-										
HCM Control Delay (s)	21.9	-	-	10.6	-										
HCM Lane LOS	C	-	-	B	-										
HCM 95th %ile Q(veh)	0.1	-	-	0	-										

Smoke Tree Resort
Existing AM

4: Smoke Tree East & Lincoln Dr
HCM 6th TWSC

Intersection	0									
Int Delay, s/veh	0									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↔	↔	↔	↔	↔	↔				
Traffic Vol, veh/h	970	0	0	815	1	2				
Future Vol, veh/h	970	0	0	815	1	2				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	0	0	-				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	1078	0	0	906	1	2				
Major/Minor	Major1	Major2	Minor1		Minor2					
Conflicting Flow All	0	0	1078	0	1531	539				
Stage 1	-	-	-	-	1078	-				
Stage 2	-	-	-	-	-	453				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	-	5.84				
Critical Hdwy Stg 2	-	-	-	-	-	5.84				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	643	-	108	487				
Stage 1	-	-	-	-	288	-				
Stage 2	-	-	-	-	-	607				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	643	-	108	487				
Mov Cap-2 Maneuver	-	-	-	-	219	-				
Stage 1	-	-	-	-	288	-				
Stage 2	-	-	-	-	-	607				
Approach	EB	WB	NB		CB					
HCM Control Delay, s	0	0	0	0	15.5	15.5				
HCM LOS							C			
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	346	-	-	643	-					
HCM Lane V/C Ratio	0.01	-	-	-	-					
HCM Control Delay (s)	15.5	-	-	0	-					
HCM Lane LOS	C	-	-	A	-					
HCM 95th %tile Q(veh)	0	-	-	0	-					

Smoke Tree Resort
Existing AM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	0									
Int Delay, s/veh	0									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↔	↔	↔	↔	↔	↔				
Traffic Vol, veh/h	968	4	0	815	0	3				
Future Vol, veh/h	968	4	0	815	0	3				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	0	0	-				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	1076	4	0	906	0	3				
Major/Minor	Major1	Major2	Minor1		Minor2					
Conflicting Flow All	0	0	1080	0	1531	540				
Stage 1	-	-	-	-	1078	-				
Stage 2	-	-	-	-	-	453				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	-	5.84				
Critical Hdwy Stg 2	-	-	-	-	-	5.84				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	641	-	108	486				
Stage 1	-	-	-	-	288	-				
Stage 2	-	-	-	-	-	607				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	641	-	108	486				
Mov Cap-2 Maneuver	-	-	-	-	219	-				
Stage 1	-	-	-	-	288	-				
Stage 2	-	-	-	-	-	607				
Approach	EB	WB	NB		CB					
HCM Control Delay, s	0	0	0	0	12.5	12.5				
HCM LOS							B			
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	486	-	-	641	-					
HCM Lane V/C Ratio	0.007	-	-	-	-					
HCM Control Delay (s)	12.5	-	-	0	-					
HCM Lane LOS	B	-	-	A	-					
HCM 95th %tile Q(veh)	0	-	-	0	-					

Smoke Tree Resort
Existing AM

6: Lincoln Medical East & Lincoln Dr
HCM 6th TWSC

Intersection												
Int Delay, s/veh												5.8
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	967	2	5	815	0	3						
Future Vol, veh/h	967	2	5	815	0	3						
Conflicting Peds, #/hr	0	0	0	0	0	0						
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	None	-	None	-	None	-	None	-	None	-	None
Storage Length	-	-	25	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-	-	-	-	-	-	-
Grade, %	0	-	-	-	-	-	-	-	-	-	-	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	1074	2	6	906	0	3						
Major/Minor												
	Major1	Major2	Minor1	Minor2								
Conflicting Flow All	0	0	1076	0	1540	538						
Stage 1	-	-	-	-	1075	-						
Stage 2	-	-	-	-	465	-						
Critical Hdwy	-	-	4.14	-	6.84	6.94						
Critical Hdwy Stg 1	-	-	-	-	5.84	-						
Critical Hdwy Stg 2	-	-	-	-	5.84	-						
Follow-up Hdwy	-	-	2.22	-	3.52	3.32						
Plat Cap-1 Maneuver	-	-	644	-	106	488						
Stage 1	-	-	-	-	289	-						
Stage 2	-	-	-	-	599	-						
Platoon blocked, %	-	-	-	-	-	-						
Mov Cap-1 Maneuver	-	-	644	-	105	488						
Mov Cap-2 Maneuver	-	-	-	-	216	-						
Stage 1	-	-	-	-	286	-						
Stage 2	-	-	-	-	599	-						
Approach												
	EB	WB	WB	NB								
HCM Control Delay, s	0	0.1	0.1	12.4								
HCM LOS				B								
Minor Lane/Major Mvmt												
	NBLn1	EBL	EBR	WBL	WBT							
Capacity (veh/h)	488	-	-	644	-							
HCM Lane V/C Ratio	0.007	-	-	0.009	-							
HCM Control Delay (s)	12.4	-	-	10.6	-							
HCM Lane LOS	B	-	-	B	-							
HCM 95th %ile Q(veh)	0	-	-	0	-							

Smoke Tree Resort
Existing AM

7: Apartment Drwy & Lincoln Dr
HCM 6th TWSC

Intersection												
Int Delay, s/veh												5.8
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	26	912	34	18	757	10	50	0	29	5	0	12
Future Vol, veh/h	26	912	34	18	757	10	50	0	29	5	0	12
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	None	-	None	-	None	-	None	-	None	-	None
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	-	-	-	-	-	-	-	-
Grade, %	0	-	-	-	-	-	-	-	-	-	-	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	29	1013	38	20	841	11	56	0	32	6	0	13
Major/Minor												
	Major1	Major2	Minor1	Minor2								
Conflicting Flow All	852	0	0	1051	0	1551	1982	526	1452	-	426	-
Stage 1	-	-	-	-	-	1090	1090	-	887	-	-	-
Stage 2	-	-	-	-	-	461	892	-	565	-	-	-
Critical Hdwy	4.14	-	-	4.14	-	7.54	6.54	6.94	7.54	-	6.94	-
Critical Hdwy Stg 1	-	-	-	-	-	6.54	5.54	-	6.54	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	6.54	5.54	-	6.54	-	-	-
Follow-up Hdwy	2.22	-	-	2.22	-	3.52	4.02	3.32	3.52	-	3.32	-
Plat Cap-1 Maneuver	783	-	-	658	-	77	61	496	92	0	577	-
Stage 1	-	-	-	-	-	230	289	-	305	0	-	-
Stage 2	-	-	-	-	-	550	358	-	477	0	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	783	-	-	658	-	71	57	496	82	-	577	-
Mov Cap-2 Maneuver	-	-	-	-	-	71	57	-	82	-	-	-
Stage 1	-	-	-	-	-	221	278	-	294	-	-	-
Stage 2	-	-	-	-	-	521	347	-	429	-	-	-
Approach												
	EB	WB	WB	NB	SB							
HCM Control Delay, s	0.3	0.2	0.2	124.4	23.4							
HCM LOS				F	C							
Minor Lane/Major Mvmt												
	NBLn1	EBL	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	104	783	-	-	658	-	-	82	577			
HCM Lane V/C Ratio	0.844	0.037	-	-	0.03	-	-	0.068	0.023			
HCM Control Delay (s)	124.4	9.8	-	-	10.6	-	-	52.1	11.4			
HCM Lane LOS	F	A	-	-	B	-	-	F	B			
HCM 95th %ile Q(veh)	4.8	0.1	-	-	0.1	-	-	0.2	0.1			

Smoke Tree Resort
Existing AM


8: AJ's Drwy & Lincoln Dr
HCM 6th TWSC

Intersection	1																
Init Delay, s/veh																	
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR					
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	
Traffic Vol, veh/h	3	892	53	43	769	8	6	0	41	4	1	12					
Future Vol, veh/h	3	892	53	43	769	8	6	0	41	4	1	12					
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Sign Control	Free																
RT Channelized	-																
Storage Length	25																
Veh in Median Storage, #	-																
Grade, %	-																
Peak Hour Factor	0.90																
Heavy Vehicles, %	2																
Mgmt Flow	3																
	Major1				Major2				Minor1				Minor2				
Conflicting Flow All	863	0	0	1050	0	0	1551	1986	525	1457	2011	432					
Stage 1	-	-	-	-	-	-	-	1027	1027	-	955	955	-				
Stage 2	-	-	-	-	-	-	-	524	959	-	502	1056	-				
Critical Hdwy	4:14	-	-	4:14	-	-	7:54	6:54	6:94	7:54	6:54	6:94	-				
Critical Hdwy Slg 1	-	-	-	-	-	-	-	6:54	5:54	-	6:54	5:54	-				
Critical Hdwy Slg 2	-	-	-	-	-	-	-	6:54	5:54	-	6:54	5:54	-				
Follow-up Hdwy	2:22	-	-	2:22	-	-	3:52	4:02	3:32	3:52	4:02	3:32	-				
Pl Cap-1 Maneuver	7:75	-	-	6:59	-	-	7:7	6:0	4:97	9:1	5:8	5:72	-				
Stage 1	-	-	-	-	-	-	-	251	310	-	278	335	-				
Stage 2	-	-	-	-	-	-	-	504	334	-	520	300	-				
Platoon blocked, %	-																
Mov Cap-1 Maneuver	7:75	-	-	6:59	-	-	7:0	5:5	4:97	7:8	5:4	5:72	-				
Mov Cap-2 Maneuver	-	-	-	-	-	-	-	7:0	5:5	-	7:8	5:4	-				
Stage 1	-	-	-	-	-	-	-	250	309	-	277	311	-				
Stage 2	-	-	-	-	-	-	-	455	310	-	471	299	-				
Approach	EB	WB	NB	WB	NB	SB	SB	SB	SB	SB	SB	SB	SB				
HCM Control Delay, s	0	0.6	0.6	20.9	20.9	22	22	22	22	22	22	22	22				
HCM LOS	C	C	C	C	C	C	C	C	C	C	C	C	C				
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2	SBLn2	SBLn2	SBLn2	SBLn2				
Capacity (veh/h)	279	775	-	-	659	-	-	78	572	-	78	572	-				
HCM Lane V/C Ratio	0.187	0.004	-	-	0.073	-	-	0.057	0.023	-	0.057	0.023	-				
HCM Control Delay (s)	20.9	9.7	-	-	10.9	-	-	53.9	11.4	-	53.9	11.4	-				
HCM Lane LOS	C	A	-	-	B	-	-	F	B	-	F	B	-				
HCM 95th %ile Q(veh)	0.7	0	-	-	0.2	-	-	0.2	0.1	-	0.2	0.1	-				

Smoke Tree Resort
Existing AM

9: Scottsdale Rd & Lincoln Dr
Timings

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	422	37	426	36	35	260	1251	48	1594	557	48	1594
Future Volume (vph)	422	37	426	36	35	260	1251	48	1594	557	48	1594
Turn Type	Split	NA	pm+ov									
Protected Phases	4	4	5	8	8	5	2	1	6	4	4	4
Permitted Phases	4											
Detector Phase	4											
Switch Phase	4											
Minimum Initial (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0
Minimum Split (s)	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0	13.0
Total Split (s)	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0
Total Split (%)	23.1%	23.1%	23.1%	10.0%	10.0%	23.1%	56.2%	10.8%	43.8%	23.1%	43.8%	23.1%
Yellow Time (s)	4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0	4.0	4.0
All-Red Time (s)	1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5	1.0	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5	5.3	5.5
Lead/Lag	Lead											
Lead-Lag Optimize?	None											
Recall Mode	None											
Act Effct Green (s)	23.0	23.0	39.9	7.2	7.2	16.9	72.2	7.5	60.6	89.3	7.5	60.6
Actuated v/c Ratio	0.18	0.18	0.31	0.06	0.06	0.13	0.56	0.06	0.47	0.69	0.06	0.47
v/c Ratio	0.85	0.86	0.89	0.41	0.39	0.65	0.51	0.52	0.75	0.53	0.52	0.75
Control Delay	77.2	77.4	44.6	72.1	34.3	60.0	19.6	77.2	32.1	8.4	77.2	32.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	77.2	77.4	44.6	72.1	34.3	60.0	19.6	77.2	32.1	8.4	77.2	32.1
LOS	E	E	D	E	C	E	B	E	C	A	E	C
Approach Delay	61.6											
Approach LOS	E											
Intersection Summary	E											
Cycle Length: 130	E											
Actuated Cycle Length: 130	E											
Offset: 0 (0%), Referenced to phase 6:SBT, Start of Green	E											
Natural Cycle: 90	E											
Control Type: Actuated-Coordinated	E											
Maximum v/c Ratio: 0.89	E											
Intersection Signal Delay: 33.8	E											
Intersection Capacity Utilization 77.0%	E											
Analysis Period (min): 15	E											
	Lead				Lag				Lead			
	61.6				46.0				26.4			
	C				D				C			
Intersection Summary	E											
Cycle Length: 130	E											
Actuated Cycle Length: 130	E											
Offset: 0 (0%), Referenced to phase 6:SBT, Start of Green	E											
Natural Cycle: 90	E											
Control Type: Actuated-Coordinated	E											
Maximum v/c Ratio: 0.89	E											
Intersection Signal Delay: 33.8	E											
Intersection Capacity Utilization 77.0%	E											
Analysis Period (min): 15	E											

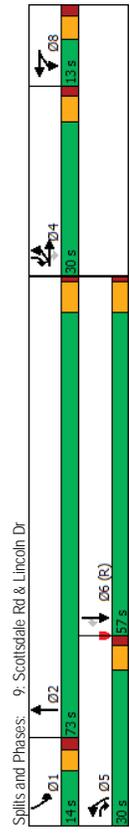

Smoke Tree Resort
Existing AM

9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary


Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (veh/h)	422	37	426	36	35	45	260	1251	38	48	1594	557
Future Volume (veh/h)	422	37	426	36	35	45	260	1251	38	48	1594	557
Initial Q (Q _{bb}), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pb1)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No	No	No	No	No	No	No	No	No	No	No	No
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	498	0	473	40	39	50	289	1390	42	53	1771	619
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	671	0	458	95	95	85	348	2336	71	68	2015	924
Arrive On Green	0.19	0.00	0.19	0.05	0.05	0.05	0.10	0.46	0.46	0.04	0.39	0.39
Sat Flow, veh/h	3563	0	1585	1781	1777	1585	3456	5093	154	1781	5106	1585
Grp Volume(v), veh/h	498	0	473	40	39	50	289	929	503	53	1771	619
Grp Sat Flow(s),veh/h	1781	0	1585	1781	1777	1585	1728	1702	1843	1781	1702	1585
Q Serve(g_s), s	17.1	0.0	24.5	2.8	2.8	2.8	4.0	10.7	26.4	3.8	41.8	34.7
Cycle Q Clear(g_c), s	17.1	0.0	24.5	2.8	2.8	2.8	4.0	10.7	26.4	3.8	41.8	34.7
Prop In Lane	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lane Grp Cap(c), veh/h	671	0	458	95	95	85	348	1561	845	68	2015	924
V/C Ratio(x)	0.74	0.00	1.03	0.42	0.41	0.59	0.83	0.60	0.60	0.78	0.88	0.67
Avail Cap(c_a), veh/h	671	0	458	101	101	90	651	1762	954	119	2015	924
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	49.8	0.0	46.2	59.6	59.6	60.1	57.4	26.2	26.2	62.0	36.5	18.5
Incr Delay (d2), s/veh	3.9	0.0	50.4	1.1	1.1	5.4	2.0	0.2	0.4	6.9	5.9	3.9
Initial Q Delay(Q3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(50%),veh/h	8.0	0.0	21.1	1.3	1.3	1.7	4.8	10.7	11.6	1.9	18.2	20.2
Unsig. Movement Delay, s/veh												
LnGrp Delay(d)s/veh	53.7	0.0	96.6	60.7	60.6	65.5	59.3	26.4	26.6	68.8	42.3	22.4
LnGrp LOS	D	A	F	E	E	E	E	C	C	E	D	C
Approach Vol, veh/h	971			129				1721				2443
Approach Delay, s/veh	74.6			62.5				32.0				37.9
Approach LOS	E			E				C				D
Timer - Assigned Phs	1	2	4	5	6	8						
Phs Duration (G+Y+Rc), s	10.3	65.3	30.0	18.6	57.0	12.5						
Change Period (Y+Rc), s	* 5.3	5.7	5.5	5.5	5.7	5.6						
Max Green Setting (Gmax), s	* 8.7	67.3	24.5	24.5	51.3	7.4						
Max Q Clear Time (g_c+1T), s	5.8	28.4	26.5	12.7	43.8	6.0						
Green Ext Time (p_c), s	0.0	2.1	0.0	0.4	2.5	0.0						
Intersection Summary												
HCM 6th Ctrl Delay												
HCM 6th LOS												

Notes
User approved pedestrian interval to be less than phase max green.
User approved volume balancing among the lanes for turning movement.
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.

Smoke Tree Resort
Existing PM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL
Lane Configurations	228	764	12	805	7	60	57
Traffic Volume (vph)	228	764	12	805	7	60	57
Future Volume (vph)	228	764	12	805	7	60	57
Turn Type	pm+pt	NA	Perm	NA	pm+pt	NA	NA
Protected Phases	1	6	2	2	4	3	8
Permitted Phases	6	6	2	2	4	4	8
Detector Phase	1	6	2	2	4	4	3
Switch Phase							
Minimum Initial (s)	4.0	15.0	15.0	7.0	7.0	4.0	7.0
Minimum Split (s)	8.0	27.0	27.0	33.5	33.5	8.0	33.5
Total Split (s)	31.0	88.0	57.0	34.0	34.0	8.0	42.0
Total Split (%)	23.8%	67.7%	43.8%	43.8%	26.2%	6.2%	32.3%
Yellow Time (s)	3.0	4.5	4.5	4.0	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	2.5	2.5	1.0	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.5	6.5	4.0	6.5
Lead/Lag	Lead	Lag	Lag	Lag	Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	102.4	100.4	84.3	84.3	107.7	19.6	17.1
Actuated g/C Ratio	0.79	0.77	0.65	0.65	0.08	0.15	0.13
v/c Ratio	0.53	0.32	0.03	0.42	0.10	0.51	0.37
Control Delay	8.1	5.3	11.8	13.0	55.7	63.3	32.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	8.1	5.3	11.8	13.0	55.7	63.3	32.6
LOS	A	A	B	E	E	D	C
Approach Delay	5.9		13.0	62.6		37.3	
Approach LOS	A		B	E	E	D	
Intersection Summary							
Cycle Length: 130							
Actuated Cycle Length: 130							
Offset: 0 (0%), Referenced to phase 2:WBT, and 6:EBT, Start of Green							
Natural Cycle: 90							
Control Type: Actuated-Coordinated							
Maximum v/c Ratio: 0.66							
Intersection Signal Delay: 14.2							
Intersection Capacity Utilization 61.8%							
Analysis Period (min) 15							

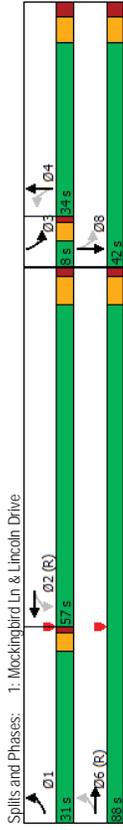

Smoke Tree Resort
Existing PM

1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	228	764	28	12	805	56	7	60	10	57	46	145
Traffic Volume (veh/h)	228	764	28	12	805	56	7	60	10	57	46	145
Future Volume (veh/h)	228	764	28	12	805	56	7	60	10	57	46	145
Initial Q (Obs) veh	0	0	0	0	0	0	0	0	0	0	0	0
Pod-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No	No	No	No	No	No	No	No	No	No	No	No
Adj Sat Flow (veh/h)	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	253	849	31	13	894	62	8	67	11	63	51	161
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	484	2635	96	471	2222	154	84	139	23	173	59	188
Arrive On Green	0.06	0.75	0.75	0.66	0.66	0.66	0.09	0.09	0.09	0.03	0.15	0.15
Sat Flow, veh/h	1781	3497	128	631	3371	234	1170	1567	257	1781	396	1250
Grp Volume(v), veh/h	253	431	449	13	471	485	8	78	63	0	212	0
Grp Sat Flow(s),veh/h	1781	1777	1847	631	1777	1828	1170	0	1824	1781	0	1645
Q Serve(g.s), s	5.6	10.3	10.3	0.9	16.0	16.0	0.9	0.0	5.3	4.0	0.0	16.3
Cycle Q Clear(g.c), s	5.6	10.3	10.3	0.9	16.0	16.0	0.9	0.0	5.3	4.0	0.0	16.3
Prop In Lane	1.00	0.07	1.00	1.00	1.00	1.00	1.00	0.14	1.00	1.00	0.76	0.247
Lane Grp Cap(c), veh/h	484	1339	1392	471	1171	1205	84	0	162	173	0	247
v/c Ratio(x)	0.52	0.32	0.32	0.03	0.40	0.40	0.10	0.00	0.48	0.36	0.00	0.86
Avail Cap(c.a), veh/h	740	1339	1392	471	1171	1205	228	0	386	173	0	449
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	7.4	5.2	5.2	7.7	10.3	10.3	62.3	0.0	56.4	50.9	0.0	53.9
Incr Delay (d2), s/veh	0.9	0.6	0.6	0.1	1.0	1.0	0.5	0.0	2.2	1.3	0.0	8.4
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.0	3.7	3.8	0.1	6.4	6.6	0.3	0.0	2.5	1.9	0.0	7.3
Unsig. Movement Delay, s/veh												
LnGrp Delay(d)S/veh	8.3	5.8	5.8	7.8	11.3	11.3	62.8	0.0	58.6	52.1	0.0	62.3
LnGrp LOS	A	A	A	A	B	B	E	A	E	D	A	E
Approach Vol, veh/h	1133			969			86				275	
Approach Delay, s/veh	6.4			11.3			59.0				60.0	
Approach LOS	A			B			E				E	
Timer - Assigned Phs	1	2	3	4	6	8						
Phs Duration (G+Y+Rc), s	12.3	91.7	8.0	18.0	104.0	26.0						
Change Period (Y+Rc), s	4.0	6.0	4.0	6.5	6.0	6.5						
Max Green Setting (Gmax), s	27.0	51.0	4.0	27.5	82.0	35.5						
Max Q Clear Time (g_c+I1), s	7.6	18.0	6.0	11.2	12.3	18.3						
Green EXT Time (g_e), s	0.7	7.5	0.0	0.3	6.9	1.1						
Intersection Summary												
HCM 6th Ctrl Delay												
HCM 6th LOS												

Smoke Tree Resort
Existing PM

2: Quail Run Rd & Lincoln Drive
HCM 6th TWSC

Intersection													
Init Delay, s/wch													0
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖
Traffic Vol, veh/h	0	846	1	0	871	0	0	0	0	2	0	0	0
Future Vol, veh/h	0	846	1	0	871	0	0	0	0	2	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-									
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	940	1	0	968	0	0	0	0	2	0	0	0
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	968	0	0	941	0	0	1425	1909	471	1438	1909	484	
Stage 1	-	-	-	-	-	-	941	941	-	968	968	-	
Stage 2	-	-	-	-	-	-	484	968	-	470	941	-	
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	6.54	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-	
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-	
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	4.02	3.32	
Pl Cap-1 Maneuver	707	-	-	724	-	-	96	68	539	94	68	529	
Stage 1	-	-	-	-	-	-	283	340	-	273	330	-	
Stage 2	-	-	-	-	-	-	533	330	-	543	340	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	707	-	-	724	-	-	96	68	539	94	68	529	
Mov Cap-2 Maneuver	-	-	-	-	-	-	96	68	-	94	68	-	
Stage 1	-	-	-	-	-	-	283	340	-	273	330	-	
Stage 2	-	-	-	-	-	-	533	330	-	541	340	-	
Approach	EB	WB	NB	WB	NB	SB							
HCM Control Delay, s	0	0	11.7	0	11.7	0							
HCM LOS			B		B	A							
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1					
Capacity (veh/h)	539	707	-	-	724	-	-	-					
HCM Lane V/C Ratio	0.004	-	-	-	-	-	-	-					
HCM Control Delay (s)	11.7	0	-	-	0	-	-	0					
HCM Lane LOS	B	A	-	-	A	-	-	A					
HCM 95th %tile Q(veh)	0	0	-	-	0	-	-	-					

Smoke Tree Resort
Existing PM

3: Smole Tree West & Lincoln Dr
HCM 6th TWSC

Intersection													
Init Delay, s/wch													0
Movement	EBT	EBR	WBL	WBT	NBL	NBR							
Lane Configurations	↖	↖	↖	↖	↖	↖							
Traffic Vol, veh/h	848	1	0	870	1	0							
Future Vol, veh/h	848	1	0	870	1	0							
Conflicting Peds, #/hr	0	0	0	0	0	0							
Sign Control	Free	Free	Free	Free	Stop	Stop							
RT Channelized	-	None	-	None	-	None							
Storage Length	-	-	25	-	-	0							
Veh in Median Storage, #	0	-	-	0	-	0							
Grade, %	-	0	-	-	0	0							
Peak Hour Factor	90	90	90	90	90	90							
Heavy Vehicles, %	2	2	2	2	2	2							
Mvmt Flow	942	1	0	967	1	0							
Major/Minor	Major1	Major2	Minor1	Minor2	Minor1	Minor2							
Conflicting Flow All	0	0	943	0	1427	472							
Stage 1	-	-	-	-	943	-							
Stage 2	-	-	-	-	484	-							
Critical Hdwy	-	-	4.14	-	6.84	6.94							
Critical Hdwy Stg 1	-	-	-	-	5.84	-							
Critical Hdwy Stg 2	-	-	-	-	5.84	-							
Follow-up Hdwy	-	-	2.22	-	3.52	3.32							
Pl Cap-1 Maneuver	-	-	723	-	126	538							
Stage 1	-	-	-	-	339	-							
Stage 2	-	-	-	-	585	-							
Platoon blocked, %	-	-	-	-	-	-							
Mov Cap-1 Maneuver	-	-	723	-	126	538							
Mov Cap-2 Maneuver	-	-	-	-	248	-							
Stage 1	-	-	-	-	339	-							
Stage 2	-	-	-	-	585	-							
Approach	EB	WB	NB	NB									
HCM Control Delay, s	0	0	19.6	0	19.6	0							
HCM LOS			C		C								
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT								
Capacity (veh/h)	248	-	-	723	-								
HCM Lane V/C Ratio	0.004	-	-	-	-								
HCM Control Delay (s)	19.6	-	-	0	-								
HCM Lane LOS	C	-	-	A	-								
HCM 95th %tile Q(veh)	0	-	-	0	-								

Smoke Tree Resort
Existing PM

4: Smoke Tree East & Lincoln Dr
HCM 6th TWSC

Intersection	0									
Int Delay, s/veh	0									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↕	↕	↕	↕	↕	↕				
Traffic Vol, veh/h	847	1	2	870	1	2				
Future Vol, veh/h	847	1	2	870	1	2				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	0	0	-				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	941	1	2	967	1	2				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	942	0	1430	471				
Stage 1	-	-	942	-	-	488				
Stage 2	-	-	-	-	-	-				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	724	-	125	539				
Stage 1	-	-	-	-	340	-				
Stage 2	-	-	-	-	583	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	724	-	125	539				
Mov Cap-2 Maneuver	-	-	-	-	247	-				
Stage 1	-	-	-	-	339	-				
Stage 2	-	-	-	-	583	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0	14.4							
HCM LOS	B									
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	387	-	-	724	-					
HCM Lane V/C Ratio	0.009	-	-	0.003	-					
HCM Control Delay (s)	14.4	-	-	10	-					
HCM Lane LOS	B	-	-	A	-					
HCM 95th %ile Q(veh)	0	-	-	0	-					

Smoke Tree Resort
Existing PM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	0									
Int Delay, s/veh	0									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↕	↕	↕	↕	↕	↕				
Traffic Vol, veh/h	849	0	0	870	2	0				
Future Vol, veh/h	849	0	0	870	2	0				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	0	0	-				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	943	0	0	967	2	0				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	943	0	1427	472				
Stage 1	-	-	943	-	-	484				
Stage 2	-	-	-	-	-	-				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	723	-	126	538				
Stage 1	-	-	-	-	339	-				
Stage 2	-	-	-	-	585	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	723	-	126	538				
Mov Cap-2 Maneuver	-	-	-	-	248	-				
Stage 1	-	-	-	-	339	-				
Stage 2	-	-	-	-	585	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0	19.6							
HCM LOS	C									
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	248	-	-	723	-					
HCM Lane V/C Ratio	0.009	-	-	0	-					
HCM Control Delay (s)	19.6	-	-	0	-					
HCM Lane LOS	C	-	-	A	-					
HCM 95th %ile Q(veh)	0	-	-	0	-					

Smoke Tree Resort
Existing PM

6: Lincoln Medical East & Lincoln Dr
HCM 6th TWSC

Intersection	7.6											
Int Delay, s/veh	0											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖
Traffic Vol, veh/h	849	0	0	869	2	3						
Future Vol, veh/h	849	0	0	869	2	3						
Conflicting Peds, #/hr	0	0	0	0	0	0						
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	None	-	None	-	None	-	None	-	None	-	None
Storage Length	-	-	25	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	-	-	-	-	-	-	-
Grade, %	0	-	-	-	-	-	-	-	-	-	-	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	943	0	0	966	2	3						
Major/Minor	Major1	Major2	Minor1									
Conflicting Flow All	0	0	943	0	1426	472						
Stage 1	-	-	-	943	-	-						
Stage 2	-	-	-	-	483	-						
Critical Hdwy	-	-	-	4.14	-	6.84	6.94					
Critical Hdwy Stg 1	-	-	-	-	-	5.84	-					
Critical Hdwy Stg 2	-	-	-	-	-	5.84	-					
Follow-up Hdwy	-	-	-	2.22	-	3.52	3.32					
Pot Cap-1 Maneuver	-	-	-	723	-	126	538					
Stage 1	-	-	-	-	-	339	-					
Stage 2	-	-	-	-	-	586	-					
Platoon blocked, %	-	-	-	-	-	-	-					
Mov Cap-1 Maneuver	-	-	-	723	-	126	538					
Mov Cap-2 Maneuver	-	-	-	-	-	248	-					
Stage 1	-	-	-	-	-	339	-					
Stage 2	-	-	-	-	-	586	-					
Approach	EB	WB	NB									
HCM Control Delay, s	0	0	15									
HCM LOS	C											
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT							
Capacity (veh/h)	367	-	-	723	-							
HCM Lane V/C Ratio	0.015	-	-	-	-							
HCM Control Delay (s)	15	-	-	0	-							
HCM Lane LOS	C	-	-	A	-							
HCM 95th %ile Q(veh)	0	-	-	0	-							

Smoke Tree Resort
Existing PM

7: Apartment Drwy & Lincoln Dr
HCM 6th TWSC

Intersection	7.6											
Int Delay, s/veh	7.6											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖
Traffic Vol, veh/h	792	41	6	777	9	66	3	47	7	0	34	
Future Vol, veh/h	792	41	6	777	9	66	3	47	7	0	34	
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	None	-	None	-	None	-	None	-	None	-	None
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	-	-	-	-	-	-	-	-
Grade, %	0	-	-	-	-	-	-	-	-	-	-	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	880	46	7	863	10	73	3	52	8	0	38	
Major/Minor	Major1	Major2	Minor1									
Conflicting Flow All	873	0	0	926	0	1365	1806	463	1340	-	437	
Stage 1	-	-	-	-	-	919	919	-	882	-	-	
Stage 2	-	-	-	-	-	446	887	-	458	-	-	
Critical Hdwy	4.14	-	-	4.14	-	7.54	6.54	6.94	7.54	-	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Critical Hdwy Stg 2	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Follow-up Hdwy	2.22	-	-	2.22	-	3.52	4.02	3.32	3.52	-	3.32	
Pot Cap-1 Maneuver	768	-	-	734	-	106	78	546	111	0	567	
Stage 1	-	-	-	-	-	292	348	-	307	0	-	
Stage 2	-	-	-	-	-	561	360	-	552	0	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	768	-	-	734	-	97	76	546	96	-	567	
Mov Cap-2 Maneuver	-	-	-	-	-	97	76	-	96	-	-	
Stage 1	-	-	-	-	-	289	345	-	304	-	-	
Stage 2	-	-	-	-	-	519	356	-	489	-	-	
Approach	EB	WB	NB									
HCM Control Delay, s	0.1	0.1	109.5									
HCM LOS	F											
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	144	768	-	-	734	-	-	96	567			
HCM Lane V/C Ratio	0.895	0.01	-	-	0.009	-	-	0.081	0.067			
HCM Control Delay (s)	109.5	9.7	-	-	10	-	-	45.8	11.8			
HCM Lane LOS	F	A	-	-	A	-	-	E	B			
HCM 95th %ile Q(veh)	6.1	0	-	-	0	-	-	0.3	0.2			

Smoke Tree Resort
Existing PM


8: AJ's Drwy & Lincoln Dr
HCM 6th TWSC

Intersection	2.1											
Init Delay, s/veh	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Traffic Vol, veh/h	11	786	53	61	775	8	14	1	89	4	0	7
Future Vol, veh/h	11	786	53	61	775	8	14	1	89	4	0	7
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free											
RT Channelized	- - None											
Storage Length	25 - - - 25 - - - 0 - - - 0 - - - 0 - - - 0 - - - 0 - - - 0 - - -											
Veh in Median Storage, #	- - - 0 - - - 0 - - - 0 - - - 0 - - - 0 - - - 0 - - - 0 - - -											
Grade, %	- - - 0 - - - 0 - - - 0 - - - 0 - - - 0 - - - 0 - - - 0 - - -											
Peak Hour Factor	90 90 90 90 90 90 90 90 90 90 90 90 90											
Heavy Vehicles, %	2 2 2 2 2 2 2 2 2 2 2 2 2											
Mgmt Flow	12 873 59 68 861 9 16 1 99 4 0 8											
Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	870	0	0	932	0	0	1494	1933	466	1463	-	435
Stage 1	-	-	-	-	-	-	-	927	927	-	1002	-
Stage 2	-	-	-	-	-	-	-	567	1006	-	461	-
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	-	6.94
Critical Hdwy Slg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-
Critical Hdwy Slg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	-	3.32
Pl Cap-1 Maneuver	770	-	-	730	-	-	85	66	543	90	0	569
Stage 1	-	-	-	-	-	-	289	345	-	260	0	-
Stage 2	-	-	-	-	-	-	476	317	-	550	0	-
Platoon blocked, %	- - - - - - - - - - - - - - - -											
Mov Cap-1 Maneuver	770	-	-	730	-	-	77	58	543	67	-	569
Mov Cap-2 Maneuver	-	-	-	-	-	-	284	339	-	256	-	-
Stage 1	-	-	-	-	-	-	426	288	-	441	-	-
Stage 2	-	-	-	-	-	-	-	-	-	-	-	-
Approach	EB	WB	NB	WB	NB	SB						
HCM Control Delay, s	0.1	0.8	0.8	25.7	30	30						
HCM LOS	D	D	D	D	D	D						
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2	SBLn2		
Capacity (veh/h)	287	770	-	-	730	-	-	67	569			
HCM Lane V/C Ratio	0.403	0.016	-	-	0.093	-	-	0.066	0.014			
HCM Control Delay (s)	25.7	9.8	-	-	10.4	-	-	62.5	11.4			
HCM Lane LOS	D	A	-	-	B	-	-	F	B			
HCM 95th %ile Q(veh)	1.9	0	-	-	0.3	-	-	0.2	0			

Smoke Tree Resort
Existing PM

9: Scottsdale Rd & Lincoln Dr
Timings

	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Configurations	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Traffic Volume (vph)	461	54	385	54	60	373	1514	56	1461	449
Future Volume (vph)	461	54	385	54	60	373	1514	56	1461	449
Turn Type	Split	NA	pm+ov	Split	NA	Prot	NA	Prot	NA	pm+ov
Protected Phases	4	4	5	8	8	5	2	1	6	4
Permitted Phases										
Detector Phase	4	4	5	8	8	5	2	1	6	4
Switch Phase										
Minimum Initial (s)	7.0	7.0	7.0	7.0	7.0	7.0	10.0	5.0	10.0	7.0
Minimum Split (s)	13.0	13.0	13.0	13.0	13.0	13.0	16.7	11.0	16.0	13.0
Total Split (s)	30.0	30.0	30.0	30.0	30.0	30.0	73.0	14.0	57.0	30.0
Total Split (%)	23.1%	23.1%	23.1%	10.0%	10.0%	23.1%	56.2%	10.8%	43.8%	23.1%
Yellow Time (s)	4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0
All-Red Time (s)	1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5
Lead/Lag	Lead									
Lead-Lag Optimize?	None									
Recall Mode	None									
Act Effct Green (s)	23.9	23.9	43.7	7.3	7.3	19.9	71.1	7.7	56.6	86.2
Actuated g/C Ratio	0.18	0.18	0.34	0.06	0.06	0.15	0.55	0.06	0.44	0.66
v/C Ratio	0.93	0.91	0.74	0.61	0.86	0.79	0.62	0.60	0.73	0.46
Control Delay	88.8	85.1	29.5	84.9	38.1	64.2	22.3	82.1	33.6	9.9
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	88.8	85.1	29.5	84.9	38.1	64.2	22.3	82.1	33.6	9.9
LOS	F	F	C	F	D	E	C	F	C	A
Approach Delay	62.4									
Approach LOS	E									
Intersection Summary	Intersection LOS: D									
Cycle Length: 130										
Actuated Cycle Length: 130										
Offset: 0 (0%), Referenced to phase 6.SBT, Start of Green										
Natural Cycle: 90										
Control Type: Actuated-Coordinated										
Maximum v/C Ratio: 0.93										
Intersection Signal Delay: 36.6										
Intersection Capacity Utilization 71.5%										
Analysis Period (min) 15										

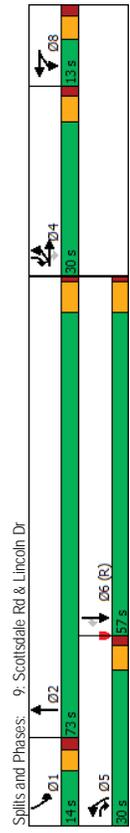

Smoke Tree Resort
Existing PM

9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (veh/h)	461	54	385	54	60	67	373	1514	44	56	1461	449
Future Volume (veh/h)	461	54	385	54	60	67	373	1514	44	56	1461	449
Initial Q (Q _{bb}), veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pb1)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No	No	No	No	No	No	No	No	No	No	No	No
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	555	0	428	60	67	74	414	1682	49	62	1623	499
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	671	0	516	101	101	90	473	2491	73	79	2015	924
Arrive On Green	0.19	0.00	0.19	0.06	0.06	0.06	0.14	0.49	0.49	0.04	0.39	0.39
Sat Flow, veh/h	3563	0	1585	1781	1777	1585	3456	5099	149	1781	5106	1585
Grp Volume(v), veh/h	555	0	428	60	67	74	414	1123	608	62	1623	499
Grp Sat Flow(s), veh/h	1781	0	1585	1781	1777	1585	1728	1702	1844	1781	1702	1585
Q Serve(g_s), s	19.5	0.0	24.5	4.3	4.8	6.0	15.3	32.7	32.7	4.5	36.7	24.9
Cycle Q Clear(g_c), s	19.5	0.0	24.5	4.3	4.8	6.0	15.3	32.7	32.7	4.5	36.7	24.9
Prop In Lane	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lane Grp Cap(c), veh/h	671	0	516	101	101	90	473	1663	901	79	2015	924
V/C Ratio(x)	0.83	0.00	0.83	0.59	0.66	0.82	0.87	0.68	0.68	0.78	0.81	0.54
Avail Cap(c_a), veh/h	671	0	516	101	101	90	651	1762	954	119	2015	924
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	50.7	0.0	40.5	59.8	60.1	60.6	55.0	25.4	25.4	61.5	34.9	16.5
Incr Delay (d2), s/veh	7.9	0.0	70.3	6.2	12.2	40.6	7.7	0.7	1.4	8.7	3.6	2.3
Initial Q Delay(Q3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%), veh/h	94	0.0	14.1	2.1	2.5	3.4	7.2	13.2	14.5	2.2	15.7	14.4
Unsig. Movement Delay, s/veh	58.6	0.0	50.8	66.0	72.3	101.2	62.7	26.1	26.7	70.2	38.5	18.8
LnGrp Delay(d), s/veh	E	A	D	E	E	F	E	C	C	E	D	B
LnGrp LOS	E	A	D	E	E	F	E	C	C	E	D	B
Approach Vol, veh/h	983			201			2145				2184	
Approach Delay, s/veh	55.2			81.1			33.4				34.9	
Approach LOS	E			F			C				C	
Timer - Assigned Phs	1	2	2	4	5	6	8					
Phs Duration (G+Y+Rc), s	11.1	69.2	30.0	23.3	57.0	13.0						
Change Period (Y+Rc), s	* 5.3	5.7	5.5	5.5	5.7	5.6						
Max Green Setting (Gmax), s	* 8.7	67.3	24.5	24.5	51.3	7.4						
Max Q Clear Time (g_c+I1), s	6.5	34.7	26.5	17.3	38.7	8.0						
Green Ext Time (g_e), s	0.0	2.7	0.0	0.0	0.5	2.6						
Intersection Summary												
HCM 6th Ctrl Delay	39.6											
HCM 6th LOS	D											
Notes												
User approved pedestrian interval to be less than phase max green.												
User approved volume balancing among the lanes for turning movement.												
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.												

APPENDIX D

TRIP GENERATION

Smoke Tree Resort

Proposed

Trip Generation

February 2019

Appendix D

Methodology Overview

This form facilitates trip generation estimation using data within the Institute of Transportation Engineer's (ITE) *Trip Generation Manual*, 10th Edition and methodology described within ITE's *Trip Generation Handbook*, 3rd Edition. These references will be referred to as *Manual and Handbook*, respectively. The *Manual* contains data collected by various transportation professionals for a wide range of different land uses, with each land use category represented by a land use code (LUC). Average rates and equations have been established that correlate the relationship between an independent variable that describes the development size and generated trips for each categorized LUC in various settings and time periods. The *Handbook* indicates an established methodology for how to use data contained within the Manual when to use the fitted curve instead of the average rate and when to adjustments to the volume of trips are appropriate and how to do so. The methodology steps are represented visually in boxes in Figure 3.1. This worksheet applies calculations for each box if applicable.

Box 1 - Define Study Site Land Use Type & Site Characteristics

The analyst is to pick an appropriate LUC(s) based on the subject's zoning/land use(s)/future land use(s). The size of the land use(s) is described in reference to an independent variable(s) specific to (each) the land use (example: 1,000 square feet of building area is relatively common).

Land Use Types and Size

Proposed Use	Amount Units	ITE LUC	ITE Land Use Name
Hotel and Lock-off Units	135 Rooms	310/330	Standard Hotel/Resort Hotel
Residential Units	30 Dwelling Units	220	Multifamily Housing (Low-Rise)
Quality Restaurant	3.500 1,000 square feet	931	Quality Restaurant

Box 2 - Define Site Context

Context assessment is to "simply determine whether the study sites is in a multimodal setting" and "could have persons accessing the site by walking, bicycling, or riding transit." This assessment is used in Box 4. The *Manual* separates data into 4 setting categories - **Rural**, **General Urban/Suburban**, **Dense Multi-Urban Use** and **Center City Core**. This worksheet uses the following abbreviations, respectively: **R**, **G**, **D**, and **C**. The *Manual* does not have data for all settings of all land use codes. See the table on the next page titled "Site Context and Time Periods" - if this table is not provided, the "General Urban/Suburban" setting is used by default.

Box 3 - Define Analysis Objectives Types of Trips & Time Period

This tool will focus on vehicular trips for a 24-hour period on a typical weekday as well as its AM peak hour and PM peak hour. Other time period(s) may be of interest.

Smoke Tree Resort

Proposed

Trip Generation

February 2019

Appendix D

Box 4 - Is Study Site Multimodal?

Per the Handbook, "if the objective is to establish a local trip generation rate for a particular land use or study site, the simplified approach (Box 9) may be acceptable but the *Box 5 through 8* approach is required if the study site is located in an infill setting, contains a mix of uses on-site, or is near significant transit service."

Box 5/Box 9 - Estimate Baseline Trips/Estimate Vehicular Trips (Determine Equation)

Vehicle trips are estimated using rates/equations applicable to each LUC. When the appropriate graph has a fitted curve, the *Handbook* has a process (Figure 4.2) to determine when to use it versus using the weighted average rate or collecting local data. The methodology requires for engineering judgement in some circumstances and permits engineering judgement to override or make adjustments when appropriate to best project (example 1: study site is expected to operate differently than data in the applicable land use code - such as restaurant that is closed in the morning or in the evening; example 2: LUC data in a localized area fails to be represented by the typically selected fitted curve/weighted average rate - a small shop/LUC 820, AM peak hour is skewed by the high y-intercept).

Equation Type: Equation Used [Equated Rate] (Type Abbreviations: Weighted Average Rate ("WA"), Fitted Curve ("FC"), or Custom ("C"))

Proposed Use	ADT	AM Peak Hour	PM Peak Hour	(not used)
Hotel and Lock-off Units	WA: []	FC: $T=0.38 \cdot X - 28.58$ [0.17]	FC: $T=0.52 \cdot X - 55.42$ [0.11]	
Residential Units	FC: $T=7.56 \cdot X - 40.86$ [6.20]	FC: $\text{LN}(T)=0.95 \cdot \text{LN}(X) - 0.51$ [0.51]	FC: $\text{LN}(T)=0.89 \cdot \text{LN}(X) - 0.02$ [0.67]	
Quality Restaurant	WA: $T=X \cdot 83.84$ [83.84]	WA: $T=X \cdot 0.73$ [0.73]	WA: $T=X \cdot 7.8$ [7.80]	

Box 5/Box 9 - Estimate Baseline Trips/Estimate Vehicular Trips (Apply Equations and in/out Distributions)

Baseline Vehicular Trips

Proposed Use	ADT				AM Peak Hour				PM Peak Hour				(not used)
	% In	In	Out	Total	% In	In	Out	Total	% In	In	Out	Total	
Hotel and Lock-off Units	50%	350	350	700	72%	38	15	53	43%	29	39	68	
Residential Units	50%	93	93	186	23%	3	12	15	63%	13	7	20	
Quality Restaurant	50%	147	147	294	0%	0	3	3	67%	18	9	27	
Totals		590	590	1,180		41	30	71		60	55	115	



Box 6 - Convert Baseline Vehicle Trips to Person Trips

If no vehicle trip reductions are to be applied, this portion may be ignored. The *Handbook* states "There are not enough samples to derive precise percentages by mode...however, for all but one, ...the motor vehicle percentage of total person trips is at least 96 percent." and "[vehicle occupancy for] many of the most commonly analyzed land use codes are not [available]." This form assumes that the total baseline vehicle trips for all land use codes accounts for 90% of total person trips. Unless otherwise specified, this form later reverses the conversion in Box 8.

Box 7 - Estimate Internal Person Trips, External Walk/Bike Trips, Transit Person Trips, External Person Trips (Internal Capture)

Internal capture occurs for mixed-use developments when a portion of the trips generated by the site are expected to have the both the origin and destination within the site. Internal capture is not dependent on mode choice. The table below presents the internal capture percentages and trips in units of vehicle trips. CivTech can provide trips in units of persons if requested.

Adjustments for Internal Trips

Proposed Use	ADT			AM Peak Hour			PM Peak Hour			(not used)			
	Percent	In	Out	Total	Percent	In	Out	Total	Percent		In	Out	Total
Hotel and Lock-off Units	0%	0	0	0	0%	0	0	0	0%	0	0	0	
Residential Units	0%	0	0	0	0%	0	0	0	0%	0	0	0	
Quality Restaurant	50%	74	74	148	50%	0	2	2	50%	9	5	14	
Totals		74	74	148		0	2	2		9	5	14	

Box 8 - Convert Person Trips to Final Vehicle Trips

The vehicle occupancy and baseline alternate mode are now factored out from the external trips in vehicles, after any adjustments for internal capture and additional alternate mode from Box 7. In Box 6, vehicle trips were considered to account for 90% of total person trips. Alternate mode trips in addition to the baseline, if any, are accounted for in Box 7. It is estimated that vehicle trips should be reduced by an additional 0% due to carpooling. The final external trips in vehicles is multiplied by $90\% - 0\% = 90\%$ to produce the external vehicle trips.

External Vehicular Trips

Proposed Use	ADT			AM Peak Hour			PM Peak Hour			(not used)
	In	Out	Total	In	Out	Total	In	Out	Total	
Totals	516	516	1,032	41	28	69	51	50	101	

Box 10 - Estimate Vehicle Trip Subsets Pass-by/Diverted Trips, Truck Trips (Pass-By Trips)

Some trips may be classified as "pass-by" trips, where some vehicle trips generated by the study site are already traveling on an adjacent road and make a stop while passing by. These trips do not add traffic volume to the roadway. The *Handbook* does not specify that a 'pair' of pass-by trips must enter and exit the same driveway. The current edition of the *Handbook* indicates that pass-by trips should have directional distribution applied (%in/%out), though reviewers often comment when pass-by trip "pairs" do not occur within a the specified time period. This is likely due to ease of calculation and traditional methodology found in the first edition of the *Handbook*. As such, the analyst may ignore the direction distribution divide the total pass-by trip volume by 2 to apply pass-by "pairs". In addition, the analyst may consider pass-by rates at a reduced rate. Data is not available for all land use codes and all periods, assumptions are highlighted. The percentage is applied to total external vehicle trips.

APPENDIX E

TRIP DISTRIBUTION


Quadrant	2020		2030	
	Population	Percent	Population	Percent
North Northwest	65,355	13.6%	70,346	13.6%
North Northeast	46,994	9.8%	50,587	9.8%
North	112,348	23.4%	120,934	23.4%
East Northeast	49,891	10.4%	52,124	10.1%
East Southeast	14,233	3.0%	14,712	2.8%
East	64,123	13.4%	66,836	12.9%
South Southeast	81,730	17.0%	92,480	17.8%
South Southwest	92,361	19.2%	99,928	19.3%
South	174,091	36.2%	192,407	37.1%
West Southwest	69,372	14.4%	74,834	14.4%
West Northwest	60,317	12.6%	63,387	12.2%
West	129,689	27.0%	138,221	26.6%
Totals	480,252	100.0%	518,398	100.0%

Radius

Population radius: 10 miles

Select Analysis Year (2020, 2030, 2040,2050)

2020

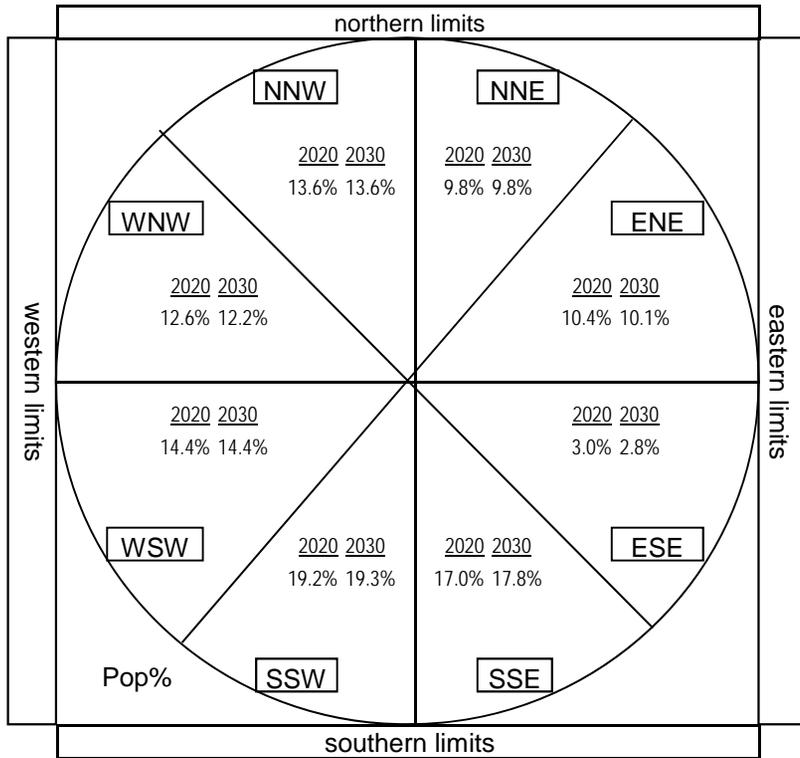

APPENDIX F

BACKGROUND TRAFFIC

Location of counts: Scottsdale Road between Indian Bend and Lincoln


Source(s): <https://www.scottsdaleaz.gov/transportation/studies-reports/traffic-volume>

	Year	Volume	Avg Growth Rate to 2012	Expansion Factor to 2012
Beginning	2012	43,500		
End	2014	45,000	1.7%	0.967


Growth Rate Used 1.7%
 Per-Year Multiplier 1.017

Year	Expansion Factor(s)
2018	1.000
2019	1.017
2020	1.034 <- Expansion factor to opening
2021	1.052
2022	1.070
2023	1.088
2024	1.106
2025	1.125 <- Expansion factor to 5 years after opening
2026	1.144
2027	1.164
2028	1.184
2029	1.204
2030	1.224
2031	1.245
2032	1.266
2033	1.288
2034	1.310
2035	1.332
2036	1.354
2037	1.378
2038	1.401


Lincoln medical site

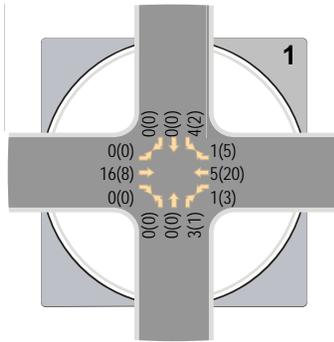


Mockingbird Lane & Lincoln Dr

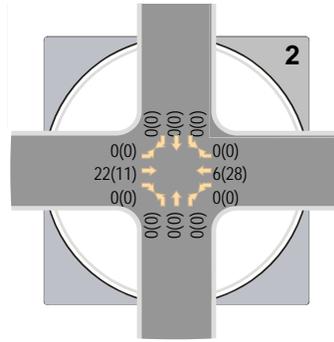


Quail Run Rd & Lincoln Dr

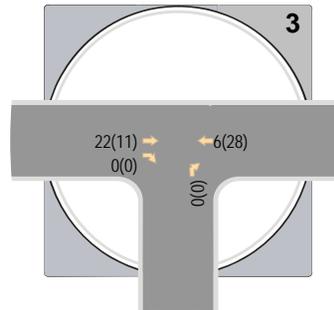


Smoke Tree Drwy West & Lincoln Dr

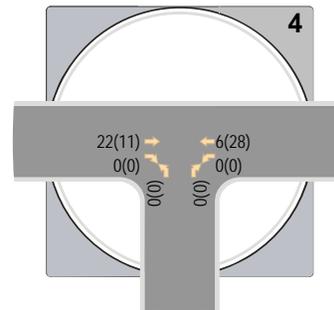


Smoke Tree Drwy East & Lincoln Dr

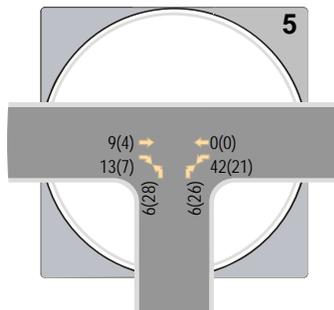


Medical Drwy West & Lincoln Dr

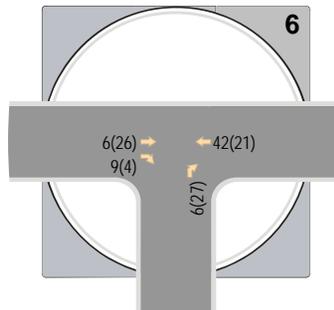


Medical Drwy East & Lincoln Dr

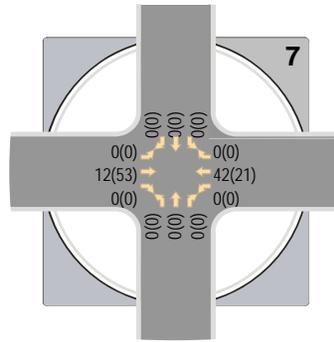


Apartment Drwy & Lincoln Dr

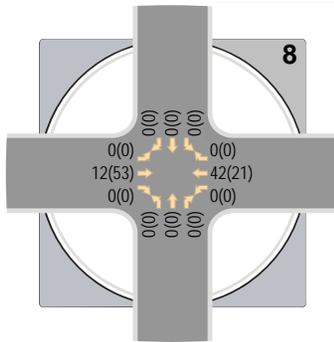

AJ's Drwy & Lincoln Dr

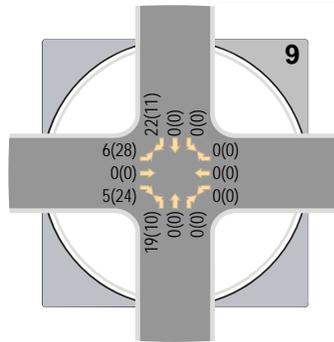

Scottsdale Rd & Lincoln Dr

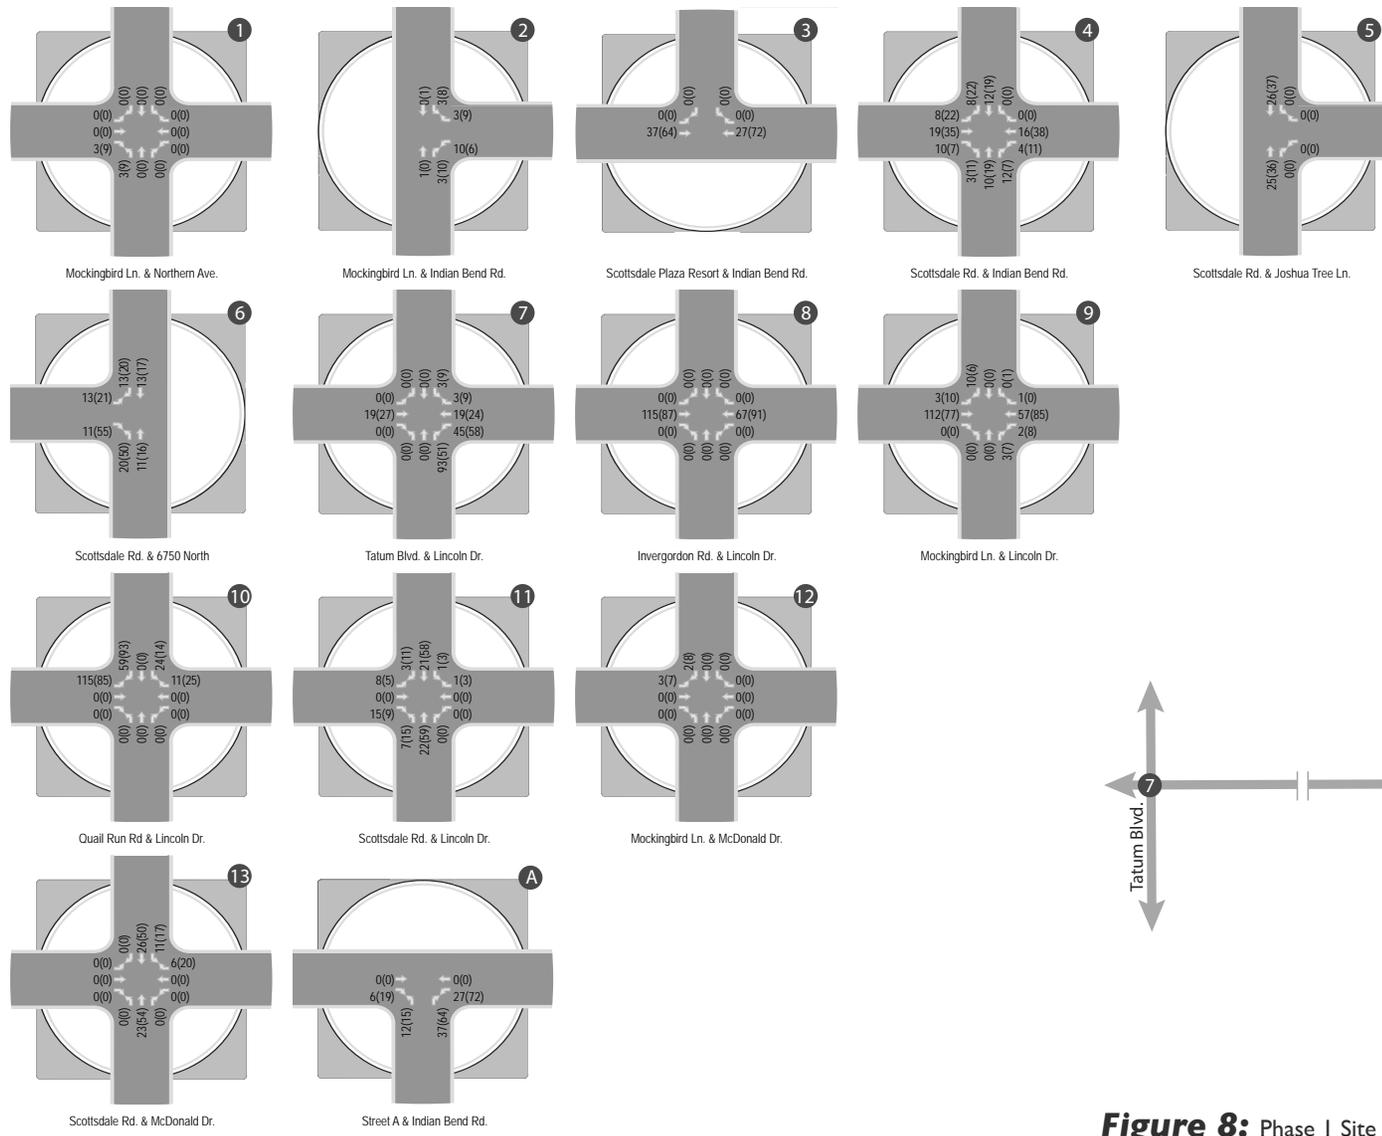

LEGEND
 XX(YY) - AM(PM) Peak Hour Traffic Volumes

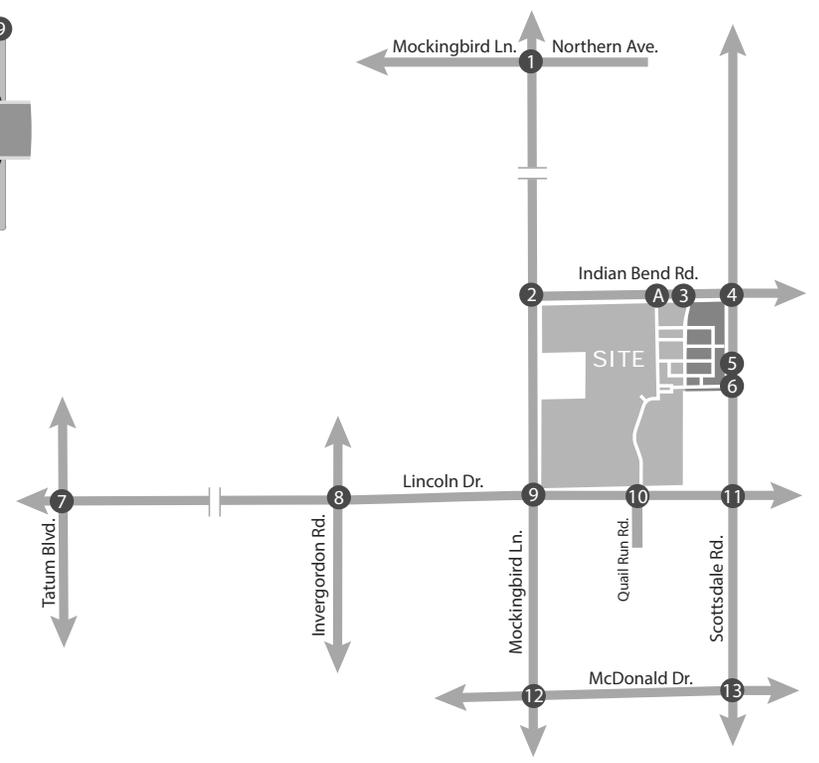


Figure 8: Phase I Site Generated Traffic Volumes without Palmeraie Access A


APPENDIX G

2020 PEAK HOUR ANALYSIS

Smoke Tree Resort
2020 Background AM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL
Lane Configurations	222	971	23	890	5	34	76
Traffic Volume (vph)	222	971	23	890	5	34	76
Future Volume (vph)	pm+pt	NA	Perm	NA	pm+pt	NA	NA
Turn Type	1	6	2	2	4	3	8
Protected Phases	6	2	2	4	4	3	8
Permitted Phases	1	6	2	2	4	4	3
Detector Phase							
Switch Phase							
Minimum Initial (s)	3.5	15.0	15.0	7.0	7.0	3.5	7.0
Minimum Split (s)	8.0	27.0	27.0	33.5	33.5	8.0	33.5
Total Split (s)	27.0	77.0	50.0	50.0	44.0	9.0	53.0
Total Split (%)	20.8%	59.2%	38.5%	38.5%	33.8%	6.9%	40.8%
Yellow Time (s)	3.0	4.5	4.5	4.0	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	2.5	2.5	1.0	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.5	6.5	4.0	6.5
Lead/Lag	Lead	Lag	Lag	Lag	Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	93.3	91.3	70.1	17.4	17.4	28.7	26.2
Actuated g/C Ratio	0.72	0.70	0.54	0.13	0.13	0.22	0.20
v/c Ratio	0.57	0.45	0.10	0.55	0.08	0.24	0.30
Control Delay	13.0	10.1	18.3	25.3	46.2	32.4	41.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	13.0	10.1	18.3	25.3	46.2	32.4	41.8
LOS	B	B	B	C	D	C	D
Approach Delay	10.6	10.6	25.1	33.7	33.7	48.6	48.6
Approach LOS	B	B	C	C	C	D	D
Intersection Summary							
Cycle Length: 130							
Actuated Cycle Length: 130							
Offset: 0 (0%), Referenced to phase 2:WBT, and 6:EBT, Start of Green							
Natural Cycle: 90							
Control Type: Actuated-Coordinated							
Maximum v/c Ratio: 0.84							
Intersection Signal Delay: 22.1							
Intersection Capacity Utilization 74.7%							
Analysis Period (min) 15							

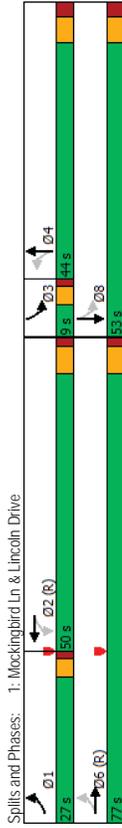

Smoke Tree Resort
2020 Background AM


1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	222	971	30	23	890	42	5	34	22	76	88	233
Traffic Volume (veh/h)	222	971	30	23	890	42	5	34	22	76	88	233
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0	0	0	0
Initial Q (Obs.) veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pbT)	No											
Work Zone On Approach	No											
Adj Sat Flow (veh/h)	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	247	1079	33	26	989	47	6	38	24	84	98	259
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh. %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	397	2334	71	316	1919	91	88	184	116	313	109	289
Arrive On Green	0.08	0.66	0.66	0.56	0.56	0.56	0.17	0.17	0.17	0.04	0.24	0.24
Sat Flow, veh/h	1781	3520	108	507	3454	164	1024	1072	677	1781	454	1200
Grp Volume(v), veh/h	247	545	567	26	509	527	6	6	62	84	0	357
Grp Sat Flow(s),veh/h	1781	1777	1851	507	1777	1841	1024	0	1749	1781	0	1654
Cycle O Clear(g_c), s	7.4	19.4	19.4	3.4	23.2	23.2	23.2	18.9	4.0	5.0	0.0	27.2
Prop In Lane	1.00	0.06	1.00	1.00	0.09	1.00	0.09	1.00	0.39	1.00	0.73	0.73
VC Ratio(X)	397	1178	1227	316	987	1023	88	0	300	313	0	398
Avail Cap(c_a), veh/h	576	1178	1227	316	987	1023	208	0	504	313	0	592
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(0)	1.00	1.00	1.00	0.56	0.56	0.56	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	13.8	10.6	10.6	16.2	18.0	18.0	61.3	0.0	46.2	41.1	0.0	47.8
Incr Delay (d2), s/veh	1.6	1.3	1.3	0.3	1.1	1.0	0.3	0.0	0.3	0.5	0.0	11.7
Initial Q Delay(g3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackQ(50%),veh/m	3.0	7.7	8.0	0.4	9.7	10.0	0.2	0.0	1.8	2.2	0.0	12.5
Unsig. Movement Delay, s/veh	15.4	12.0	11.9	16.5	19.1	19.0	61.6	0.0	46.6	41.5	0.0	59.5
LnGrp Delay(d)S/veh	B	B	B	B	B	B	E	A	D	D	A	E
LnGrp LOS	B	B	B	B	B	B	E	A	D	D	A	E
Approach Vol. veh/h	1359	1062	1062	19.0	47.9	47.9	68	441	56.1	56.1	441	56.1
Approach Delay, s/veh	12.6	19.0	19.0	19.0	19.0	19.0	47.9	47.9	47.9	47.9	47.9	47.9
Approach LOS	B	B	B	B	B	B	D	D	D	D	D	E
Timer - Assigned Phs	1	2	3	4	6	8	8	8	8	8	8	8
Phs Duration (G+Y+Rc), s	14.0	78.2	9.0	28.8	92.2	37.8	37.8	37.8	37.8	37.8	37.8	37.8
Change Period (Y+Rc), s	4.0	6.0	4.0	6.5	6.0	6.5	6.5	6.5	6.5	6.5	6.5	6.5
Max Green Selling (Gmax), s	23.0	44.0	5.0	37.5	71.0	46.5	46.5	46.5	46.5	46.5	46.5	46.5
Max Q Clear Time (g_c+I1), s	9.4	25.2	7.0	20.9	21.4	29.2	29.2	29.2	29.2	29.2	29.2	29.2
Green Ext Time (g_e), s	0.6	7.1	0.0	0.2	9.8	2.2	2.2	2.2	2.2	2.2	2.2	2.2
Intersection Summary												
HCM 6th Ctrl Delay	22.3											
HCM 6th LOS	C											

Smoke Tree Resort
2020 Background AM

2: Quail Run Rd & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	WBL	WBT	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBT	SBL	SBT
Lane Configurations	115	1017	2	853	0	26	0
Traffic Volume (vph)	115	1017	2	853	0	26	0
Future Volume (vph)	pm-plt	NA	Perm	NA	NA	Perm	NA
Turn Type	7	4	8	8	2	6	6
Protected Phases	4	8	8	8	2	6	6
Permitted Phases	7	4	8	8	2	6	6
Detector Phase	3.5	15.0	15.0	15.0	7.0	7.0	7.0
Switch Phase	8.0	28.0	28.0	28.0	33.0	33.0	33.0
Minimum Initial (s)	20.0	94.0	74.0	74.0	36.0	36.0	36.0
Minimum Split (s)	15.4%	72.3%	56.9%	56.9%	27.7%	27.7%	27.7%
Total Split (%)	3.0	4.0	4.0	4.0	4.5	4.5	4.5
Yellow Time (s)	1.0	2.5	2.5	2.5	1.5	1.5	1.5
All-Red Time (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lost Time Adjust (s)	4.0	6.5	6.5	6.5	6.0	6.0	6.0
Total Lost Time (s)	Lead	Lag	Lag	Lag			
Lead/Lag	Yes	Yes	Yes	Yes			
Lead-Lag Optimize?	None	None	None	None	C-Max	C-Max	C-Max
Recall Mode	64.0	61.5	46.2	46.2	56.0	56.0	56.0
Act Effct Green (s)	0.49	0.47	0.36	0.36	0.43	0.43	0.43
Actuated g/C Ratio	0.53	0.68	0.02	0.76	0.01	0.05	0.09
v/c Ratio	29.9	35.8	23.5	40.9	0.0	26.1	0.2
Control Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Queue Delay	29.9	35.8	23.5	40.9	0.0	26.1	0.2
Total Delay	C	D	C	D	A	C	A
LOS	35.2	D	D	D	A	A	A
Approach Delay	Intersection Summary						
Approach LOS	Cycle Length: 130						
	Actuated Cycle Length: 130						
	Offset: 0 (0%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green						
	Natural Cycle: 70						
	Control Type: Actuated-Coordinated						
	Maximum v/c Ratio: 0.76						
	Intersection Signal Delay: 36.2						
	Intersection Capacity Utilization 64.6%						
	Analysis Period (min) 15						

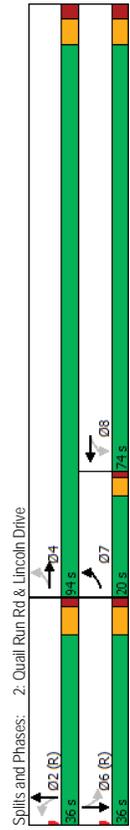

Smoke Tree Resort
2020 Background AM

2: Quail Run Rd & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Movement	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Configurations	115	1017	3	2	853	12	0	7	26
Traffic Volume (veh/h)	115	1017	3	2	853	12	0	7	26
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0
Initial Q (Qb), veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pbT)	No	No	No	No	No	No	No	No	No
Work Zone On Approach	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Sat Flow, veh/h	128	1130	3	2	948	13	0	8	29
Adj Flow Rate, veh/h	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Peak Hour Factor	2	2	2	2	2	2	2	2	2
Percent Heavy Veh, %	210	1517	4	195	1161	16	0	771	737
Cap, veh/h	0.13	0.83	0.83	0.22	0.22	0.00	0.00	0.49	0.00
Arrive On Green	1781	3636	10	497	3589	49	0	1885	1407
Sat Flow, veh/h	128	552	581	2	469	492	0	8	29
Grp Volume(v), veh/h	1781	1777	1869	497	1777	1862	0	1585	1407
Grp Sat Flow(s), veh/h	6.1	17.7	17.7	0.4	32.7	32.7	0.0	0.3	1.4
Q Serve(g_s), s	6.1	17.7	17.7	5.9	32.7	32.7	0.0	0.3	1.7
Cycle Q Clear(g_c), s	1.00	0.01	1.00	0.03	0.03	0.00	1.00	1.00	1.00
Prop In Lane	210	741	780	195	575	602	0	771	737
Lane Grp Cap(c), veh/h	0.61	0.74	0.74	0.01	0.82	0.82	0.00	0.01	0.04
VC Ratio(x)	317	1196	1258	292	923	967	0	771	737
Avail Cap(c_a), veh/h	2.00	2.00	2.00	0.67	0.67	1.00	1.00	1.00	1.00
HCM Platoon Ratio	0.90	0.90	0.90	1.00	1.00	1.00	0.00	1.00	1.00
Upstream Filter(i)	28.8	7.7	7.7	39.0	47.2	47.2	0.0	17.2	17.7
Uniform Delay (d), s/veh	2.6	1.4	1.3	0.0	3.1	2.9	0.0	0.0	0.1
Incr Delay (d2), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Initial Q Delay(Q3), s/veh	2.5	3.4	3.6	0.1	15.5	16.2	0.0	0.1	0.5
%ile BackOfQ(50%), veh/h	Unsig. Movement Delay, s/veh								
Unsig. Movement Delay, s/veh	31.4	9.1	9.0	39.0	50.3	50.2	0.0	17.2	17.8
LnGrp Delay(d) s/veh	C	A	A	D	D	D	A	A	B
LnGrp LOS	1261	963	8	101	18.1	B	B	B	B
Approach Vol, veh/h	11.3	50.2	17.2	8	8	8	8	8	8
Approach Delay, s/veh	69.3	60.7	69.3	12.2	48.6	6.0	6.5	4.0	6.5
Approach LOS	30.0	87.5	30.0	16.0	67.5	2.3	19.7	5.2	8.1
Timer - Assigned Phs	2	4	6	7	8	2.3	19.7	5.2	8.1
Phs Duration (G+Y+Rc), s	0.0	10.3	0.4	0.2	7.4	0.0	10.3	0.4	0.2
Change Period (Y+Rc), s	Intersection Summary								
Max Green Setting (Gmax), s	HCM 6th Ctrl Delay								
Max Q Clear Time (g_c+I1), s	27.7								
Green Ext Time (g_e), s	C								

3: Smole Tree West & Lincoln Dr
HCM 6th TWSC

Smoke Tree Resort
2020 Background AM

Intersection	Init Delay, s/veh									
	0									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↔	↔	↔	↔	↔	↔				
Traffic Vol, veh/h	1047	2	0	863	0	0				
Future Vol, veh/h	1047	2	0	863	0	0				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	-	0	0				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	1163	2	0	959	0	0				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	1165	0	1644	583				
Stage 1	-	-	-	-	1164	-				
Stage 2	-	-	-	-	480	-				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	595	-	90	456				
Stage 1	-	-	-	-	259	-				
Stage 2	-	-	-	-	588	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	595	-	90	456				
Mov Cap-2 Maneuver	-	-	-	-	197	-				
Stage 1	-	-	-	-	259	-				
Stage 2	-	-	-	-	588	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0	0							
HCM LOS				A						
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	-	-	-	-	595					
HCM Lane V/C Ratio	-	-	-	-	-					
HCM Control Delay (s)	0	-	-	0	-					
HCM Lane LOS	A	-	-	A	-					
HCM 95th %tile Q(veh)	-	-	-	0	-					

4: Smoke Tree East & Lincoln Dr
HCM 6th TWSC

Smoke Tree Resort
2020 Background AM

Intersection	Init Delay, s/veh									
	0.1									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↔	↔	↔	↔	↔	↔				
Traffic Vol, veh/h	1049	0	1	860	5	2				
Future Vol, veh/h	1049	0	1	860	5	2				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	-	0	0				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	1166	0	1	956	6	2				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	1166	0	1646	583				
Stage 1	-	-	-	-	1166	-				
Stage 2	-	-	-	-	480	-				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	595	-	90	456				
Stage 1	-	-	-	-	259	-				
Stage 2	-	-	-	-	588	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	595	-	90	456				
Mov Cap-2 Maneuver	-	-	-	-	197	-				
Stage 1	-	-	-	-	258	-				
Stage 2	-	-	-	-	588	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0	0							
HCM LOS				C						
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	235	-	-	-	595					
HCM Lane V/C Ratio	0.033	-	-	0.002	-					
HCM Control Delay (s)	20.8	-	-	11.1	-					
HCM Lane LOS	C	-	-	B	-					
HCM 95th %tile Q(veh)	0.1	-	-	0	-					

Smoke Tree Resort
2020 Background AM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	EBT	EBR	WBL	WBT	NBL	NBR
Int Delay, s/veh	0.4					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↑	↑↑	↑↑	↑	↑↑
Traffic Vol, veh/h	1034	17	42	854	6	9
Future Vol, veh/h	1034	17	42	854	6	9
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	25	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1149	19	47	949	7	10
Major/Minor	Major1	Major2	Minor1		Minor1	
Conflicting Flow All	0	0	1168	0	1728	584
Stage 1	-	-	-	-	1159	-
Stage 2	-	-	-	-	-	569
Critical Hdwy	-	-	4.14	-	6.84	6.94
Critical Hdwy Stg 1	-	-	-	-	5.84	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-
Follow-up Hdwy	-	-	2.22	-	3.52	3.32
Pot Cap-1 Maneuver	-	-	594	-	79	455
Stage 1	-	-	-	-	261	-
Stage 2	-	-	-	-	-	530
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	594	-	73	455
Mov Cap-2 Maneuver	-	-	-	-	175	-
Stage 1	-	-	-	-	240	-
Stage 2	-	-	-	-	-	530
Approach	EB	WB	NB		NB	
HCM Control Delay, s	0	0.5	18.8		18.8	
HCM LOS	C					
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	WBT
Capacity (veh/h)	277	-	-	-	594	-
HCM Lane V/C Ratio	0.06	-	-	-	0.079	-
HCM Control Delay (s)	18.8	-	-	-	11.6	-
HCM Lane LOS	C	-	-	-	B	-
HCM 95th %ile Q(veh)	0.2	-	-	-	0.3	-

Smoke Tree Resort
2020 Background AM

6: Lincoln Medical East & Lincoln Dr
HCM 6th TWSC

Intersection	EBT	EBR	WBL	WBT	NBL	NBR
Int Delay, s/veh	0.1					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↑	↑↑	↑↑	↑	↑↑
Traffic Vol, veh/h	1030	11	5	896	0	9
Future Vol, veh/h	1030	11	5	896	0	9
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	25	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1144	12	6	996	0	10
Major/Minor	Major1	Major2	Minor1		Minor1	
Conflicting Flow All	0	0	1156	0	1660	578
Stage 1	-	-	-	-	1150	-
Stage 2	-	-	-	-	-	510
Critical Hdwy	-	-	4.14	-	6.84	6.94
Critical Hdwy Stg 1	-	-	-	-	5.84	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-
Follow-up Hdwy	-	-	2.22	-	3.52	3.32
Pot Cap-1 Maneuver	-	-	600	-	88	459
Stage 1	-	-	-	-	264	-
Stage 2	-	-	-	-	-	568
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	600	-	87	459
Mov Cap-2 Maneuver	-	-	-	-	196	-
Stage 1	-	-	-	-	261	-
Stage 2	-	-	-	-	-	568
Approach	EB	WB	NB		NB	
HCM Control Delay, s	0	0.1	13		13	
HCM LOS	B					
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	WBT
Capacity (veh/h)	459	-	-	-	600	-
HCM Lane V/C Ratio	0.022	-	-	-	0.009	-
HCM Control Delay (s)	13	-	-	-	11.1	-
HCM Lane LOS	B	-	-	-	B	-
HCM 95th %ile Q(veh)	0.1	-	-	-	0	-

Smoke Tree Resort
2020 Background AM

7: Apartment Drwy & Lincoln Dr
HCM 6th TWSC

Intersection													
Init Delay, s/veh													
9.2													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	27	979	35	19	836	10	52	0	30	5	0	12	
Future Vol, veh/h	27	979	35	19	836	10	52	0	30	5	0	12	
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Stop
RT Channelized	-	-	-	-	-	-	-	-	-	-	-	-	None
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	0
Veh in Median Storage, #	-	0	-	-	0	-	-	-	0	-	-	-	0
Grade, %	-	0	-	-	0	-	-	-	0	-	-	-	0
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	30	1088	39	21	929	11	58	0	33	6	0	13	
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	940	0	0	1127	0	0	1675	2150	564	1581	-	470	
Stage 1	-	-	-	-	-	-	1168	1168	-	977	-	-	
Stage 2	-	-	-	-	-	-	507	982	-	604	-	-	
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	-	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	-	3.32	
Pot Cap-1 Maneuver	725	-	-	616	-	-	62	48	469	73	0	540	
Stage 1	-	-	-	-	-	-	206	266	-	269	0	-	
Stage 2	-	-	-	-	-	-	516	325	-	452	0	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	725	-	-	616	-	-	-57	44	469	64	-	540	
Mov Cap-2 Maneuver	-	-	-	-	-	-	-57	44	-	64	-	-	
Stage 1	-	-	-	-	-	-	198	255	-	258	-	-	
Stage 2	-	-	-	-	-	-	486	314	-	403	-	-	
Approach	EB	WB	NB	SB									
HCM Control Delay, s	0.3	0.2	212.8	27.9									
HCM LOS	F				D								
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	84	725	-	-	616	-	-	64	540				
HCM Lane V/C Ratio	1.085	0.041	-	-	0.034	-	-	0.087	0.025				
HCM Control Delay (s)	212.8	10.2	-	-	11.1	-	-	66.5	11.8				
HCM Lane LOS	F	B	-	-	B	-	-	F	B				
HCM 95th %ile Q(veh)	6.3	0.1	-	-	0.1	-	-	0.3	0.1				

Notes
- Volume exceeds capacity \$: Delay exceeds 300s +: Computation Not Defined *: All major volume in platoon

Smoke Tree Resort
2020 Background AM


8: AJ's Drwy & Lincoln Dr
HCM 6th TWSC

Intersection													
Init Delay, s/veh													
1.1													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	3	958	55	44	848	8	6	0	42	4	1	12	
Future Vol, veh/h	3	958	55	44	848	8	6	0	42	4	1	12	
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Stop
RT Channelized	-	-	-	-	-	-	-	-	-	-	-	-	None
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	0
Veh in Median Storage, #	-	0	-	-	0	-	-	-	0	-	-	-	0
Grade, %	-	0	-	-	0	-	-	-	0	-	-	-	0
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	3	1064	61	49	942	9	7	0	47	4	1	13	
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	951	0	0	1125	0	0	1671	2150	563	1583	2176	476	
Stage 1	-	-	-	-	-	-	1101	1101	-	1045	-	-	
Stage 2	-	-	-	-	-	-	570	1049	-	538	-	-	
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	-	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	-	3.32	
Pot Cap-1 Maneuver	718	-	-	617	-	-	63	48	470	73	46	535	
Stage 1	-	-	-	-	-	-	226	286	-	245	304	-	
Stage 2	-	-	-	-	-	-	474	303	-	495	277	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	718	-	-	617	-	-	56	44	470	62	42	535	
Mov Cap-2 Maneuver	-	-	-	-	-	-	56	44	-	62	42	-	
Stage 1	-	-	-	-	-	-	225	285	-	244	280	-	
Stage 2	-	-	-	-	-	-	424	279	-	444	276	-	
Approach	EB	WB	NB	SB									
HCM Control Delay, s	0	0.6	23.8	25.8									
HCM LOS	C				D								
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	244	718	-	-	617	-	-	62	535				
HCM Lane V/C Ratio	0.219	0.005	-	-	0.079	-	-	0.072	0.025				
HCM Control Delay (s)	23.8	10	-	-	11.3	-	-	67.5	11.9				
HCM Lane LOS	C	B	-	-	B	-	-	F	B				
HCM 95th %ile Q(veh)	0.8	0	-	-	0.3	-	-	0.2	0.1				

Smoke Tree Resort
2020 Background PM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Traffic Volume (vph)	246	875	23	937	7	62	62
Future Volume (vph)	246	875	23	937	7	62	62
Turn Type	pm-plt	NA	Perm	NA	pm+plt	NA	NA
Protected Phases	1	6	2	2	4	3	8
Permitted Phases	6	2	2	4	4	3	8
Detector Phase	1	6	2	2	4	4	3
Switch Phase							
Minimum Initial (s)	3.5	15.0	15.0	7.0	7.0	3.5	7.0
Minimum Split (s)	8.0	27.0	27.0	33.5	33.5	8.0	33.5
Total Split (s)	27.0	77.0	50.0	50.0	44.0	9.0	53.0
Total Split (%)	20.8%	59.2%	38.5%	38.8%	33.8%	6.9%	40.8%
Yellow Time (s)	3.0	4.5	4.5	4.0	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	2.5	2.5	1.0	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.5	6.5	4.0	6.5
Lead/Lag	Lead	Lag	Lag	Lag	Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	101.1	99.1	76.2	76.2	11.2	20.9	18.4
Actuated g/C Ratio	0.78	0.76	0.59	0.59	0.09	0.16	0.14
v/c Ratio	0.98	0.37	0.08	0.54	0.09	0.37	0.64
Control Delay	11.3	6.1	10.2	19.4	54.9	61.4	27.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.3	6.1	10.2	19.4	54.9	61.4	27.7
LOS	B	A	B	D	E	D	C
Approach Delay	7.2	19.2	19.2	60.8	33.2		
Approach LOS	A	B	B	E	C		

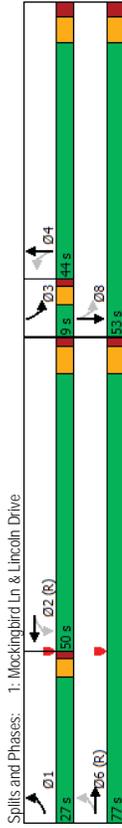

Smoke Tree Resort
2020 Background PM


1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBT	EBR	WBL	WBR	NBL	NBR	SBL	SBT	SBR
Movement	EBT	EBR	WBL	WBR	NBL	NBR	SBL	SBT	SBR
Lane Configurations	EBT	EBR	WBL	WBR	NBL	NBR	SBL	SBT	SBR
Traffic Volume (veh/h)	246	875	23	937	63	7	62	18	62
Future Volume (veh/h)	246	875	23	937	63	7	62	18	62
Initial Q (Obs.) veh	0	0	0	0	0	0	0	0	0
Pod-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No	No	No	No	No	No	No	No	No
Adj Sat Flow (veh/h)	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	273	972	32	26	1041	70	8	69	20
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2
Cap. veh/h	468	2610	86	416	2172	146	86	127	37
Arrive On Green	0.07	0.74	0.14	0.85	0.85	0.09	0.09	0.04	0.16
Sat Flow, veh/h	1781	3511	116	561	3379	227	1155	1394	404
Grp Sat Flow(s),veh/h	1781	3511	116	561	3379	227	1155	1394	404
Grp Sat Flow(s),veh/h	1781	3511	116	561	3379	227	1155	1394	404
Q Serve(g,s)	6.4	12.8	12.8	0.9	9.8	9.8	0.9	6.2	4.5
Cycle Q Clear(g,c)	6.4	12.8	12.8	0.9	9.8	9.8	0.9	6.2	4.5
Prop In Lane	1.00	0.06	1.00	1.00	0.12	1.00	0.22	1.00	0.77
V/C Ratio(X)	0.58	0.37	0.37	0.06	0.48	0.09	0.00	0.54	0.38
Avail Cap(c,a)	658	1321	1375	416	1142	1176	86	164	181
HCM Platoon Ratio	1.00	1.00	1.00	1.33	1.33	1.00	1.00	1.00	1.00
Upstream Filter(0)	1.00	1.00	1.00	0.55	0.55	1.00	0.00	1.00	1.00
Uniform Delay (d), s/veh	6.8	5.9	5.9	3.4	4.1	4.1	62.0	0.0	56.5
Incr Delay (d2), s/veh	1.2	0.8	0.8	0.2	0.8	0.5	0.0	2.8	1.3
Initial Q Delay(g3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(50%),veh/m	2.4	4.6	4.8	0.1	2.8	2.9	0.3	0.0	2.9
Unsig. Movement Delay, s/veh	8.0	6.7	6.7	3.6	4.9	4.9	62.5	0.0	59.3
LnGrp Delay(d),s/veh	A	A	A	A	A	A	E	D	A
LnGrp LOS	A	A	A	A	A	A	E	D	A
Approach Vol, veh/h	1277			1137			97		295
Approach Delay, s/veh	7.0			4.8			59.5		58.7
Approach LOS	A			A			E		E
Timer - Assigned Phs	1	2	3	4	6	8			
Phs Duration (G+Y+Rc), s	13.1	89.6	9.0	18.3	102.7	27.3			
Change Period (Y+Rc), s	4.0	6.0	4.0	6.5	6.0	6.5			
Max Green Setting (Gmax), s	23.0	44.0	5.0	37.5	71.0	46.5			
Max Q Clear Time (g_c+I1), s	8.4	11.8	6.5	11.3	14.8	19.4			
Green Ext Time (g_c), s	0.7	9.5	0.0	0.5	8.4	1.5			
Intersection Summary									
HCM 6th Ctrl Delay									
HCM 6th LOS									

Smoke Tree Resort
2020 Background PM

2: Quail Run Rd & Lincoln Drive
Timings

	EBL	EBT	WBT	NBT	SBL	SBT
Lane Group	EBL	EBT	WBT	NBT	SBL	SBT
Lane Configurations	5	4	4	4	4	4
Traffic Volume (vph)	85	886	929	0	14	0
Future Volume (vph)	85	886	929	0	14	0
Turn Type	pm-plt	NA	NA	NA	Perm	NA
Protected Phases	7	4	8	2	6	6
Permitted Phases	4				6	6
Detector Phase	7	4	8	2	6	6
Switch Phase						
Minimum Initial (s)	3.5	15.0	15.0	7.0	7.0	7.0
Minimum Split (s)	8.0	28.0	28.0	33.0	33.0	33.0
Total Split (s)	20.0	94.0	74.0	36.0	36.0	36.0
Total Split (%)	15.4%	72.3%	56.9%	27.7%	27.7%	27.7%
Yellow Time (s)	3.0	4.0	4.0	4.5	4.5	4.5
All-Red Time (s)	1.0	2.5	2.5	1.5	1.5	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.5	6.5	6.0	6.0	6.0
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Recall Mode	None		None		C-Max	C-Max
Act Effct Green (s)	67.4	64.9	50.7	52.6	52.6	52.6
Actuated g/C Ratio	0.52	0.50	0.39	0.40	0.40	0.40
v/c Ratio	0.42	0.56	0.77	0.00	0.03	0.13
Control Delay	30.0	35.1	38.2	0.0	28.5	0.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	30.0	35.1	38.2	0.0	28.5	0.3
LOS	C	D	D	A	C	A
Approach Delay		34.7	38.2			4.1
Approach LOS		C	D			A

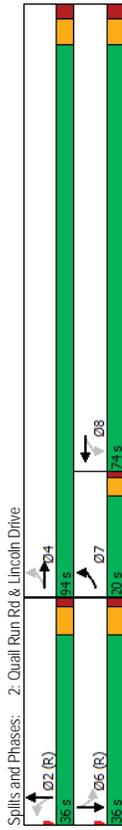

Smoke Tree Resort
2020 Background PM

2: Quail Run Rd & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (veh/h)	85	886	1	0	929	25	0	0	2	14	0	93
Future Volume (veh/h)	85	886	1	0	929	25	0	0	2	14	0	93
Initial Q (Obs.) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A..pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No											
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	94	984	1	0	1032	28	0	0	2	16	0	103
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	183	1554	2	55	1230	33	0	0	756	730	0	756
Arrive On Green	0.10	0.85	0.85	0.00	0.35	0.35	0.00	0.00	0.48	0.48	0.00	0.48
Sat Flow, veh/h	1781	3643	4	571	3534	96	0	0	1885	1415	0	1585
Grp Volume(v), veh/h	94	480	505	0	519	541	0	0	2	16	0	103
Grp Sat Flow(s),veh/h	1781	1777	1870	571	1777	1853	0	0	1585	1415	0	1585
Q Serve(g..s), s	4.3	11.2	11.2	0.0	35.0	35.0	0.0	0.0	0.1	0.8	0.0	4.7
Cycle Q Clear(g..c), s	4.3	11.2	11.2	0.0	35.0	35.0	0.0	0.0	0.1	0.9	0.0	4.7
Prop In Lane	1.00	0.00	1.00	1.00	0.05	0.05	0.00	0.00	1.00	1.00	0.00	1.00
Lane Grp Cap(c), veh/h	183	758	798	55	619	645	0	0	756	730	0	756
v/c Ratio(x)	0.51	0.63	0.63	0.00	0.84	0.84	0.00	0.00	0.00	0.02	0.00	0.14
Avail Cap(c..a), veh/h	317	1196	1258	153	923	962	0	0	756	730	0	756
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	0.93	0.93	0.93	0.00	1.00	1.00	0.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	28.6	6.3	6.3	0.0	39.0	39.0	0.0	0.0	17.8	18.0	0.0	19.0
Incr Delay (d2), s/veh	2.1	0.8	0.8	0.0	4.5	4.3	0.0	0.0	0.0	0.1	0.0	0.4
Initial Q Delay(Q3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile Back(Q50%),veh/h	1.8	2.5	2.6	0.0	15.9	16.6	0.0	0.0	0.0	0.3	0.0	1.8
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	30.7	7.1	7.1	0.0	43.5	43.3	0.0	0.0	17.8	18.1	0.0	19.4
LnGrp LOS	C	A	A	A	D	D	A	A	A	B	A	B
Approach Vol, veh/h	1079			1060			2				119	
Approach Delay, s/veh	9.1			43.4			17.8				19.2	
Approach LOS	A			D			B				B	
Timer - Assigned Phs	2	4	6	7	8							
Phs Duration (G+Y+Rc), s	68.0	62.0	68.0	10.2	51.8							
Change Period (Y+Rc), s	6.0	6.5	6.0	4.0	6.5							
Max Green Setting (Gmax), s	30.0	87.5	30.0	16.0	67.5							
Max Q Clear Time (g_c+I1), s	2.1	13.2	6.7	6.3	37.0							
Green Ext Time (g_c), s	0.0	8.2	0.6	0.1	8.3							
Intersection Summary												
HCM 6th Ctrl Delay		25.7										
HCM 6th LOS		C										

Smoke Tree Resort
2020 Background PM

3: Smoke Tree West & Lincoln Dr
HCM 6th TWSC

Intersection											
Int Delay, s/veh	0										
Movement	EBT	EBR	WBL	WBT	NBL	NBR					
Lane Configurations	↕	↕	↕	↕	↕	↕					
Traffic Vol, veh/h	902	1	0	953	0	0					
Future Vol, veh/h	902	1	0	953	0	0					
Conflicting Peds, #/hr	0	0	0	0	0	0					
Sign Control	Free	Free	Free	Free	Stop	Stop					
RT Channelized	-	None	-	None	-	None					
Storage Length	-	-	25	-	0	-					
Veh in Median Storage, #	0	-	-	0	0	-					
Grade, %	0	-	-	-	0	0					
Peak Hour Factor	90	90	90	90	90	90					
Heavy Vehicles, %	2	2	2	2	2	2					
Mvmt Flow	1002	1	0	1059	0	0					
Major/Minor	Major1	Major2	Minor1								
Conflicting Flow All	0	0	1003	0	1533	502					
Stage 1	-	-	-	1003	-	-					
Stage 2	-	-	-	-	530	-					
Critical Hdwy	-	-	4.14	-	6.84	6.94					
Critical Hdwy Stg 1	-	-	-	-	5.84	-					
Critical Hdwy Stg 2	-	-	-	-	5.84	-					
Follow-up Hdwy	-	-	2.22	-	3.52	3.32					
Pot Cap-1 Maneuver	-	-	686	-	107	515					
Stage 1	-	-	-	-	315	-					
Stage 2	-	-	-	-	555	-					
Platoon blocked, %	-	-	-	-	-	-					
Mov Cap-1 Maneuver	-	-	686	-	107	515					
Mov Cap-2 Maneuver	-	-	-	-	227	-					
Stage 1	-	-	-	-	315	-					
Stage 2	-	-	-	-	555	-					
Approach	EB	WB	NB								
HCM Control Delay, s	0	0	0								
HCM LOS				A							
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT						
Capacity (veh/h)	-	-	-	686	-						
HCM Lane V/C Ratio	-	-	-	-	-						
HCM Control Delay (s)	0	-	-	0	-						
HCM Lane LOS	A	-	-	A	-						
HCM 95th %tile Q(veh)	-	-	-	0	-						

Smoke Tree Resort
2020 Background PM

4: Smoke Tree East & Lincoln Dr
HCM 6th TWSC

Intersection											
Int Delay, s/veh	0										
Movement	EBT	EBR	WBL	WBT	NBL	NBR					
Lane Configurations	↕	↕	↕	↕	↕	↕					
Traffic Vol, veh/h	901	1	2	953	2	2					
Future Vol, veh/h	901	1	2	953	2	2					
Conflicting Peds, #/hr	0	0	0	0	0	0					
Sign Control	Free	Free	Free	Free	Stop	Stop					
RT Channelized	-	None	-	None	-	None					
Storage Length	-	-	25	-	0	-					
Veh in Median Storage, #	0	-	-	0	0	-					
Grade, %	0	-	-	-	0	0					
Peak Hour Factor	90	90	90	90	90	90					
Heavy Vehicles, %	2	2	2	2	2	2					
Mvmt Flow	1001	1	2	1059	2	2					
Major/Minor	Major1	Major2	Minor1								
Conflicting Flow All	0	0	1002	0	1536	501					
Stage 1	-	-	-	-	534	-					
Stage 2	-	-	-	-	534	-					
Critical Hdwy	-	-	4.14	-	6.84	6.94					
Critical Hdwy Stg 1	-	-	-	-	5.84	-					
Critical Hdwy Stg 2	-	-	-	-	5.84	-					
Follow-up Hdwy	-	-	2.22	-	3.52	3.32					
Pot Cap-1 Maneuver	-	-	687	-	107	515					
Stage 1	-	-	-	-	316	-					
Stage 2	-	-	-	-	552	-					
Platoon blocked, %	-	-	-	-	-	-					
Mov Cap-1 Maneuver	-	-	687	-	107	515					
Mov Cap-2 Maneuver	-	-	-	-	227	-					
Stage 1	-	-	-	-	315	-					
Stage 2	-	-	-	-	552	-					
Approach	EB	WB	NB								
HCM Control Delay, s	0	0	0								
HCM LOS				C							
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT						
Capacity (veh/h)	315	-	-	687	-						
HCM Lane V/C Ratio	0.014	-	-	0.003	-						
HCM Control Delay (s)	16.6	-	-	10.3	-						
HCM Lane LOS	C	-	-	B	-						
HCM 95th %tile Q(veh)	0	-	-	0	-						

Smoke Tree Resort
2020 Background PM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	Init Delay, s/veh									
	0.7									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↕	↕	↕	↕	↕	↕				
Traffic Vol, veh/h	896	7	21	925	30	26				
Future Vol, veh/h	896	7	21	925	30	26				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	-	0	0				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	996	8	23	1028	33	29				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	1004	0	1560	502				
Stage 1	-	-	-	-	1000	-				
Stage 2	-	-	-	-	560	-				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	686	-	103	515				
Stage 1	-	-	-	-	317	-				
Stage 2	-	-	-	-	535	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	686	-	99	515				
Mov Cap-2 Maneuver	-	-	-	-	216	-				
Stage 1	-	-	-	-	306	-				
Stage 2	-	-	-	-	535	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0.2	20.4							
HCM LOS	C									
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	296	-	-	686	-					
HCM Lane V/C Ratio	0.21	-	-	0.034	-					
HCM Control Delay (s)	20.4	-	-	10.4	-					
HCM Lane LOS	C	-	-	B	-					
HCM 95th %ile Q(veh)	0.8	-	-	0.1	-					

Smoke Tree Resort
2020 Background PM

6: Lincoln Medical East & Lincoln Dr
HCM 6th TWSC

Intersection	Init Delay, s/veh									
	0.2									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↕	↕	↕	↕	↕	↕				
Traffic Vol, veh/h	918	4	0	945	2	30				
Future Vol, veh/h	918	4	0	945	2	30				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	-	0	0				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	1020	4	0	1050	2	33				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	1024	0	1547	512				
Stage 1	-	-	-	-	1022	-				
Stage 2	-	-	-	-	525	-				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	674	-	105	507				
Stage 1	-	-	-	-	308	-				
Stage 2	-	-	-	-	558	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	674	-	105	507				
Mov Cap-2 Maneuver	-	-	-	-	224	-				
Stage 1	-	-	-	-	308	-				
Stage 2	-	-	-	-	558	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0	13.3							
HCM LOS	B									
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	470	-	-	674	-					
HCM Lane V/C Ratio	0.076	-	-	-	-					
HCM Control Delay (s)	13.3	-	-	0	-					
HCM Lane LOS	B	-	-	A	-					
HCM 95th %ile Q(veh)	0.2	-	-	0	-					

Smoke Tree Resort
2020 Background PM

7: Apartment Drwy & Lincoln Dr
HCM 6th TWSC

Intersection													
Init Delay, s/vch													
13.1													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	7 886	42	6 849	9 68	3 49	7 0	35						
Future Vol, veh/h	7 886	42	6 849	9 68	3 49	7 0	35						
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	-	-	-	-	-	-	-	-	-	-	-
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	-	0	-	-	-	0
Grade, %	-	0	-	-	0	-	-	-	0	-	-	-	0
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	8 984	47	7 943	10 76	3 54	8 0	39						
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	953	0	0 1031	0	0 1510	1991	516	1472	-	477			
Stage 1	-	-	-	-	-	1024	1024	-	962	-	-	-	-
Stage 2	-	-	-	-	-	486	967	-	510	-	-	-	-
Critical Hdwy	4.14	-	-	4.14	-	7.54	6.54	6.94	7.54	-	6.94	-	-
Critical Hdwy Stg 1	-	-	-	-	-	6.54	5.54	-	6.54	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	6.54	5.54	-	6.54	-	-	-	-
Follow-up Hdwy	2.22	-	-	2.22	-	3.52	4.02	3.32	3.52	-	3.32	-	-
Pot Cap-1 Maneuver	717	-	-	670	-	83	60	504	88	0	534	-	-
Stage 1	-	-	-	-	-	252	311	-	275	0	-	-	-
Stage 2	-	-	-	-	-	531	331	-	514	0	-	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	717	-	-	670	-	76	59	504	74	-	534	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	76	59	-	74	-	-	-	-
Stage 1	-	-	-	-	-	249	308	-	272	-	-	-	-
Stage 2	-	-	-	-	-	487	328	-	448	-	-	-	-
Approach	EB	WB	NB	SB									
HCM Control Delay, s	0.1	0.1	204.9	20.1									
HCM LOS	F	F	C	C									
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	115	717	-	-	670	-	-	74	534				
HCM Lane V/C Ratio	1.159	0.011	-	-	0.01	-	-	0.105	0.073				
HCM Control Delay (s)	204.9	10.1	-	-	10.4	-	-	59.3	12.3				
HCM Lane LOS	F	B	-	-	B	-	-	F	B				
HCM 95th %ile Q(veh)	8.3	0	-	-	0	-	-	0.3	0.2				

Smoke Tree Resort
2020 Background PM


8: AJ's Drwy & Lincoln Dr
HCM 6th TWSC

Intersection													
Init Delay, s/vch													
2.4													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	11 880	55	63 847	8 14	1 92	4 0	7						
Future Vol, veh/h	11 880	55	63 847	8 14	1 92	4 0	7						
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	-	-	-	-	-	-	-	-	-	-	-
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	-	0	-	-	-	0
Grade, %	-	0	-	-	0	-	-	-	0	-	-	-	0
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	12 978	61	70 941	9 16	1 102	4 0	8						
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	950	0	0 1039	0	0 1644	2123	520	1600	-	475			
Stage 1	-	-	-	-	-	1033	1033	-	1086	-	-	-	-
Stage 2	-	-	-	-	-	611	1090	-	514	-	-	-	-
Critical Hdwy	4.14	-	-	4.14	-	7.54	6.54	6.94	7.54	-	6.94	-	-
Critical Hdwy Stg 1	-	-	-	-	-	6.54	5.54	-	6.54	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	6.54	5.54	-	6.54	-	-	-	-
Follow-up Hdwy	2.22	-	-	2.22	-	3.52	4.02	3.32	3.52	-	3.32	-	-
Pot Cap-1 Maneuver	719	-	-	665	-	66	49	501	71	0	536	-	-
Stage 1	-	-	-	-	-	249	308	-	231	0	-	-	-
Stage 2	-	-	-	-	-	448	289	-	511	0	-	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	719	-	-	665	-	59	43	501	50	-	536	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	59	43	-	50	-	-	-	-
Stage 1	-	-	-	-	-	245	303	-	227	-	-	-	-
Stage 2	-	-	-	-	-	395	259	-	398	-	-	-	-
Approach	EB	WB	NB	SB									
HCM Control Delay, s	0.1	0.8	33.7	38									
HCM LOS	D	D	E	E									
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	241	719	-	-	665	-	-	50	536				
HCM Lane V/C Ratio	0.493	0.017	-	-	0.105	-	-	0.089	0.015				
HCM Control Delay (s)	33.7	10.1	-	-	11	-	-	83.9	11.8				
HCM Lane LOS	D	B	-	-	B	-	-	F	B				
HCM 95th %ile Q(veh)	2.5	0.1	-	-	0.4	-	-	0.3	0				

Smoke Tree Resort
2020 Background PM

9: Scottsdale Rd & Lincoln Dr
Timings

EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
510	56	431	56	62	411	1624	61	1569	486
510	56	431	56	62	411	1624	61	1569	486
Split	NA	pm+ov	Split	NA	Prdt	NA	Prdt	NA	pm+ov
4	4	5	8	8	5	2	1	6	4
4	4	5	8	8	5	2	1	6	4
7.0	7.0	7.0	7.0	7.0	10.0	10.0	5.0	10.0	7.0
13.0	13.0	13.0	13.0	13.0	13.0	16.7	11.0	16.0	13.0
30.0	30.0	30.0	13.0	13.0	30.0	73.0	14.0	57.0	30.0
23.1%	23.1%	23.1%	10.0%	10.0%	23.1%	56.2%	10.8%	43.8%	23.1%
4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0
1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5
None	C-Max	None							
24.5	24.5	45.7	7.3	7.3	21.2	70.4	7.9	54.6	84.8
0.19	0.19	0.35	0.06	0.06	0.16	0.54	0.06	0.42	0.65
0.99	0.99	0.80	0.63	0.88	0.82	0.68	0.64	0.82	0.50
100.1	100.6	33.0	86.8	37.9	64.6	23.7	85.4	37.6	11.3
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100.1	100.6	33.0	86.8	37.9	64.6	23.7	85.4	37.6	11.3
F	F	C	F	D	E	C	F	D	B
71.2	E	52.2	D	31.8	C	33.0	C	C	C

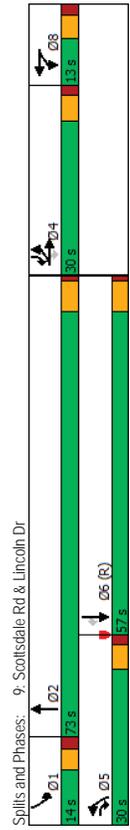

Smoke Tree Resort
2020 Background PM

9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary


EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
510	56	431	56	62	411	1624	61	1569	486
510	56	431	56	62	411	1624	61	1569	486
0	0	0	0	0	0	0	0	0	0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
No	No	No	No	No	No	No	No	No	No
1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
611	0	479	62	69	80	457	1804	50	68
0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
2	2	2	2	2	2	2	2	2	2
671	0	535	101	101	90	515	2537	70	87
0.06	0.00	0.06	0.06	0.06	0.15	0.50	0.50	0.05	0.39
3563	0	1585	1781	1777	1585	3456	5107	141	1781
611	0	479	62	69	80	457	1202	652	68
1781	0	1585	1781	1777	1585	1728	1702	1845	1781
22.2	0.0	24.5	4.4	5.0	6.5	16.9	35.7	35.8	4.9
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
671	0	535	101	101	90	515	1691	916	87
0.91	0.00	0.90	0.61	0.68	0.89	0.89	0.71	0.71	0.78
671	0	535	101	101	90	651	1762	955	119
0.33	0.33	0.33	1.00	1.00	1.00	1.00	1.00	1.00	1.00
1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
59.9	0.0	46.1	59.9	60.1	60.9	54.2	25.5	25.5	61.2
16.2	0.0	17.0	7.6	14.4	57.9	10.3	1.1	2.0	13.9
12.2	0.0	16.7	2.2	2.6	4.1	8.1	14.5	15.9	2.6
76.0	0.0	63.1	67.5	74.6	118.8	64.5	26.5	27.5	41.4
E	A	E	E	E	F	E	C	C	E
1090	211	2311	34.3	37.4	37.4	37.4	37.4	37.4	37.4
1	2	4	5	6	8	8	8	8	8
11.6	70.3	30.0	24.9	57.0	13.0	13.0	5.6	5.6	5.6
5.7	5.7	5.5	5.5	5.7	5.6	5.6	5.6	5.6	5.6
6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7	6.7
6.9	37.8	26.5	18.9	42.8	8.5	8.5	8.5	8.5	8.5
0.0	2.9	0.0	0.5	2.5	0.0	0.0	0.0	0.0	0.0
44.1	D	44.1	D	44.1	D	44.1	D	44.1	D

Notes
User approved pedestrian interval to be less than phase max green.
User approved volume balancing among the lanes for turning movement.
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.

Smoke Tree Resort
2020 Total AM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations	222	981	24	898	5	34	78	88
Traffic Volume (vph)	222	981	24	898	5	34	78	88
Future Volume (vph)	pm+pt	NA	Perm	NA	pm+pt	NA	pm+pt	NA
Turn Type	1	6	2	2	4	4	3	8
Protected Phases	6	6	2	2	4	4	3	8
Permitted Phases	1	6	2	2	4	4	3	8
Detector Phase								
Switch Phase								
Minimum Initial (s)	3.5	15.0	15.0	15.0	7.0	7.0	3.5	7.0
Minimum Split (s)	8.0	27.0	27.0	27.0	33.5	33.5	8.0	33.5
Total Split (s)	27.0	77.0	50.0	50.0	44.0	44.0	9.0	53.0
Total Split (%)	20.8%	59.2%	38.5%	38.5%	33.8%	33.8%	6.9%	40.8%
Yellow Time (s)	3.0	4.5	4.5	4.5	4.0	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	1.5	2.5	2.5	1.0	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.0	6.5	6.5	4.0	6.5
Lead/Lag	Lead	Lag	Lag	Lag	Lag	Lag	Lead	Lead
Lead/Lag Optimize?	Yes							
Recall Mode	None	C-Max	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	93.3	91.3	70.1	70.1	17.4	17.4	28.7	26.2
Actuated g/C Ratio	0.72	0.70	0.54	0.54	0.13	0.13	0.22	0.20
v/c Ratio	0.98	0.45	0.11	0.11	0.55	0.08	0.32	0.84
Control Delay	13.3	10.2	18.5	25.6	46.2	31.3	42.1	50.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	13.3	10.2	18.5	25.6	46.2	31.3	42.1	50.2
LOS	B	B	B	C	D	C	D	D
Approach Delay	10.7	10.7	25.4	25.4	32.6	32.6	48.6	48.6
Approach LOS	B	B	C	C	C	C	D	D

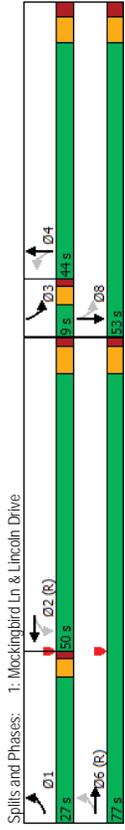

Smoke Tree Resort
2020 Total AM


1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Movement	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations	222	981	30	24	898	44	5	34
Traffic Volume (veh/h)	222	981	30	24	898	44	5	34
Future Volume (veh/h)	0	0	0	0	0	0	0	0
Initial Q (Obs.) veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pbT)	No	No	No	No	No	No	No	No
Work Zone On Approach	1870	1870	1870	1870	1870	1870	1870	1870
Adj Sat Flow (veh/h)	247	1090	33	27	998	49	6	38
Adj Flow Rate	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Peak Hour Factor	2	2	2	2	2	2	2	2
Percent Heavy Veh. %	39.4	233.5	71	312	191.5	94	88	175
Cap. veh/h	0.08	0.66	0.66	0.56	0.56	0.17	0.17	0.17
Arrive On Green	1781	3521	107	502	3447	169	1024	1017
Sat Flow (veh/h)	247	550	573	27	514	533	6	65
Grp Volume(v) veh/h	1781	1777	1851	502	1777	1840	1024	0
Grp Sat Flow(s) veh/h	7.4	19.6	19.6	3.6	23.5	23.5	0.7	4.2
Cycle Q Clear @ C. s	7.4	19.6	19.6	9.3	23.5	18.9	0.0	4.2
Q Serve @ C. s	1.00	0.06	1.00	0.09	1.00	0.09	0.42	1.00
Prop In Lane	394	1178	1227	312	987	1022	88	0
Lane Grp Cap(c) veh/h	0.63	0.47	0.47	0.09	0.52	0.07	0.22	0.28
v/c Ratio(x)	572	1178	1227	312	987	1022	208	0
Avail Cap(c.a) veh/h	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	14.0	10.7	10.7	16.4	18.1	18.1	61.3	0.0
Uniform Delay (d) s/veh	1.6	1.3	1.3	0.3	1.1	1.0	0.3	0.4
Incr Delay (d2) s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Initial Q Delay @ C. s/veh	3.0	7.8	8.2	0.4	9.8	10.2	0.2	0.0
%ile BackOfQ @ C. s/veh	15.7	12.0	12.0	16.7	19.2	19.1	61.6	0.0
Unsig. Movement Delay, s/veh	B	B	B	B	B	B	E	A
LnGrp Delay(d) s/veh	1370	12.7	1074	71	480	444	56.0	444
LnGrp LOS	B	B	B	B	B	B	D	D
Approach Vol. veh/h	1	2	3	4	6	8		
Approach Delay, s/veh	78.2	9.0	28.8	92.2	37.8			
Approach LOS	4.0	6.0	4.0	6.5	6.0			
Timer - Assigned Phs	23.0	44.0	5.0	37.5	71.0	46.5		
Phs Duration (G+Y+Rc) s	9.4	25.5	7.0	20.9	21.6	29.2		
Change Period (Y+Rc) s	0.6	7.1	0.0	0.2	9.9	2.2		
Max Green Selling (Gmax) s								
Max Q Clear Time (g_c+I1) s								
Green Ext Time (g_e) s								
Intersection Summary	22.3 C							
HCM 6th Ctrl Delay	22.3 C							

Smoke Tree Resort
2020 Total AM

2: Quail Run Rd & Lincoln Drive
Timings

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations	115	1030	2	863	1	0	26	0
Traffic Volume (vph)	115	1030	2	863	1	0	26	0
Future Volume (vph)	pm-plt	NA	Perm	NA	Perm	NA	Perm	NA
Turn Type	7	4	8	8	2	2	6	6
Protected Phases	4	8	8	8	2	2	6	6
Permitted Phases	4	8	8	8	2	2	6	6
Detector Phase								
Switch Phase								
Minimum Initial (s)	3.5	15.0	15.0	15.0	7.0	7.0	7.0	7.0
Minimum Split (s)	8.0	28.0	28.0	28.0	33.0	33.0	33.0	33.0
Total Split (s)	20.0	94.0	74.0	74.0	36.0	36.0	36.0	36.0
Total Split (%)	15.4%	72.3%	56.9%	56.9%	27.7%	27.7%	27.7%	27.7%
Yellow Time (s)	3.0	4.0	4.0	4.0	4.5	4.5	4.5	4.5
All-Red Time (s)	1.0	2.5	2.5	2.5	1.5	1.5	1.5	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.5	6.5	6.5	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lag	Lag	Lag				
Lead-Lag Optimize?	Yes	Yes	Yes	Yes				
Recall Mode	None	None	None	None	C-Max	C-Max	C-Max	C-Max
Act Effct Green (s)	64.3	61.8	46.6	46.6	55.7	55.7	55.7	55.7
Actuated g/C Ratio	0.49	0.48	0.36	0.36	0.43	0.43	0.43	0.43
v/c Ratio	0.53	0.68	0.02	0.77	0.01	0.05	0.09	0.09
Control Delay	30.0	35.9	26.0	43.2	0.0	26.3	0.2	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	30.0	35.9	26.0	43.2	0.0	26.3	0.2	0.2
LOS	C	D	C	D	A	C	A	A
Approach Delay		35.3		43.1			7.7	
Approach LOS		D		D			A	

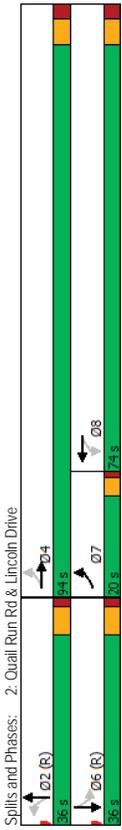

Smoke Tree Resort
2020 Total AM

2: Quail Run Rd & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	115	1030	4	2	863	12	1	0	7	26	0	65
Traffic Volume (veh/h)	115	1030	4	2	863	12	1	0	7	26	0	65
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0	0	0	0
Initial Q (Obs.) veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pbT)	No											
Work Zone On Approach												
Adj Sat Flow (veh/h)	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	128	1144	4	2	959	13	1	0	8	29	0	72
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	210	1506	5	187	1152	16	94	22	681	745	0	775
Arrive On Green	0.13	0.83	0.83	0.32	0.32	0.32	0.49	0.00	0.49	0.49	0.00	0.49
Sat Flow, veh/h	1781	3632	13	490	3590	49	130	44	1393	1407	0	1585
Grp Volume(v), veh/h	128	560	588	2	475	497	9	0	29	0	0	72
Grp Sat Flow(s),veh/h	1781	1777	1868	490	1777	1862	1567	0	0	1407	0	1585
Q Serve(g.s), s	6.1	18.9	18.9	0.4	32.2	32.2	0.0	0.0	0.0	0.9	0.0	3.2
Cycle Q Clear(g_c), s	6.1	18.9	18.9	7.1	32.2	32.2	0.4	0.0	0.0	1.3	0.0	3.2
Prop In Lane	1.00	0.01	1.00	0.03	0.11	0.03	0.11	0.89	1.00	1.00	1.00	1.00
V/C Ratio(X)	0.61	0.76	0.76	0.01	0.83	0.83	0.01	0.00	0.00	0.04	0.00	0.09
Avail Cap(c), veh/h	317	1796	1257	285	923	967	797	0	0	745	0	775
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	0.90	0.90	0.90	1.00	1.00	1.00	1.00	0.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	28.9	8.1	8.1	34.8	40.9	40.9	17.1	0.0	0.0	17.3	0.0	17.8
Incr Delay (d2), s/veh	2.6	1.5	1.4	0.0	3.6	3.4	0.0	0.0	0.0	0.1	0.0	0.2
Initial Q Delay(g3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackQ(50%),veh/m	2.5	3.6	3.7	0.0	14.6	15.2	0.1	0.0	0.0	0.5	0.0	1.2
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	31.4	9.6	9.5	34.9	44.5	44.3	17.1	0.0	0.0	17.4	0.0	18.0
LnGrp LOS	C	A	A	C	D	D	B	A	A	A	B	A
Approach Vol. veh/h	1276			974			9				101	
Approach Delay, s/veh	11.7			44.4			17.1				17.8	
Approach LOS	B			D			B				B	
Timer - Assigned Phs	2	4	4	6	7	8						
Phs Duration (G+Y+Rc), s	69.6	60.4	60.4	69.6	12.2	48.2						
Change Period (Y+Rc), s	6.0	6.5	6.5	6.0	4.0	6.5						
Max Green Setting (Gmax), s	30.0	87.5	87.5	30.0	16.0	67.5						
Max Q Clear Time (g_c+I1), s	2.4	20.9	20.9	5.2	8.1	34.2						
Green Ext Time (g_e), s	0.0	10.5	10.5	0.4	0.2	7.5						
Intersection Summary												
HCM 6th Ctrl Delay												
HCM 6th LOS												

Smoke Tree Resort
2020 Total AM

4: Smoke Tree Access B & Lincoln Dr
HCM 6th TWSC

Intersection	Int Delay, s/veh	EBT	EBR	WBL	WBT	NBL	NBR
Int Delay, s/veh	0.5						
Movement		EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations		↑↑	↑	↑↑	↑↑	↑	↑
Traffic Vol, veh/h	1049	17	26	860	15	22	
Future Vol, veh/h	1049	17	26	860	15	22	
Conflicting Peds, #/hr	0	0	0	0	0	0	0
Sign Control		Free	Free	Free	Free	Stop	Stop
RT Channelized		-	None	-	None	-	None
Storage Length		-	25	-	0	-	0
Veh in Median Storage, #	0	-	-	0	0	-	-
Grade, %	0	-	-	0	0	-	-
Peak Hour Factor	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2
Mvmt Flow	1166	19	29	956	17	24	
Major/Minor		Major1	Major2	Minor1	Minor2		
Conflicting Flow All	0	0	1185	0	1172	593	
Stage 1	-	-	-	-	1176	-	
Stage 2	-	-	-	-	536	-	
Critical Hdwy	-	-	4.14	-	6.84	6.94	
Critical Hdwy Stg 1	-	-	-	-	5.84	-	
Critical Hdwy Stg 2	-	-	-	-	5.84	-	
Follow-up Hdwy	-	-	2.22	-	3.52	3.32	
Pot Cap-1 Maneuver	-	-	585	-	81	449	
Stage 1	-	-	-	-	255	-	
Stage 2	-	-	-	-	551	-	
Platoon blocked, %	-	-	-	-	-	-	
Mov Cap-1 Maneuver	-	-	585	-	77	449	
Mov Cap-2 Maneuver	-	-	-	-	180	-	
Stage 1	-	-	-	-	242	-	
Stage 2	-	-	-	-	551	-	
Approach		EB	WB	NB			
HCM Control Delay, s	0	0.3	0.3	20.1			
HCM LOS				C			
Minor Lane/Major Mvmt		NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	280	-	-	-	585	-	
HCM Lane V/C Ratio	0.147	-	-	-	0.049	-	
HCM Control Delay (s)	20.1	-	-	-	11.5	-	
HCM Lane LOS	C	-	-	-	B	-	
HCM 95th %ile Q(veh)	0.5	-	-	-	0.2	-	

Smoke Tree Resort
2020 Total AM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	Int Delay, s/veh	EBT	EBR	WBL	WBT	NBL	NBR
Int Delay, s/veh	0.4						
Movement		EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations		↑↑	↑	↑↑	↑↑	↑	↑
Traffic Vol, veh/h	1054	17	42	879	6	9	
Future Vol, veh/h	1054	17	42	879	6	9	
Conflicting Peds, #/hr	0	0	0	0	0	0	0
Sign Control		Free	Free	Free	Free	Stop	Stop
RT Channelized		-	None	-	None	-	None
Storage Length		-	25	-	0	-	0
Veh in Median Storage, #	0	-	-	0	0	-	-
Grade, %	0	-	-	0	0	-	-
Peak Hour Factor	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2
Mvmt Flow	1171	19	47	977	7	10	
Major/Minor		Major1	Major2	Minor1	Minor2		
Conflicting Flow All	0	0	1190	0	1764	595	
Stage 1	-	-	-	-	1181	-	
Stage 2	-	-	-	-	583	-	
Critical Hdwy	-	-	4.14	-	6.84	6.94	
Critical Hdwy Stg 1	-	-	-	-	5.84	-	
Critical Hdwy Stg 2	-	-	-	-	5.84	-	
Follow-up Hdwy	-	-	2.22	-	3.52	3.32	
Pot Cap-1 Maneuver	-	-	582	-	75	447	
Stage 1	-	-	-	-	254	-	
Stage 2	-	-	-	-	521	-	
Platoon blocked, %	-	-	-	-	-	-	
Mov Cap-1 Maneuver	-	-	582	-	69	447	
Mov Cap-2 Maneuver	-	-	-	-	170	-	
Stage 1	-	-	-	-	233	-	
Stage 2	-	-	-	-	521	-	
Approach		EB	WB	NB			
HCM Control Delay, s	0	0.5	0.5	19.2			
HCM LOS				C			
Minor Lane/Major Mvmt		NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	271	-	-	-	582	-	
HCM Lane V/C Ratio	0.062	-	-	-	0.08	-	
HCM Control Delay (s)	19.2	-	-	-	11.7	-	
HCM Lane LOS	C	-	-	-	B	-	
HCM 95th %ile Q(veh)	0.2	-	-	-	0.3	-	

Smoke Tree Resort
2020 Total AM


8: AJ's Drwy & Lincoln Dr
HCM 6th TWSC

Intersection	1																
Init Delay, s/veh																	
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR					
Lane Configurations	3	978	55	44	873	8	6	0	42	4	1	12					
Traffic Vol, veh/h	3	978	55	44	873	8	6	0	42	4	1	12					
Future Vol, veh/h	0	0	0	0	0	0	0	0	0	0	0	0					
Conflicting Peds, #/hr	Free																
Sign Control	- - None																
RT Channelized	25 - - - 25 - - - 0 - - - 0 - - - 0 - - - 0 - - - 0 - - -																
Storage Length	- -																
Veh in Median Storage, #	- -																
Grade, %	90 90 90 90 90 90 90 90 90 90 90 90 90																
Peak Hour Factor	2 2 2 2 2 2 2 2 2 2 2 2 2																
Heavy Vehicles, %	3 1087 61 49 970 9 7 0 47 4 1 13																
Mgmt Flow																	
Major/Minor	Major1				Major2				Minor1				Minor2				
Conflicting Flow All	979	0	0	1148	0	0	1708	2201	574	1623	2227	490					
Stage 1	-	-	-	-	-	-	-	1124	1124	-	1073	1073	-				
Stage 2	-	-	-	-	-	-	-	584	1077	-	550	1154	-				
Critical Hwy	4:14	-	-	4:14	-	-	7:54	6:54	6:94	7:54	6:54	6:94					
Critical Hwy Slg 1	-	-	-	-	-	-	-	6:54	5:54	-	6:54	5:54	-				
Critical Hwy Slg 2	-	-	-	-	-	-	-	6:54	5:54	-	6:54	5:54	-				
Follow-up Hwy	2:22	-	-	2:22	-	-	3:52	4:02	3:32	3:52	4:02	3:32					
Pl Cap-1 Maneuver	701	-	-	604	-	-	59	44	462	68	43	524					
Stage 1	-	-	-	-	-	-	-	219	279	-	235	295	-				
Stage 2	-	-	-	-	-	-	-	465	293	-	487	270	-				
Platoon blocked, %	- -																
Mov Cap-1 Maneuver	701	-	-	604	-	-	53	40	462	57	39	524					
Mov Cap-2 Maneuver	-	-	-	-	-	-	-	53	40	-	57	39	-				
Stage 1	-	-	-	-	-	-	-	218	278	-	234	271	-				
Stage 2	-	-	-	-	-	-	-	415	269	-	436	269	-				
Approach	EB	WB	NB	WB	NB	SB											
HCM Control Delay, s	0	0.5	24.8							27.4							
HCM LOS	C									D							
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2								
Capacity (veh/h)	235	701	-	-	604	-	-	57	524								
HCM Lane V/C Ratio	0.227	0.005	-	-	0.081	-	-	0.078	0.025								
HCM Control Delay (s)	24.8	10.2	-	-	11.5	-	-	73.4	12.1								
HCM Lane LOS	C	B	-	-	B	-	-	F	B								
HCM 95th %ile Q(veh)	0.8	0	-	-	0.3	-	-	0.2	0.1								

Smoke Tree Resort
2020 Total AM

9: Scottsdale Rd & Lincoln Dr
Timings

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	SBL	SBT	SBR
Lane Configurations	461	38	469	37	36	307	1316	51	1669	615	
Traffic Volume (vph)	461	38	469	37	36	307	1316	51	1669	615	
Future Volume (vph)	Split	NA	pm+ov	Split	NA	Prot	NA	Prot	NA	pm+ov	
Turn Type	4	4	5	8	8	5	2	1	6	4	
Protected Phases											
Permitted Phases											
Detector Phase											
Switch Phase											
Minimum Initial (s)	7.0	7.0	7.0	7.0	7.0	7.0	10.0	5.0	10.0	7.0	
Minimum Split (s)	13.0	13.0	13.0	13.0	13.0	13.0	16.7	11.0	16.0	13.0	
Total Split (s)	30.0	30.0	30.0	30.0	30.0	30.0	73.0	14.0	57.0	30.0	
Total Split (%)	23.1%	23.1%	23.1%	10.0%	10.0%	23.1%	56.2%	10.8%	43.8%	23.1%	
Yellow Time (s)	4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0	
All-Red Time (s)	1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5	
Lead/Lag	Lead										
Lead/Lag Optimize?	Lead Lag Lead Lag Lead Lag										
Recall Mode	None	None	None	None	None	None	None	None	None	C-Max	None
Act Effct Green (s)	23.8	23.8	43.1	7.2	7.2	19.3	71.3	7.6	57.4	86.8	
Actuated g/C Ratio	0.18	0.18	0.33	0.06	0.06	0.15	0.55	0.06	0.44	0.67	
v/C Ratio	0.90	0.90	0.91	0.42	0.40	0.67	0.54	0.55	0.83	0.61	
Control Delay	93.2	92.7	39.4	72.5	33.9	58.4	205	79.0	36.8	11.6	
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Total Delay	93.2	92.7	39.4	72.5	33.9	58.4	205	79.0	36.8	11.6	
LOS	F	F	D	E	C	E	C	E	D	B	
Approach Delay	67.0										
Approach LOS	E										
Intersection Summary	Intersection LOS: D										
Cycle Length: 130	Natural Cycle: 90										
Actuated Cycle Length: 130	Control Type: Actuated-Coordinated										
Offset: 0 (0%), Referenced to phase 6.SBT, Start of Green	Maximum v/C Ratio: 0.91										
Intersection Capacity Utilization 81.1%	Intersection Signal Delay: 37.1										
Analysis Period (min) 15	ICU Level of Service D										

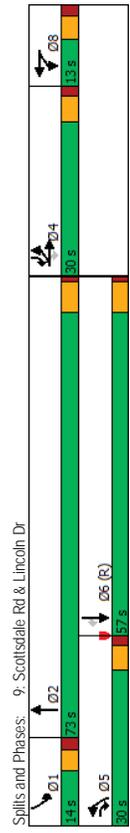

Smoke Tree Resort
2020 Total AM

9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (veh/h)	461	38	469	37	36	48	307	1316	39	51	1669	615
Future Volume (veh/h)	461	38	469	37	36	48	307	1316	39	51	1669	615
Initial Q (Q _{bb}) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pb1)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	No	No	No	No	No	No	No	No	No	No	No	No
Work Zone On Approach	No	No	No	No	No	No	No	No	No	No	No	No
Adj Sat Flow, veh/hln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	542	0	521	41	40	53	341	1462	43	57	1854	683
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	671	0	483	95	95	85	401	2401	71	73	2015	924
Arrive On Green	0.19	0.00	0.19	0.05	0.05	0.05	0.12	0.47	0.47	0.04	0.39	0.39
Sat Flow, veh/h	3563	0	1585	1781	1777	1585	3456	5098	150	1781	5106	1585
Grp Volume(v), veh/h	542	0	521	41	40	53	341	976	529	57	1854	683
Grp Sat Flow(s),veh/hln	1781	0	1585	1781	1777	1585	1728	1702	1843	1781	1702	1585
Q Serve(g-s), s	18.9	0.0	24.5	2.9	2.8	4.3	12.6	27.7	27.7	4.1	44.9	41.0
Cycle O Clear(g_c), s	18.9	0.0	24.5	2.9	2.8	4.3	12.6	27.7	27.7	4.1	44.9	41.0
Prop In Lane	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lane Grp Cap(c), veh/h	671	0	483	95	95	85	401	1603	868	73	2015	924
V/C Ratio(x)	0.81	0.00	1.08	0.43	0.42	0.63	0.85	0.61	0.61	0.78	0.92	0.74
Avail Cap(c), veh/h	671	0	483	101	101	90	651	1762	954	119	2015	924
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	50.5	0.0	45.2	59.6	59.6	60.3	56.4	25.5	25.5	61.7	37.4	19.9
Incr Delay (d2), s/veh	6.7	0.0	64.1	1.1	1.1	8.2	3.0	0.3	0.6	6.5	8.4	5.3
Initial Q Delay(Q3),s/veh	9.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%)veh/h	9.1	0.0	24.0	1.3	1.3	1.9	5.7	11.2	12.2	2.0	20.0	24.0
Unsig. Movement Delay, s/veh	57.2	0.0	109.3	60.8	60.7	68.4	59.4	25.8	26.1	68.2	45.8	25.1
LnGrp Delay(d)S/veh	E	A	F	E	E	E	E	C	C	E	D	C
LnGrp LOS	E	A	F	E	E	E	E	C	C	E	D	C
Approach Vol, veh/h	1063			134			1846				2594	
Approach Delay, s/veh	82.8			63.8			32.1				40.8	
Approach LOS	F			E			C				D	
Timer - Assigned Phs	1	2	2	4	5	6	8					
Phs Duration (G+Y+Rc), s	10.6	66.9	30.0	20.6	57.0	12.5						
Change Period (Y+Rc), s	* 5.3	5.7	5.5	5.5	5.7	5.6						
Max Green Stalling (Gmax), s	* 8.7	67.3	24.5	24.5	51.3	7.4						
Max Q Clear Time (g_c+1T), s	6.1	29.7	26.5	14.6	46.9	6.3						
Green Ext Time (p_c), s	0.0	2.2	0.0	0.5	1.9	0.0						
Intersection Summary												
HCM 6th Ctrl Delay	46.4											
HCM 6th LOS	D											

Notes
User approved pedestrian interval to be less than phase max green.
User approved volume balancing among the lanes for turning movement.
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.

Smoke Tree Resort
2020 Total AM

10: Quail Run Rd & Access A
HCM 6th TWSC


Intersection	0											
In Delay, s/veh	0											
Movement	WBL	WBR	NBT	NBR	SBL	SBT						
Lane Configurations	W	W	T	T	T	T						
Traffic Vol, veh/h	0	1	0	0	1	0						
Future Vol, veh/h	0	1	0	0	1	0						
Conflicting Peds, #/hr	0	0	0	0	0	0						
Sign Control	Stop	Stop	Free	Free	Free	Free						
RT Channelized	-	None	-	None	-	None						
Storage Length	0	-	-	-	-	-						
Veh in Median Storage, #	0	-	0	-	0	-						
Grade, %	0	-	0	-	0	-						
Peak Hour Factor	90	90	90	90	90	90						
Heavy Vehicles, %	2	2	2	2	2	2						
Mvmt Flow	0	1	0	0	1	0						
Major/Minor	Minor1	Major1	Major1	Major2								
Conflicting Flow All	2	0	0	0	0	0						
Stage 1	0	-	-	-	-	-						
Stage 2	2	-	-	-	-	-						
Critical Hdwy	6.42	6.22	-	-	4.12	-						
Critical Hdwy Stg 1	5.42	-	-	-	-	-						
Critical Hdwy Stg 2	5.42	-	-	-	-	-						
Follow-up Hdwy	3.518	3.318	-	-	2.218	-						
Pl Cap-1 Maneuver	1021	-	-	-	-	-						
Stage 1	-	-	-	-	-	-						
Stage 2	1021	-	-	-	-	-						
Platoon blocked, %	-	-	-	-	-	-						
Mov Cap-1 Maneuver	1021	-	-	-	-	-						
Mov Cap-2 Maneuver	1021	-	-	-	-	-						
Stage 1	-	-	-	-	-	-						
Stage 2	1021	-	-	-	-	-						
Approach	WB	NB	SB									
HCM Control Delay, s	0											
HCM LOS												
Minor Lane/Major Mvmt	NBT	NBR/WB Ln1	SBL	SBT								
Capacity (veh/h)	-	-	-	-								
HCM Lane V/C Ratio	-	-	-	-								
HCM Control Delay (s)	-	-	-	-								
HCM Lane LOS	-	-	-	-								
HCM 95th %tile Q(veh)	-	-	-	-								

Notes
User approved pedestrian interval to be less than phase max green.
User approved volume balancing among the lanes for turning movement.
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.

Smoke Tree Resort
2020 Total AM Mitigated

1: Mockingbird Ln & Lincoln Drive
Timings

EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
→	→	←	←	→	→	←	←
EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
222	981	24	898	5	34	78	88
222	981	24	898	5	34	78	88
pm+pt	NA	Perm	NA	pm+pt	NA	pm+pt	NA
1	6	2	7	4	3	8	
Permitted Phases	6	2	2	4	8	8	
Detector Phase	1	6	2	2	7	4	3
Switch Phase							
Minimum Initial (s)	3.5	15.0	15.0	5.0	7.0	3.5	7.0
Minimum Split (s)	8.0	27.0	27.0	9.5	33.5	8.0	33.5
Total Split (s)	27.0	67.0	40.0	40.0	10.0	44.0	53.0
Total Split (%)	20.8%	51.5%	30.8%	30.8%	7.7%	33.8%	14.6%
Yellow Time (s)	3.0	4.5	4.5	4.5	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	1.5	1.0	2.5	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.0	4.5	6.5	4.0
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lead	Lag
Lead/Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	91.3	89.3	68.7	68.7	19.9	14.2	26.2
Actuated g/C Ratio	0.70	0.69	0.53	0.53	0.15	0.11	0.24
v/c Ratio	0.61	0.46	0.11	0.56	0.05	0.30	0.27
Control Delay	16.5	11.8	15.2	19.1	32.0	34.2	38.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	16.5	11.8	15.2	19.1	32.0	34.2	38.7
LOS	B	B	B	C	C	D	D
Approach Delay	12.7	19.0	19.0	34.0	34.0	48.0	48.0
Approach LOS	B	B	B	C	C	D	D
Intersection Summary							
Cycle Length: 130							
Actuated Cycle Length: 130							
Offset: 0 (0%), Referenced to phase 2:WBT and 6:EBTL, Start of Green							
Natural Cycle: 90							
Control Type: Actuated-Coordinated							
Maximum v/c Ratio: 0.84							
Intersection Signal Delay: 20.8							
Intersection Capacity Utilization 74.9%							
Analysis Period (min) 15							

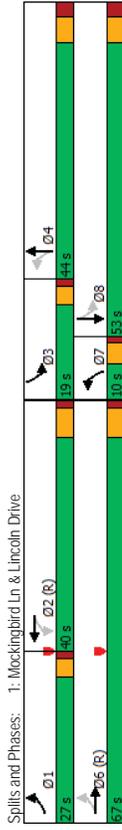

Smoke Tree Resort
2020 Total AM Mitigated

1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary


EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
→	→	←	←	→	→	←	←
EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
222	981	30	24	898	44	5	34
222	981	30	24	898	44	5	34
Initial Q (Obs), veh	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	No						
Work Zone On Approach	No						
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	247	1090	33	27	998	49	6
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2
Cap. veh/h	369	2186	66	282	1747	86	101
Arrive On Green	0.08	0.62	0.62	0.51	0.51	0.01	0.20
Sat Flow, veh/h	1781	3521	107	502	3447	169	1781
Grp Volume(V), veh/h	247	550	573	27	514	533	6
Grp Sat Flow(s),veh/h	1781	1777	1851	502	1777	1840	1781
Cycle O Clear(Q_c), s	8.3	22.1	22.1	11.3	26.1	26.1	0.3
Prop In Lane	1.00	0.06	1.00	1.00	0.09	1.00	0.42
Line Grp Cap(C), veh/h	369	1103	1149	282	901	933	101
V/C Ratio(X)	0.67	0.50	0.50	0.10	0.57	0.57	0.06
Avail Cap(C_a), veh/h	535	1103	1149	282	901	933	163
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(0)	1.00	1.00	1.00	0.55	0.55	0.55	1.00
Uniform Delay (d), s/veh	17.4	13.5	13.5	20.7	22.3	22.3	42.7
Incr Delay (d2), s/veh	2.1	1.6	1.5	0.4	1.5	1.4	0.2
Initial Q Delay(Q3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(50%),veh/m	3.5	9.1	9.5	0.5	11.2	11.6	0.2
Unsig. Movement Delay, s/veh	19.5	15.1	15.1	21.1	23.7	23.7	43.0
LnGrp Delay(d)s/veh	B	B	B	C	C	C	D
LnGrp LOS	B	B	B	C	C	C	D
Approach Vol, veh/h	1370	1074			71		444
Approach Delay, s/veh	15.9	23.6			43.4		55.1
Approach LOS	B	C			D		E
Timer - Assigned Phs	1	2	3	4	6	7	8
Phs Duration (G+Y+Rc), s	14.8	71.9	10.7	32.6	86.7	5.5	37.8
Change Period (Y+Rc), s	4.0	6.0	4.0	6.5	6.0	4.5	6.5
Max Green Selling (Gmax), s	23.0	34.0	15.0	37.5	61.0	5.5	46.5
Max Q Clear Time (Q_c+I1), s	10.3	28.1	6.9	6.0	24.1	2.3	29.2
Green Ext Time (p_c), s	0.6	3.3	0.1	0.3	9.5	0.0	2.2
Intersection Summary							
HCM 6th Ctrl Delay					25.2		
HCM 6th LOS					C		
Notes							

User approved pedestrian interval to be less than phase max green.

Smoke Tree Resort
2020 Total PM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations	246	888	25	949	7	62	65	48
Traffic Volume (vph)	246	888	25	949	7	62	65	48
Future Volume (vph)	pm-plt	NA	Perm	NA	Perm	NA	pm+pt	NA
Turn Type	1	6	2	2	4	4	3	8
Protected Phases	6	6	2	2	4	4	3	8
Permitted Phases	1	6	2	2	4	4	3	8
Detector Phase								
Switch Phase								
Minimum Initial (s)	3.5	15.0	15.0	15.0	7.0	7.0	3.5	7.0
Minimum Split (s)	8.0	27.0	27.0	27.0	33.5	33.5	8.0	33.5
Total Split (s)	27.0	77.0	50.0	50.0	44.0	44.0	9.0	53.0
Total Split (%)	20.8%	59.2%	38.5%	38.5%	33.8%	33.8%	6.9%	40.8%
Yellow Time (s)	3.0	4.5	4.5	4.5	4.0	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	1.5	2.5	2.5	1.0	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.0	6.5	6.5	4.0	6.5
Lead/Lag	Lead	Lag	Lag	Lag	Lag	Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	101.1	99.1	76.2	76.2	11.2	11.2	20.9	18.4
Actuated g/C Ratio	0.78	0.76	0.59	0.59	0.09	0.09	0.16	0.14
v/c Ratio	0.59	0.38	0.09	0.55	0.09	0.55	0.39	0.64
Control Delay	11.8	6.2	10.4	19.8	54.7	61.1	51.9	27.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.8	6.2	10.4	19.8	54.7	61.1	51.9	27.6
LOS	B	A	B	B	D	E	D	C
Approach Delay	7.4	19.6	19.6	60.6	33.5			
Approach LOS	A	B	B	E	C			

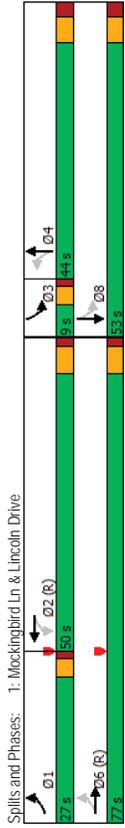

Smoke Tree Resort
2020 Total PM


1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Movement	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Configurations	246	888	29	25	949	66	7	62	20
Traffic Volume (veh/h)	246	888	29	25	949	66	7	62	20
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0
Initial Q (Obs.) veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Pod-Bike Adj(A_pbT)	No	No	No	No	No	No	No	No	No
Work Zone On Approach	No	No	No	No	No	No	No	No	No
Adj Sat Flow (veh/h)	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	273	987	32	28	1054	73	8	69	22
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh. %	2	2	2	2	2	2	2	2	2
Cap. veh/h	462	2612	85	411	2167	150	86	124	39
Arrive On Green	0.07	0.74	0.14	0.85	0.85	0.85	0.09	0.09	0.04
Sat Flow, veh/h	1781	3513	114	553	3372	233	1155	1359	433
Grp Volume(v), veh/h	273	999	520	28	552	572	8	91	72
Grp Sat Flow(s),veh/h/h	1781	1777	1850	553	1777	1828	1155	0	1792
Q Serve(g.s), s	6.4	13.0	13.0	1.0	10.1	10.1	0.9	0.0	6.3
Cycle Q Clear(g_c), s	6.4	13.0	13.0	1.0	10.1	10.1	9.3	0.0	6.3
Prop In Lane	1.00	0.06	1.00	1.00	0.13	1.00	0.24	1.00	0.77
Lane Grp Cap(c), veh/h	462	1321	1375	411	1142	1175	86	0	163
v/c Ratio(x)	0.59	0.38	0.38	0.07	0.49	0.49	0.00	0.56	0.40
Avail Cap(c_a), veh/h	653	1321	1375	411	1142	1175	314	0	517
HCM Platoon Ratio	1.00	1.00	1.00	1.33	1.33	1.33	1.00	1.00	1.00
Upstream Filter(i)	1.00	1.00	1.00	0.54	0.54	0.54	1.00	0.00	1.00
Uniform Delay (d), s/veh	6.9	5.9	5.9	3.4	4.1	4.1	62.0	0.0	56.6
Incr Delay (d2), s/veh	1.2	0.8	0.8	0.2	0.8	0.8	0.5	0.0	2.9
Initial Q Delay(g3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	2.4	4.7	4.9	0.1	2.8	2.9	0.3	0.0	3.0
Unsig. Movement Delay, s/veh	8.1	6.8	6.7	3.6	4.9	4.9	62.5	0.0	59.5
LnGrp Delay(d),s/veh	A	A	A	A	A	A	E	D	A
LnGrp LOS	A	A	A	A	A	A	E	D	A
Approach Vol, veh/h	1292				1155		99		298
Approach Delay, s/veh	7.0				4.9		59.8		58.7
Approach LOS	A				A		E		E
Timer - Assigned Phs	1	2	3	4	6	8			
Phs Duration (G+Y+Rc), s	13.1	89.6	9.0	18.3	102.7	27.3			
Change Period (Y+Rc), s	4.0	6.0	4.0	6.5	6.0	6.5			
Max Green Setting (Gmax), s	23.0	44.0	5.0	37.5	71.0	46.5			
Max Q Clear Time (g_c+I1), s	8.4	12.1	6.7	11.3	15.0	19.4			
Green EXT Time (g_e), s	0.7	9.7	0.0	0.5	8.6	1.5			
Intersection Summary									
HCM 6th Ctrl Delay	13.4								
HCM 6th LOS	B								

Smoke Tree Resort
2020 Total PM

2: Quail Run Rd & Lincoln Drive
Timings

	EBL	EBT	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBT	NBL	NBT	SBL	SBT
Lane Configurations	5	4	4	4	4	4	4
Traffic Volume (vph)	85	904	945	1	0	14	0
Future Volume (vph)	85	904	945	1	0	14	0
Turn Type	pm-plt	NA	NA	Perm	NA	Perm	NA
Protected Phases	7	4	8	2	2	6	6
Permitted Phases	4	4	8	2	2	6	6
Detector Phase							
Switch Phase							
Minimum Initial (s)	3.5	15.0	15.0	7.0	7.0	7.0	7.0
Minimum Split (s)	8.0	28.0	28.0	33.0	33.0	33.0	33.0
Total Split (s)	20.0	94.0	74.0	36.0	36.0	36.0	36.0
Total Split (%)	15.4%	72.3%	56.9%	27.7%	27.7%	27.7%	27.7%
Yellow Time (s)	3.0	4.0	4.0	4.5	4.5	4.5	4.5
All-Red Time (s)	1.0	2.5	2.5	1.5	1.5	1.5	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.5	6.5	6.0	6.0	6.0	6.0
Lead/Lag	Lead		Lag				
Lead-Lag Optimize?	Yes		Yes				
Recall Mode	None		None				
Act Effct Green (s)	68.0	65.5	51.3	52.0	52.0	52.0	52.0
Actuated g/C Ratio	0.52	0.50	0.39	0.40	0.40	0.40	0.40
v/c Ratio	0.42	0.56	0.77	0.00	0.03	0.13	0.13
Control Delay	29.9	35.0	44.1	0.0	28.9	0.3	0.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	29.9	35.0	44.1	0.0	28.9	0.3	0.3
LOS	C	C	D	A	C	A	A
Approach Delay		34.5	44.1			4.2	
Approach LOS		C	D			A	
Intersection Summary							
Cycle Length: 130							
Actuated Cycle Length: 130							
Offset: 0 (0%), Referenced to phase 2:NBLT and 6:SBTL, Start of Green							
Natural Cycle: 70							
Control Type: Actuated-Coordinated							
Maximum v/c Ratio: 0.77							
Intersection Signal Delay: 37.4							
Intersection Capacity Utilization 59.2%							
Analysis Period (min) 15							

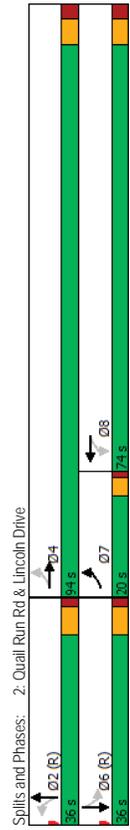

Smoke Tree Resort
2020 Total PM

2: Quail Run Rd & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (veh/h)	85	904	2	0	945	25	1	0	2	14	0	93
Future Volume (veh/h)	85	904	2	0	945	25	1	0	2	14	0	93
Initial Q (Obs.) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No		No		No		No		No		No	
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	94	1004	2	0	1050	28	1	0	2	16	0	103
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	182	1571	3	55	1250	33	251	17	462	726	0	748
Arrive On Green	0.09	0.86	0.86	0.00	0.35	0.35	0.47	0.00	0.47	0.47	0.00	0.47
Sat Flow, veh/h	1781	3639	7	560	3536	94	453	36	978	1415	0	1585
Grp Volume(v), veh/h	94	490	516	0	528	550	3	0	16	0	103	0
Grp Sat Flow(s), veh/h	1781	1777	1869	560	1777	1853	1468	0	0	1415	0	1585
Q Serve(g_s), s	4.3	10.9	10.9	0.0	35.5	35.5	4.8	0.0	0.0	0.0	0.0	4.8
Cycle Q Clear(g_c), s	4.3	10.9	10.9	0.0	35.5	35.5	4.8	0.0	0.0	0.0	0.0	4.8
Prop In Lane	1.00	0.00	1.00	0.00	1.00	0.05	0.33	0.00	0.67	1.00	0.00	1.00
V/C Ratio(X)	0.52	0.64	0.64	0.00	0.84	0.84	0.00	0.00	0.00	0.02	0.00	0.14
Avail Cap(c_a), veh/h	317	1196	1258	148	923	962	730	0	0	726	0	748
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(0)	0.93	0.93	0.93	0.00	1.00	1.00	1.00	0.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	28.4	5.8	5.8	0.0	38.6	38.6	18.2	0.0	0.0	18.3	0.0	19.4
Incr Delay (d2), s/veh	2.1	0.8	0.8	0.0	4.6	4.6	0.0	0.0	0.0	0.1	0.0	0.4
Initial Q Delay(g3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackQ(50%), veh/h	1.8	2.4	2.5	0.0	16.2	16.8	0.1	0.0	0.0	0.3	0.0	1.9
Unsig. Movement Delay, s/veh												
LnGrp Delay(d) s/veh	30.5	6.6	6.6	0.0	43.3	43.1	18.2	0.0	0.0	18.4	0.0	19.8
LnGrp LOS	C	A	A	A	D	D	B	A	A	B	A	B
Approach Vol, veh/h	1100			1078			3			119		
Approach Delay, s/veh	8.6			43.2			18.2			19.6		
Approach LOS	A			D			B			B		
Timer - Assigned Phs	2	4	4	6	7	8						
Phs Duration (G+Y+Rc), s	67.4	62.6	62.6	67.4	10.2	52.5						
Change Period (Y+Rc), s	6.0	6.5	6.5	6.0	4.0	6.5						
Max Green Setting (Gmax), s	30.0	87.5	87.5	30.0	16.0	67.5						
Max Q Clear Time (g_c+I1), s	6.8	12.9	12.9	6.8	6.3	37.5						
Green Ext Time (g_c), s	0.0	8.5	8.5	0.6	0.1	8.5						
Intersection Summary												
HCM 6th Ctrl Delay	25.4 C											
HCM 6th LOS												

Smoke Tree Resort
2020 Total PM

4: Smoke Tree Access B & Lincoln Dr
HCM 6th TWSC

Intersection	EBT	EBR	WBL	WBT	NBL	NBR
Init Delay, s/veh	0.7					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↑	↑	↑↑	↑	↑
Traffic Vol, veh/h	901	20	36	953	18	34
Future Vol, veh/h	901	20	36	953	18	34
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	25	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1001	22	40	1059	20	38
Major/Minor	Major1	Major2	Minor1	Minor2	Minor1	Minor2
Conflicting Flow All	0	0	1023	0	1622	512
Stage 1	-	-	-	-	1012	-
Stage 2	-	-	-	-	610	-
Critical Hdwy	-	-	4.14	-	6.84	6.94
Critical Hdwy Stg 1	-	-	-	-	5.84	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-
Follow-up Hdwy	-	-	2.22	-	3.52	3.32
Pl Cap-1 Maneuver	-	-	674	-	94	507
Stage 1	-	-	-	-	312	-
Stage 2	-	-	-	-	505	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	674	-	88	507
Mov Cap-2 Maneuver	-	-	-	-	202	-
Stage 1	-	-	-	-	294	-
Stage 2	-	-	-	-	505	-
Approach	EB	WB	WB	NB	NB	
HCM Control Delay, s	0	0.4	0.4	18.1	18.1	
HCM LOS				C	C	
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	333	-	-	674	-	
HCM Lane V/C Ratio	0.174	-	-	0.059	-	
HCM Control Delay (s)	18.1	-	-	10.7	-	
HCM Lane LOS	C	-	-	B	-	
HCM 95th %ile Q(veh)	0.6	-	-	0.2	-	

Smoke Tree Resort
2020 Total PM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	EBT	EBR	WBL	WBT	NBL	NBR
Init Delay, s/veh	0.7					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↑	↑	↑↑	↑	↑
Traffic Vol, veh/h	928	7	21	959	30	26
Future Vol, veh/h	928	7	21	959	30	26
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	25	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1031	8	23	1066	33	29
Major/Minor	Major1	Major2	Minor1	Minor2	Minor1	Minor2
Conflicting Flow All	0	0	1039	0	1614	520
Stage 1	-	-	-	-	1035	-
Stage 2	-	-	-	-	579	-
Critical Hdwy	-	-	4.14	-	6.84	6.94
Critical Hdwy Stg 1	-	-	-	-	5.84	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-
Follow-up Hdwy	-	-	2.22	-	3.52	3.32
Pl Cap-1 Maneuver	-	-	665	-	95	501
Stage 1	-	-	-	-	303	-
Stage 2	-	-	-	-	524	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	665	-	92	501
Mov Cap-2 Maneuver	-	-	-	-	207	-
Stage 1	-	-	-	-	292	-
Stage 2	-	-	-	-	524	-
Approach	EB	WB	WB	NB	NB	
HCM Control Delay, s	0	0.2	0.2	21.1	21.1	
HCM LOS				C	C	
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	
Capacity (veh/h)	285	-	-	665	-	
HCM Lane V/C Ratio	0.218	-	-	0.035	-	
HCM Control Delay (s)	21.1	-	-	10.6	-	
HCM Lane LOS	C	-	-	B	-	
HCM 95th %ile Q(veh)	0.8	-	-	0.1	-	

Smoke Tree Resort
2020 Total PM

6: Lincoln Medical East & Lincoln Dr
HCM 6th TWSC

Intersection	EBT	EBR	WBL	WBT	NBL	NBR	Initial Delay, s/veh
Initial Delay, s/veh							0.2
Movement	EBT	EBR	WBL	WBT	NBL	NBR	
Lane Configurations	↖	↖	↖	↖	↖	↖	
Traffic Vol, veh/h	950	4	0	979	2	30	
Future Vol, veh/h	950	4	0	979	2	30	
Conflicting Peds, #/hr	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Stop	Stop	
RT Channelized	-	None	-	None	-	None	
Storage Length	-	-	-	-	-	0	
Veh in Median Storage, #	0	-	-	0	0	-	
Grade, %	0	-	-	0	0	-	
Peak Hour Factor	90	90	90	90	90	90	
Heavy Vehicles, %	2	2	2	2	2	2	
Mvmt Flow	1056	4	0	1088	2	33	
Major/Minor	Major1	Major2	Minor1				
Conflicting Flow All	0	0	-	1602	530	-	
Stage 1	-	-	-	1068	-	-	
Stage 2	-	-	-	544	-	-	
Critical Hdwy	-	-	-	6.84	6.94	-	
Critical Hdwy Stg 1	-	-	-	5.84	-	-	
Critical Hdwy Stg 2	-	-	-	5.84	-	-	
Follow-up Hdwy	-	-	-	3.52	3.32	-	
Pot Cap-1 Maneuver	-	0	-	96	493	-	
Stage 1	-	0	-	295	-	-	
Stage 2	-	0	-	546	-	-	
Platoon blocked, %	-	-	-	-	-	-	
Mov Cap-1 Maneuver	-	-	-	96	493	-	
Mov Cap-2 Maneuver	-	-	-	214	-	-	
Stage 1	-	-	-	295	-	-	
Stage 2	-	-	-	546	-	-	
Approach	EB	WB	NB				
HCM Control Delay, s	0	0	12.8				
HCM LOS				B			
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBT			
Capacity (veh/h)	493	-	-	-	-	-	
HCM Lane V/C Ratio	0.068	-	-	-	-	-	
HCM Control Delay (s)	12.8	-	-	-	-	-	
HCM Lane LOS	B	-	-	-	-	-	
HCM 95th %ile Q(veh)	0.2	-	-	-	-	-	

Smoke Tree Resort
2020 Total PM

7: Apartment Drwy & Lincoln Dr
HCM 6th TWSC

Intersection	EBT	EBR	WBL	WBT	NBL	NBR	Initial Delay, s/veh
Initial Delay, s/veh							15.8
Movement	EBT	EBR	WBL	WBT	NBL	NBR	
Lane Configurations	↖	↖	↖	↖	↖	↖	
Traffic Vol, veh/h	7	918	42	6	883	9	
Future Vol, veh/h	7	918	42	6	883	9	
Conflicting Peds, #/hr	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Stop	Stop	
RT Channelized	-	None	-	None	-	None	
Storage Length	25	-	-	25	-	-	
Veh in Median Storage, #	0	-	-	0	-	-	
Grade, %	0	-	-	0	-	-	
Peak Hour Factor	90	90	90	90	90	90	
Heavy Vehicles, %	2	2	2	2	2	2	
Mvmt Flow	8	1020	47	7	981	10	
Major/Minor	Major1	Major2	Minor1	Minor2			
Conflicting Flow All	991	0	0	1067	0	1565	
Stage 1	-	-	-	1060	1060	-	
Stage 2	-	-	-	505	1005	-	
Critical Hdwy	4.14	-	-	4.14	-	-	
Critical Hdwy Stg 1	-	-	-	6.54	6.94	-	
Critical Hdwy Stg 2	-	-	-	6.54	6.54	-	
Follow-up Hdwy	2.22	-	-	2.22	4.02	3.32	
Pot Cap-1 Maneuver	693	-	-	649	-	-	
Stage 1	-	-	-	239	299	-	
Stage 2	-	-	-	518	317	-	
Platoon blocked, %	-	-	-	-	-	-	
Mov Cap-1 Maneuver	693	-	-	649	-	-	
Mov Cap-2 Maneuver	-	-	-	-	-	-	
Stage 1	-	-	-	236	295	-	
Stage 2	-	-	-	474	314	-	
Approach	EB	WB	NB	SB			
HCM Control Delay, s	0.1	0.1	258	21.4			
HCM LOS				F			
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	WBL	WBT	WBR	
Capacity (veh/h)	104	693	-	-	649	-	
HCM Lane V/C Ratio	1.282	0.011	-	-	0.01	-	
HCM Control Delay (s)	258	10.3	-	-	10.6	-	
HCM Lane LOS	F	B	-	-	B	-	
HCM 95th %ile Q(veh)	9.1	0	-	-	0	-	

Smoke Tree Resort
2020 Total PM

9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	527	56	446	56	62	72	427	1624	45	61	1569	505
Traffic Volume (veh/h)	527	56	446	56	62	72	427	1624	45	61	1569	505
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0	0	0	0
Initial Q (Q _{bb}) veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pb1)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	No	No	No	No	No	No	No	No	No	No	No	No
Work Zone On Approach	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Sat Flow, veh/hln	630	0	496	62	69	80	474	1804	50	68	1743	561
Adj Flow Rate, veh/h	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Peak Hour Factor	2	2	2	2	2	2	2	2	2	2	2	2
Percent Heavy Veh, %	671	0	543	101	101	90	532	2561	71	87	2015	924
Cap, veh/h	0.06	0.00	0.06	0.06	0.06	0.06	0.15	0.50	0.50	0.05	0.39	0.39
Arrive On Green	3563	0	1585	1781	1777	1585	3456	5107	141	1781	5106	1585
Sat Flow, veh/h	1781	0	1585	1781	1777	1585	1728	1702	1845	1781	1702	1585
Grp Sat Flow(s),veh/hln	22.9	0.0	24.5	4.4	5.0	6.5	17.5	35.4	35.4	4.9	40.8	29.7
Q Serve(g_s), s	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.08	1.00	1.00	1.00
Prop In Lane	671	0	543	101	101	90	532	1707	925	87	2015	924
Lane Grp Cap(c), veh/h	0.94	0.00	0.91	0.61	0.68	0.89	0.89	0.70	0.70	0.78	0.87	0.61
V/C Ratio(X)	671	0	543	101	101	90	651	1762	955	119	2015	924
Avail Cap(c), veh/h	0.33	0.33	0.33	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
HCM Platoon Ratio	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	60.2	0.0	46.0	59.9	60.1	60.9	53.9	25.0	25.0	61.2	36.2	17.5
Uniform Delay (d), s/veh	20.7	0.0	19.7	7.6	14.4	57.9	11.3	1.0	1.9	13.9	5.3	3.0
Incr Delay (d2), s/veh	12.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%)veh/h	80.9	0.0	17.6	2.2	2.6	4.1	8.4	14.3	15.7	2.6	17.7	17.2
Unsig. Movement Delay, s/veh	80.9	0.0	65.7	74.6	118.8	65.2	26.0	26.9	75.1	41.4	20.4	20.4
LnGrp Delay(d),s/veh	F	A	E	E	E	F	E	C	C	E	D	C
LnGrp LOS	F	A	E	E	E	F	E	C	C	E	D	C
Approach Vol, veh/h	1126			211			2328				2372	
Approach Delay, s/veh	74.2			89.3			34.2				37.4	
Approach LOS	E			F			C				D	
Timer - Assigned Phs	1	2	4	5	6	8						
Phs Duration (G+Y+R), s	11.6	70.9	30.0	25.5	57.0	13.0						
Change Period (Y+R), s	* 5.3	5.7	5.5	5.5	5.7	5.6						
Max Green Stalling (Gmax), s	* 8.7	67.3	24.5	24.5	51.3	7.4						
Max Q Clear Time (g_c+1t), s	6.9	37.4	26.5	19.5	42.8	8.5						
Green Ext Time (p_c), s	0.0	2.9	0.0	0.5	2.5	0.0						

Intersection Summary
HCM 6th Ctrl Delay 44.9
HCM 6th LOS D

Notes
User approved pedestrian interval to be less than phase max green.
User approved volume balancing among the lanes for turning movement.
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.

Smoke Tree Resort
2020 Total PM

10: Quail Run Rd & Access A
HCM 6th TWSC

Intersection	WBL	WBR	NBT	NBR	SBL	SBT
In Delay, s/veh	0					
Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W	W	T	T	T	T
Traffic Vol, veh/h	0	1	0	0	1	0
Future Vol, veh/h	0	1	0	0	1	0
Initial Q (Q _{bb}) veh	0	0	0	0	0	0
Ped-Bike Adj(A_pb1)	0	0	0	0	0	0
Parking Bus, Adj	0	0	0	0	0	0
Work Zone On Approach	0	0	0	0	0	0
Adj Sat Flow, veh/hln	0	0	0	0	0	0
Adj Flow Rate, veh/h	0	0	0	0	0	0
Peak Hour Factor	0	0	0	0	0	0
Percent Heavy Veh, %	0	0	0	0	0	0
Cap, veh/h	0	0	0	0	0	0
Arrive On Green	0	0	0	0	0	0
Sat Flow, veh/h	0	0	0	0	0	0
Grp Sat Flow(s),veh/hln	0	0	0	0	0	0
Q Serve(g_s), s	0	0	0	0	0	0
Prop In Lane	0	0	0	0	0	0
Lane Grp Cap(c), veh/h	0	0	0	0	0	0
V/C Ratio(X)	0	0	0	0	0	0
Avail Cap(c), veh/h	0	0	0	0	0	0
HCM Platoon Ratio	0	0	0	0	0	0
Upstream Filter(i)	0	0	0	0	0	0
Uniform Delay (d), s/veh	0	0	0	0	0	0
Incr Delay (d2), s/veh	0	0	0	0	0	0
%ile BackOfQ(50%)veh/h	0	0	0	0	0	0
Unsig. Movement Delay, s/veh	0	0	0	0	0	0
LnGrp Delay(d),s/veh	0	0	0	0	0	0
LnGrp LOS	0	0	0	0	0	0
Approach Vol, veh/h	0	0	0	0	0	0
Approach Delay, s/veh	0	0	0	0	0	0
Approach LOS	0	0	0	0	0	0
Timer - Assigned Phs	0	0	0	0	0	0
Phs Duration (G+Y+R), s	0	0	0	0	0	0
Change Period (Y+R), s	0	0	0	0	0	0
Max Green Stalling (Gmax), s	0	0	0	0	0	0
Max Q Clear Time (g_c+1t), s	0	0	0	0	0	0
Green Ext Time (p_c), s	0	0	0	0	0	0

Intersection Summary
HCM 6th Ctrl Delay 0
HCM 6th LOS 0

Notes
User approved pedestrian interval to be less than phase max green.
User approved volume balancing among the lanes for turning movement.
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.


APPENDIX H

2025 PEAK HOUR ANALYSIS

Smoke Tree Resort
2025 Background AM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL
Lane Configurations	4	4	4	4	4	4	4
Traffic Volume (vph)	242	1045	24	963	6	37	83
Future Volume (vph)	242	1045	24	963	6	37	83
Turn Type	pm-plt	NA	Perm	NA	pm-plt	NA	NA
Protected Phases	1	6	2	2	4	3	8
Permitted Phases	6	6	2	2	4	4	8
Detector Phase	1	6	2	2	4	4	3
Switch Phase							
Minimum Initial (s)	3.5	15.0	15.0	7.0	7.0	3.5	7.0
Minimum Split (s)	8.0	27.0	27.0	33.5	33.5	8.0	33.5
Total Split (s)	27.0	77.0	50.0	50.0	44.0	9.0	53.0
Total Split (%)	20.8%	59.2%	38.5%	38.5%	33.8%	6.9%	40.8%
Yellow Time (s)	3.0	4.5	4.5	4.0	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	2.5	2.5	1.0	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.5	6.5	4.0	6.5
Lead/Lag	Lead	Lag	Lag	Lag	Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	90.6	88.6	65.5	65.5	19.6	31.4	28.9
Actuated g/C Ratio	0.70	0.68	0.50	0.50	0.15	0.24	0.22
v/C Ratio	0.66	0.50	0.12	0.63	0.09	0.23	0.30
Control Delay	21.5	12.0	22.8	30.5	44.3	30.9	39.7
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	21.5	12.0	22.8	30.5	44.3	30.9	39.7
LOS	C	B	C	C	D	C	D
Approach Delay		13.7		30.3		32.1	48.5
Approach LOS		B		C		C	D
Intersection Summary							
Cycle Length: 130							
Actuated Cycle Length: 130							
Offset: 0 (0%), Referenced to phase 2:WBL and 6:EBTL, Start of Green							
Natural Cycle: 90							
Control Type: Actuated-Coordinated							
Maximum v/c Ratio: 0.85							
Intersection Signal Delay: 25.4							
Intersection Capacity Utilization 78.5%							
Analysis Period (min) 15							

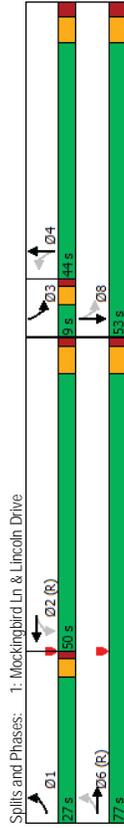

Smoke Tree Resort
2025 Background AM


1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (veh/h)	242	1045	33	24	963	46	6	37	23	83	96	253
Future Volume (veh/h)	242	1045	33	24	963	46	6	37	23	83	96	253
Initial Q (Obs.) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No											
Adj Sat Flow (veh/h)	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate	269	1161	37	27	1070	51	7	41	26	92	107	281
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh. %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	347	2365	72	274	1821	87	88	204	129	335	118	311
Arrive On Green	0.09	0.64	0.64	0.35	0.35	0.35	0.19	0.19	0.19	0.04	0.26	0.26
Sat Flow (veh/h)	1781	3515	112	467	3453	165	996	1070	678	1781	456	1198
Grp Volume(v) veh/h	269	587	611	27	550	571	7	0	67	92	0	388
Grp Sat Flow(s) veh/h	1781	1777	1850	467	1777	1841	996	0	1748	1781	0	1655
Q Serve(g_s) s	8.6	22.8	22.8	5.4	32.9	32.9	0.9	0.0	4.2	5.0	0.0	29.5
Cycle O Clear(g_c) s	8.6	22.8	22.8	13.0	32.9	32.9	21.4	0.0	4.2	5.0	0.0	29.5
Prop In Lane	1.00	0.06	1.00	1.00	0.09	1.00	0.09	1.00	0.39	1.00	0.00	0.72
V/C Ratio(X)	0.78	0.51	0.51	0.10	0.59	0.59	0.08	0.00	0.20	0.27	0.00	0.90
Avail Cap(c_a) veh/h	508	1145	1192	274	937	971	186	0	504	335	0	592
HCM Platoon Ratio	1.00	1.00	1.00	0.67	0.67	0.67	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(0)	1.00	1.00	1.00	0.55	0.55	0.55	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d) s/veh	20.5	12.3	12.3	26.8	30.5	30.5	61.3	0.0	44.3	39.7	0.0	46.6
Incr Delay (d2) s/veh	4.5	1.6	1.6	0.4	1.5	1.4	0.4	0.0	0.3	0.4	0.0	13.7
Initial Q Delay(g3) s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackQ(50%) veh/h	4.4	9.2	9.6	0.7	15.3	15.8	0.2	0.0	1.9	2.4	0.0	13.7
Unsig. Movement Delay, s/veh												
LnGrp Delay(d) s/veh	25.0	13.9	13.9	27.2	32.0	31.9	61.6	0.0	44.6	40.1	0.0	60.3
LnGrp LOS	C	B	B	C	C	C	E	A	D	D	A	E
Approach Vol. veh/h		1467		1148		74		480				
Approach Delay, s/veh		15.9		31.8		46.2		56.4				
Approach LOS		B		C		D		E				
Timer - Assigned Phs	1	2	3	4	6	8						
Phs Duration (G+Y+Rc) s	15.2	74.6	9.0	31.2	89.8	40.2						
Change Period (Y+Rc) s	4.0	6.0	4.0	6.5	6.0	6.5						
Max Green Selling (Gmax) s	23.0	44.0	5.0	37.5	71.0	46.5						
Max Q Clear Time (g_c+I1) s	10.6	34.9	7.0	23.4	24.8	31.5						
Green Ext Time (g_e) s	0.6	5.0	0.0	0.2	10.9	2.2						
Intersection Summary												
HCM 6th Ctrl Delay	28.5											
HCM 6th LOS	C											

Smoke Tree Resort
2025 Background AM

2: Quail Run Rd & Lincoln Drive
Timings

	EBT	WBL	WBT	NBT	SBL	SBT
Lane Group	EBT	WBL	WBT	NBT	SBL	SBT
Lane Configurations	115	1104	2	927	0	26
Traffic Volume (vph)	115	1104	2	927	0	26
Future Volume (vph)	pm-plt	NA	Perm	NA	Perm	NA
Turn Type	7	4	8	2	6	6
Protected Phases	4	8	8	2	6	6
Permitted Phases	7	4	8	2	6	6
Detector Phase	7	4	8	2	6	6
Switch Phase	7	4	8	2	6	6
Minimum Initial (s)	3.5	15.0	15.0	7.0	7.0	7.0
Minimum Split (s)	8.0	28.0	28.0	33.0	33.0	33.0
Total Split (s)	20.0	94.0	74.0	36.0	36.0	36.0
Total Split (%)	15.4%	72.3%	56.9%	56.9%	27.7%	27.7%
Yellow Time (s)	3.0	4.0	4.0	4.5	4.5	4.5
All-Red Time (s)	1.0	2.5	2.5	1.5	1.5	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.5	6.5	6.0	6.0	6.0
Lead/Lag	Lead	Lag	Lag	Lag	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	C-Max	C-Max	C-Max
Act Effct Green (s)	67.4	64.9	50.0	50.0	52.6	52.6
Actuated g/C Ratio	0.52	0.50	0.38	0.38	0.40	0.40
v/c Ratio	0.54	0.70	0.02	0.77	0.01	0.05
Control Delay	28.5	35.5	21.5	38.6	0.0	28.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	28.5	35.5	21.5	38.6	0.0	28.2
LOS	C	D	C	D	A	C
Approach Delay	C	A	C	D	A	C
Approach LOS	C	A	C	D	A	C
Intersection Summary						
Cycle Length: 130						
Actuated Cycle Length: 130						
Offset: 0 (0%), Referenced to phase 2:NBT and 6:SBTL, Start of Green						
Natural Cycle: 70						
Control Type: Actuated-Coordinated						
Maximum v/c Ratio: 0.77						
Intersection Signal Delay: 35.2						
Intersection Capacity Utilization 67.1%						
Analysis Period (min) 15						

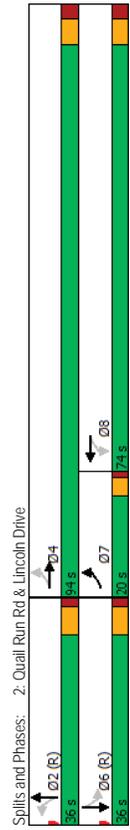

Smoke Tree Resort
2025 Background AM

2: Quail Run Rd & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Movement	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Configurations	115	1104	3	2	927	0	0	8	26
Traffic Volume (veh/h)	115	1104	3	2	927	0	0	8	26
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0
Initial Q (Obs), veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pbT)	No								
Work Zone On Approach	No								
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	128	1227	3	2	1030	13	0	9	29
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2
Cap. veh/h	208	1582	4	191	1231	16	0	743	710
Arrive On Green	0.12	0.87	0.34	0.34	0.34	0.00	0.00	0.47	0.00
Sat Flow, veh/h	1781	3637	9	453	3594	45	0	1885	1406
Grp Volume(v), veh/h	128	599	631	2	509	534	0	9	29
Grp Sat Flow(s), veh/h	1781	1777	1869	453	1777	1862	0	1585	1406
Q Serve(g_s), s	5.9	17.6	17.6	0.4	34.3	34.3	0.0	0.4	1.5
Cycle O Clear(g_c), s	5.9	17.6	17.6	5.9	34.3	34.3	0.0	0.4	1.9
Prop In Lane	1.00	0.00	1.00	0.00	0.02	0.00	0.00	1.00	1.00
VC Ratio(X)	208	773	813	191	609	638	0	743	710
Avail Cap(c_a), veh/h	0.62	0.78	0.78	0.01	0.84	0.84	0.00	0.01	0.04
HCM Platoon Ratio	317	1796	1258	271	923	967	0	743	710
Upstream Filter(0)	0.87	0.87	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	28.2	5.9	5.9	32.0	39.4	39.4	0.0	18.4	18.9
Incr Delay (d2), s/veh	2.6	1.5	1.4	0.0	4.3	4.1	0.0	0.0	0.1
Initial Q Delay(g3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(50%), veh/h	2.5	2.9	3.1	0.0	15.6	16.3	0.0	0.2	0.5
Unsig. Movement Delay, s/veh	30.7	7.4	7.4	32.0	43.7	43.5	0.0	18.5	19.0
LnGrp Delay(d) s/veh	C	A	A	C	D	A	A	B	A
LnGrp LOS	C	A	A	C	D	A	A	B	A
Approach Vol, veh/h	1358	1045						9	102
Approach Delay, s/veh	9.6	43.5						18.5	19.4
Approach LOS	A	D						B	B
Timer - Assigned Phs	2	4	4	6	7	8			
Phs Duration (G+Y+Rc), s	67.0	63.0	63.0	67.0	120	51.0			
Change Period (Y+Rc), s	6.0	6.5	6.5	6.0	4.0	6.5			
Max Green Setting (Gmax), s	30.0	87.5	87.5	30.0	16.0	67.5			
Max Q Clear Time (g_c+I1), s	2.4	19.6	19.6	5.3	7.9	36.3			
Green Ext Time (g_e), s	0.0	11.9	11.9	0.4	0.2	8.2			
Intersection Summary									
HCM 6th Ctrl Delay	24.1								
HCM 6th LOS	C								

Smoke Tree Resort
2025 Background AM

3: Smoke Tree West & Lincoln Dr
HCM 6th TWSC

Intersection											
Int Delay, s/veh	0										
Movement	EBT	EBR	WBL	WBT	NBL	NBR					
Lane Configurations	↕	↕	↕	↕	↕	↕					
Traffic Vol, veh/h	1135	2	0	937	0	0					
Future Vol, veh/h	1135	2	0	937	0	0					
Conflicting Peds, #/hr	0	0	0	0	0	0					
Sign Control	Free	Free	Free	Free	Stop	Stop					
RT Channelized	-	None	-	None	-	None					
Storage Length	-	-	25	-	0	-					
Veh in Median Storage, #	0	-	-	0	0	-					
Grade, %	0	-	-	0	0	-					
Peak Hour Factor	90	90	90	90	90	90					
Heavy Vehicles, %	2	2	2	2	2	2					
Mvmt Flow	1261	2	0	1041	0	0					
Major/Minor	Major1	Major2	Minor1								
Conflicting Flow All	0	0	1263	0	1783	632					
Stage 1	-	-	-	1262	-	-					
Stage 2	-	-	-	-	521	-					
Critical Hdwy	-	-	4.14	-	6.84	6.94					
Critical Hdwy Stg 1	-	-	-	-	5.84	-					
Critical Hdwy Stg 2	-	-	-	-	5.84	-					
Follow-up Hdwy	-	-	2.22	-	3.52	3.32					
Pot Cap-1 Maneuver	-	-	546	-	73	423					
Stage 1	-	-	-	-	230	-					
Stage 2	-	-	-	-	561	-					
Platoon blocked, %	-	-	-	-	-	-					
Mov Cap-1 Maneuver	-	-	546	-	73	423					
Mov Cap-2 Maneuver	-	-	-	-	175	-					
Stage 1	-	-	-	-	230	-					
Stage 2	-	-	-	-	561	-					
Approach	EB	WB	NB								
HCM Control Delay, s	0	0	0								
HCM LOS				A							
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT						
Capacity (veh/h)	-	-	-	-	546	-					
HCM Lane V/C Ratio	-	-	-	-	-	-					
HCM Control Delay (s)	0	-	-	-	0	-					
HCM Lane LOS	A	-	-	-	A	-					
HCM 95th %tile Q(veh)	-	-	-	-	0	-					

Smoke Tree Resort
2025 Background AM

4: Smoke Tree East & Lincoln Dr
HCM 6th TWSC

Intersection											
Int Delay, s/veh	0.1										
Movement	EBT	EBR	WBL	WBT	NBL	NBR					
Lane Configurations	↕	↕	↕	↕	↕	↕					
Traffic Vol, veh/h	1137	0	1	934	6	2					
Future Vol, veh/h	1137	0	1	934	6	2					
Conflicting Peds, #/hr	0	0	0	0	0	0					
Sign Control	Free	Free	Free	Free	Stop	Stop					
RT Channelized	-	None	-	None	-	None					
Storage Length	-	-	25	-	0	-					
Veh in Median Storage, #	0	-	-	0	0	-					
Grade, %	0	-	-	0	0	-					
Peak Hour Factor	90	90	90	90	90	90					
Heavy Vehicles, %	2	2	2	2	2	2					
Mvmt Flow	1263	0	1	1038	7	2					
Major/Minor	Major1	Major2	Minor1								
Conflicting Flow All	0	0	1263	0	1784	632					
Stage 1	-	-	-	1263	-	-					
Stage 2	-	-	-	-	521	-					
Critical Hdwy	-	-	4.14	-	6.84	6.94					
Critical Hdwy Stg 1	-	-	-	-	5.84	-					
Critical Hdwy Stg 2	-	-	-	-	5.84	-					
Follow-up Hdwy	-	-	2.22	-	3.52	3.32					
Pot Cap-1 Maneuver	-	-	546	-	73	423					
Stage 1	-	-	-	-	230	-					
Stage 2	-	-	-	-	561	-					
Platoon blocked, %	-	-	-	-	-	-					
Mov Cap-1 Maneuver	-	-	546	-	73	423					
Mov Cap-2 Maneuver	-	-	-	-	175	-					
Stage 1	-	-	-	-	230	-					
Stage 2	-	-	-	-	561	-					
Approach	EB	WB	NB								
HCM Control Delay, s	0	0	0								
HCM LOS				C							
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT						
Capacity (veh/h)	205	-	-	-	546	-					
HCM Lane V/C Ratio	0.043	-	-	-	0.002	-					
HCM Control Delay (s)	23.4	-	-	-	11.6	-					
HCM Lane LOS	C	-	-	-	B	-					
HCM 95th %tile Q(veh)	0.1	-	-	-	0	-					

Smoke Tree Resort
2025 Background AM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	EBT	EBR	WBL	WBT	NBL	NBR
Int'l Delay, s/veh	0.4					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↑	↑	↑↑	↑	↑
Traffic Vol, veh/h	1122	18	42	928	6	9
Future Vol, veh/h	1122	18	42	928	6	9
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	25	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1247	20	47	1031	7	10
Major/Minor	Major1	Major2	Minor1		Minor1	
Conflicting Flow All	0	0	1267	0	1867	634
Stage 1	-	-	-	-	1257	-
Stage 2	-	-	-	-	610	-
Critical Hdwy	-	-	4.14	-	6.84	6.94
Critical Hdwy Stg 1	-	-	-	-	5.84	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-
Follow-up Hdwy	-	-	2.22	-	3.52	3.32
Pl Cap-1 Maneuver	-	-	544	-	64	422
Stage 1	-	-	-	-	231	-
Stage 2	-	-	-	-	505	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	544	-	58	422
Mov Cap-2 Maneuver	-	-	-	-	154	-
Stage 1	-	-	-	-	211	-
Stage 2	-	-	-	-	505	-
Approach	EB	WB	NB		NB	
HCM Control Delay, s	0	0.5	20.5		20.5	
HCM LOS	C					
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	WBT
Capacity (veh/h)	249	-	-	544	-	-
HCM Lane V/C Ratio	0.067	-	-	0.086	-	-
HCM Control Delay (s)	20.5	-	-	12.2	-	-
HCM Lane LOS	C	-	-	B	-	-
HCM 95th %tile Q(veh)	0.2	-	-	0.3	-	-

Smoke Tree Resort
2025 Background AM

6: Lincoln Medical East & Lincoln Dr
HCM 6th TWSC

Intersection	EBT	EBR	WBL	WBT	NBL	NBR
Int'l Delay, s/veh	0.1					
Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↑↑	↑	↑	↑↑	↑	↑
Traffic Vol, veh/h	1118	11	6	970	0	9
Future Vol, veh/h	1118	11	6	970	0	9
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	25	-	0	-
Veh in Median Storage, #	0	-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	1242	12	7	1078	0	10
Major/Minor	Major1	Major2	Minor1		Minor1	
Conflicting Flow All	0	0	1254	0	1801	627
Stage 1	-	-	-	-	1248	-
Stage 2	-	-	-	-	553	-
Critical Hdwy	-	-	4.14	-	6.84	6.94
Critical Hdwy Stg 1	-	-	-	-	5.84	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-
Follow-up Hdwy	-	-	2.22	-	3.52	3.32
Pl Cap-1 Maneuver	-	-	551	-	71	426
Stage 1	-	-	-	-	234	-
Stage 2	-	-	-	-	540	-
Platoon blocked, %	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	551	-	70	426
Mov Cap-2 Maneuver	-	-	-	-	173	-
Stage 1	-	-	-	-	231	-
Stage 2	-	-	-	-	540	-
Approach	EB	WB	NB		NB	
HCM Control Delay, s	0	0.1	13.7		13.7	
HCM LOS	B					
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	WBT
Capacity (veh/h)	426	-	-	551	-	-
HCM Lane V/C Ratio	0.023	-	-	0.012	-	-
HCM Control Delay (s)	13.7	-	-	11.6	-	-
HCM Lane LOS	B	-	-	B	-	-
HCM 95th %tile Q(veh)	0.1	-	-	0	-	-

Smoke Tree Resort
2025 Background AM

7: Apartment Drwy & Lincoln Dr
HCM 6th TWSC

Intersection													
Int Delay, s/veh													
16.7													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	29	1062	38	20	905	11	56	0	33	6	0	14	
Future Vol, veh/h	29	1062	38	20	905	11	56	0	33	6	0	14	
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Stop
RT Channelized	-	-	-	-	-	-	-	-	-	-	-	-	None
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	0
Veh in Median Storage, #	-	0	-	-	0	-	-	-	-	-	-	-	0
Grade, %	-	-	-	-	-	-	-	-	-	-	-	-	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	32	1180	42	22	1006	12	62	0	37	7	0	16	
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	1018	0	0	1222	0	0	1812	2327	611	1710	-	509	
Stage 1	-	-	-	-	-	-	1265	1265	-	1056	-	-	
Stage 2	-	-	-	-	-	-	547	1062	-	654	-	-	
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	-	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	-	3.32	
Pot Cap-1 Maneuver	677	-	-	566	-	-	-49	37	437	59	0	509	
Stage 1	-	-	-	-	-	-	179	239	-	241	0	-	
Stage 2	-	-	-	-	-	-	489	298	-	422	0	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	677	-	-	566	-	-	-44	34	437	51	-	509	
Mov Cap-2 Maneuver	-	-	-	-	-	-	-44	34	-	51	-	-	
Stage 1	-	-	-	-	-	-	171	228	-	230	-	-	
Stage 2	-	-	-	-	-	-	456	286	-	368	-	-	
Approach	EB	WB	NB	SB									
HCM Control Delay, s	0.3	0.2	\$ 393.8	34.4									
HCM LOS			F	D									
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	66	677	-	-	566	-	-	51	509				
HCM Lane V/C Ratio	1.498	0.048	-	-	0.039	-	-	0.131	0.031				
HCM Control Delay (s)	\$ 393.8	10.6	-	-	11.6	-	-	85.9	12.3				
HCM Lane LOS	F	B	-	-	B	-	-	F	B				
HCM 95th %ile Q(veh)	8.5	0.1	-	-	0.1	-	-	0.4	0.1				

Notes
- Volume exceeds capacity \$ Delay exceeds 300s + Computation Not Defined *: All major volume in platoon

Smoke Tree Resort
2025 Background AM

8: AJ's Drwy & Lincoln Dr
HCM 6th TWSC


Intersection													
Int Delay, s/veh													
1.3													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	3	1040	60	48	918	9	7	0	46	5	1	14	
Future Vol, veh/h	3	1040	60	48	918	9	7	0	46	5	1	14	
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Stop
RT Channelized	-	-	-	-	-	-	-	-	-	-	-	-	None
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	0
Veh in Median Storage, #	-	0	-	-	0	-	-	-	-	-	-	-	0
Grade, %	-	-	-	-	-	-	-	-	-	-	-	-	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	3	1156	67	53	1020	10	8	0	51	6	1	16	
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	1030	0	0	1223	0	0	1813	2332	612	1715	2360	515	
Stage 1	-	-	-	-	-	-	1196	1196	-	1131	-	-	
Stage 2	-	-	-	-	-	-	617	1136	-	584	-	-	
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	-	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	-	3.32	
Pot Cap-1 Maneuver	670	-	-	566	-	-	49	36	436	58	35	505	
Stage 1	-	-	-	-	-	-	198	258	-	217	277	-	
Stage 2	-	-	-	-	-	-	444	275	-	465	248	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	670	-	-	566	-	-	43	32	436	47	32	505	
Mov Cap-2 Maneuver	-	-	-	-	-	-	43	32	-	47	32	-	
Stage 1	-	-	-	-	-	-	197	257	-	216	251	-	
Stage 2	-	-	-	-	-	-	388	249	-	409	247	-	
Approach	EB	WB	NB	SB									
HCM Control Delay, s	0	0.6	30.7	33.2									
HCM LOS			D	D									
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	198	670	-	-	566	-	-	47	505				
HCM Lane V/C Ratio	0.297	0.005	-	-	0.094	-	-	0.118	0.031				
HCM Control Delay (s)	30.7	10.4	-	-	12	-	-	91.6	12.4				
HCM Lane LOS	D	B	-	-	B	-	-	F	B				
HCM 95th %ile Q(veh)	1.2	0	-	-	0.3	-	-	0.4	0.1				

Notes
- Volume exceeds capacity \$ Delay exceeds 300s + Computation Not Defined *: All major volume in platoon

Smoke Tree Resort
2025 Background AM

9: Scottsdale Rd & Lincoln Dr
Timings

EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
4	4	4	8	8	5	2	1	6	4
4	4	4	8	8	5	2	1	6	4
7.0	7.0	7.0	7.0	7.0	10.0	10.0	5.0	10.0	7.0
13.0	13.0	13.0	13.0	13.0	13.0	16.7	11.0	16.0	13.0
30.0	30.0	30.0	30.0	30.0	30.0	73.0	14.0	57.0	30.0
23.1%	23.1%	23.1%	10.0%	10.0%	23.1%	56.2%	10.8%	43.8%	23.1%
4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0
1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5
Lead/Lag									
None	None	None	None	None	None	None	None	C-Max	None
24.3	24.3	44.8	7.2	7.2	20.5	70.7	7.7	55.6	88.6
0.19	0.19	0.34	0.06	0.06	0.16	0.54	0.06	0.43	0.66
0.94	0.94	0.94	0.47	0.43	0.65	0.59	0.59	0.93	0.66
88.8	88.7	50.9	75.4	33.9	56.8	21.7	81.5	44.4	13.7
88.8	88.7	50.9	75.4	33.9	56.8	21.7	81.5	44.4	13.7
F	F	D	E	C	E	C	F	D	B
70.4			46.9		27.9		37.3		
Intersection Summary									
Cycle Length: 130									
Actuated Cycle Length: 130									
Offset: 0 (0%), Referenced to phase 6, SBT, Start of Green									
Natural Cycle: 90									
Control Type: Actuated-Coordinated									
Maximum v/c Ratio: 0.94									
Intersection Signal Delay: 40.7									
Intersection Capacity Utilization 85.8%									
Analysis Period (min) 15									

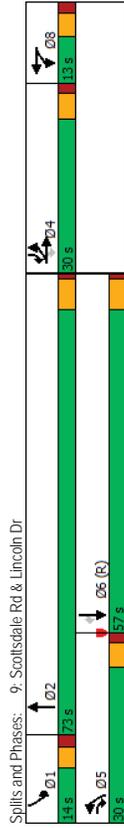

Smoke Tree Resort
2025 Background AM


9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary

EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
489	42	499	41	39	319	1429	43	55	1814
489	42	499	41	39	319	1429	43	55	1814
0	0	0	0	0	0	0	0	0	0
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach									
No									
1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
577	0	554	46	43	58	354	1588	48	61
0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
2	2	2	2	2	2	2	2	2	2
671	0	489	95	85	414	2404	73	78	2015
0.06	0.00	0.06	0.05	0.05	0.12	0.47	0.47	0.04	0.39
3563	0	1585	1781	1777	1585	3456	5093	154	1781
577	0	554	46	43	58	354	1061	575	61
1781	0	1585	1781	1777	1585	1728	1702	1843	1781
20.9	0.0	24.5	3.3	3.1	4.7	13.1	31.1	31.1	4.4
1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.08	1.00	1.00
0.86	0.00	1.13	0.48	0.45	0.68	0.86	0.66	0.66	0.78
671	0	489	101	101	90	651	1762	954	119
0.33	0.33	0.33	1.00	1.00	1.00	1.00	1.00	1.00	1.00
1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
59.3	0.0	50.8	59.8	59.7	60.4	56.1	26.3	26.3	61.5
10.4	0.0	83.0	1.4	1.2	14.2	3.9	0.6	1.1	7.7
11.0	0.0	26.4	1.5	1.4	2.2	5.9	12.6	13.8	2.2
Unsig. Movement Delay, s/veh									
69.7	0.0	133.7	61.2	60.9	74.7	60.0	26.9	27.4	69.2
LnGrp Delay(d)/s/veh									
E	A	F	E	E	E	C	C	E	F
LnGrp LOS									
E									
Approach Vol, veh/h									
1131									
Approach Delay, s/veh									
101.0									
Approach LOS									
F									
Timer - Assigned Phs									
1 2 4 5 6 8									
Phs Duration (G+Y+Rc), s									
11.0 67.1 30.0 21.1 57.0 12.6									
Change Period (Y+Rc), s									
* 5.3 5.7 5.5 5.5 5.7 5.6									
Max Green Setting (Gmax), s									
* 8.7 67.3 24.5 24.5 51.3 7.4									
Max Q Clear Time (g_c+I1), s									
6.4 33.1 26.5 15.1 53.3 6.7									
Green Ext Time (g_e), s									
0.0 2.5 0.0 0.5 0.0 0.0									
Intersection Summary									
HCM 6th Ctrl Delay									
55.0									
HCM 6th LOS									
D									
Notes									
User approved pedestrian interval to be less than phase max green.									
User approved volume balancing among the lanes for turning movement.									
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.									

Smoke Tree Resort
2025 Background PM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBT	WBL	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	NBL	NBT	SBL
Lane Configurations	→	→	←	←	→	→
Traffic Volume (vph)	267	945	25	1011	8	68
Future Volume (vph)	267	945	25	1011	8	68
Turn Type	pm-plt	NA	Perm	NA	pm+pt	NA
Protected Phases	1	6	2	2	4	3
Permitted Phases	6	6	2	2	4	8
Detector Phase	1	6	2	2	4	3
Switch Phase						
Minimum Initial (s)	3.5	15.0	15.0	7.0	7.0	3.5
Minimum Split (s)	8.0	27.0	27.0	33.5	8.0	33.5
Total Split (s)	27.0	77.0	50.0	50.0	44.0	9.0
Total Split (%)	20.8%	59.2%	38.5%	33.8%	33.8%	6.9%
Yellow Time (s)	3.0	4.5	4.5	4.0	4.0	3.0
All-Red Time (s)	1.0	1.5	1.5	2.5	2.5	1.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.5	6.5	4.0
Lead/Lag	Lead	Lag	Lag	Lag	Lag	Lead
Lead/Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	None	None	None
Act Effct Green (s)	100.6	98.6	73.6	11.7	11.7	21.4
Actuated g/C Ratio	0.77	0.76	0.57	0.09	0.09	0.16
v/c Ratio	0.66	0.41	0.10	0.60	0.12	0.40
Control Delay	18.8	6.6	12.1	22.4	55.8	62.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	18.8	6.6	12.1	22.4	55.8	62.3
LOS	B	A	B	C	E	D
Approach Delay	9.2	22.1	22.1	61.7	36.1	36.1
Approach LOS	A	C	C	E	E	D

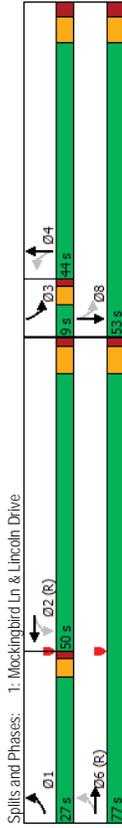

Smoke Tree Resort
2025 Background PM


1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	WBL	NBL	NBT	SBL	SBT	SBR
Movement	EBL	EBT	WBL	NBL	NBT	SBL	SBT	SBR
Lane Configurations	→	→	←	←	→	→	→	→
Traffic Volume (veh/h)	267	945	25	1011	8	68	19	52
Future Volume (veh/h)	267	945	25	1011	8	68	19	52
Initial Q (Obs.) veh	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No	No	No	No	No	No	No	No
Adj Sat Flow (veh/h)	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate	297	1050	36	28	1123	76	9	76
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh. %	2	2	2	2	2	2	2	2
Cap. veh/h	397	2562	88	375	2101	142	87	146
Arrive On Green	0.08	0.73	0.73	0.62	0.62	0.10	0.10	0.04
Sat Flow (veh/h)	1781	3505	120	519	3378	228	1134	390
Grp Volume(v) veh/h	297	532	554	28	590	609	9	97
Grp Sat Flow(s) veh/h	1781	1777	1849	519	1777	1829	1134	0
Q Serve(g/s) s	7.4	15.0	15.0	2.8	24.5	24.5	1.0	6.6
Cycle Q Clear(g_c) s	7.4	15.0	15.0	3.7	24.5	24.5	10.9	6.6
Prop In Lane	1.00	0.07	1.00	1.00	0.12	1.00	0.22	1.00
V/C Ratio(X)	0.75	0.41	0.41	0.07	0.53	0.53	0.10	0.52
Avail Cap(c_a) veh/h	573	1299	1351	375	1105	1138	87	187
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(0)	1.00	1.00	1.00	0.54	0.54	1.00	0.00	1.00
Uniform Delay (d) s/veh	13.7	6.7	6.7	10.1	13.9	13.9	62.0	55.2
Incr Delay (d2) s/veh	3.2	1.0	0.9	0.2	1.0	0.5	0.0	2.2
Initial Q Delay(g3) s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackQ(50%) veh/h	4.0	5.5	5.7	0.3	9.8	10.1	0.3	3.1
Unsig. Movement Delay, s/veh								
LnGrp Delay(d) s/veh	17.0	7.7	7.6	10.4	14.9	14.9	62.5	57.4
LnGrp LOS	B	A	A	B	B	E	A	D
Approach Vol. veh/h	1383		1227		106		320	
Approach Delay, s/veh	9.7		14.8		57.8		57.6	
Approach LOS	A		B		E		E	
Timer - Assigned Phs	1	2	3	4	6	8		
Phs Duration (G+Y+Rc) s	14.1	86.9	9.0	20.0	101.0	29.0		
Change Period (Y+Rc) s	4.0	6.0	4.0	6.5	6.0	6.5		
Max Green Selling (Gmax) s	23.0	44.0	5.0	37.5	71.0	46.5		
Max Q Clear Time (g_c+I1) s	9.4	26.5	6.7	12.9	17.0	20.9		
Green EXT Time (g_e) s	0.7	8.1	0.0	0.5	9.5	1.6		
Intersection Summary								
HCM 6th Ctrl Delay								
HCM 6th LOS								

Smoke Tree Resort
2025 Background PM

2: Quail Run Rd & Lincoln Drive
Timings

	EBL	EBT	WBT	NBT	SBL	SBT
Lane Group	EBL	EBT	WBT	NBT	SBL	SBT
Lane Configurations	5	4	4	4	4	4
Traffic Volume (vph)	85	963	1008	0	14	0
Future Volume (vph)	85	963	1008	0	14	0
Turn Type	pm-plt	NA	NA	NA	Perm	NA
Protected Phases	7	4	8	2	6	6
Permitted Phases	4				6	6
Detector Phase	7	4	8	2	6	6
Switch Phase						
Minimum Initial (s)	3.5	15.0	15.0	7.0	7.0	7.0
Minimum Split (s)	8.0	28.0	28.0	33.0	33.0	33.0
Total Split (s)	20.0	94.0	74.0	36.0	36.0	36.0
Total Split (%)	15.4%	72.3%	56.9%	27.7%	27.7%	27.7%
Yellow Time (s)	3.0	4.0	4.0	4.5	4.5	4.5
All-Red Time (s)	1.0	2.5	2.5	1.5	1.5	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.5	6.5	6.0	6.0	6.0
Lead/Lag	Lead		Lag			
Lead-Lag Optimize?	Yes		Yes			
Recall Mode	None	None	None	C-Max	C-Max	C-Max
Act Effct Green (s)	71.0	68.5	54.4	49.0	49.0	49.0
Actuated g/C Ratio	0.55	0.53	0.42	0.38	0.38	0.38
v/c Ratio	0.43	0.57	0.78	0.00	0.03	0.14
Control Delay	28.9	34.6	36.1	0.0	30.9	0.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	28.9	34.6	36.1	0.0	30.9	0.4
LOS	C	C	D	A	C	A
Approach Delay		34.2	36.1			4.5
Approach LOS		C	D			A

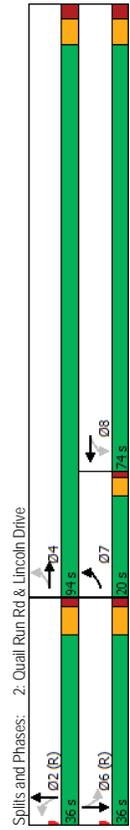

Smoke Tree Resort
2025 Background PM

2: Quail Run Rd & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (veh/h)	85	963	1	0	1008	25	0	0	2	14	0	93
Future Volume (veh/h)	85	963	1	0	1008	25	0	0	2	14	0	93
Initial Q (Obs.) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A..pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	No			No			No				No	
Work Zone On Approach	No			No			No				No	
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	94	1070	1	0	1120	28	0	0	2	16	0	103
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	180	1645	2	55	1326	33	0	0	717	695	0	717
Arrive On Green	0.09	0.90	0.90	0.00	0.37	0.37	0.00	0.00	0.45	0.45	0.00	0.45
Sat Flow, veh/h	1781	3643	3	527	3543	89	0	0	1885	1415	0	1585
Grp Volume(v), veh/h	94	522	549	0	562	586	0	0	2	16	0	103
Grp Sat Flow(s),veh/h	1781	1777	1870	527	1777	1854	0	0	1585	1415	0	1585
Q Serve(g..s), s	4.1	9.0	9.0	0.0	37.6	37.6	0.0	0.0	0.1	0.8	0.0	4.9
Cycle O Clear(g..c), s	4.1	9.0	9.0	0.0	37.6	37.6	0.0	0.0	0.1	0.9	0.0	4.9
Prop In Lane	1.00	0.00	1.00	0.00	1.00	0.05	0.00	0.00	1.00	1.00	0.00	1.00
Lane Grp Cap(c), veh/h	180	802	844	55	665	694	0	0	717	695	0	717
v/c Ratio(x)	0.52	0.65	0.65	0.00	0.84	0.84	0.00	0.00	0.00	0.02	0.00	0.14
Avail Cap(c..a), veh/h	376	1796	1258	132	923	963	0	0	717	695	0	717
HCM Platoon Ratio	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	0.92	0.92	0.92	0.00	1.00	1.00	0.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	27.8	3.9	3.9	0.0	37.2	37.2	0.0	0.0	19.5	19.8	0.0	20.8
Incr Delay (d2), s/veh	2.2	0.8	0.8	0.0	5.3	5.1	0.0	0.0	0.0	0.1	0.0	0.4
Initial Q Delay(i3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(50%),veh/h	1.7	1.8	1.9	0.0	17.2	17.9	0.0	0.0	0.0	0.3	0.0	1.9
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	30.0	4.7	4.7	0.0	42.5	42.3	0.0	0.0	19.5	19.8	0.0	21.3
LnGrp LOS	C	A	A	A	D	D	A	A	A	B	B	A
Approach Vol, veh/h	1165			1148			2				119	
Approach Delay, s/veh	6.7			42.4			19.5				21.1	
Approach LOS	A			D			B				C	
Timer - Assigned Phs	2	4	4	6	7	8						
Phs Duration (G+Y+Rc), s	64.8	65.2	64.8	10.0	55.2							
Change Period (Y+Rc), s	6.0	6.5	6.0	4.0	6.5							
Max Green Setting (Gmax), s	30.0	87.5	30.0	16.0	67.5							
Max Q Clear Time (g_c+I1), s	2.1	11.0	2.1	6.9	6.1	39.6						
Green Ext Time (g_c), s	0.0	9.4	0.0	0.6	0.1	9.0						
Intersection Summary												
HCM 6th Ctrl Delay		24.3										
HCM 6th LOS		C										

Smoke Tree Resort
2025 Background PM

3: Smoke Tree West & Lincoln Dr
HCM 6th TWSC

Intersection											
Int Delay, s/veh	0										
Movement	EBT	EBR	WBL	WBT	NBL	NBR					
Lane Configurations	↕	↕	↕	↕	↕	↕					
Traffic Vol, veh/h	979	1	0	1032	0	0					
Future Vol, veh/h	979	1	0	1032	0	0					
Conflicting Peds, #/hr	0	0	0	0	0	0					
Sign Control	Free	Free	Free	Free	Stop	Stop					
RT Channelized	-	None	-	None	-	None					
Storage Length	-	-	25	-	0	-					
Veh in Median Storage, #	0	-	-	0	0	-					
Grade, %	0	-	-	0	0	-					
Peak Hour Factor	90	90	90	90	90	90					
Heavy Vehicles, %	2	2	2	2	2	2					
Mvmt Flow	1088	1	0	1147	0	0					
Major/Minor	Major1	Major2	Minor1								
Conflicting Flow All	0	0	1089	0	1663	545					
Stage 1	-	-	-	-	1089	-					
Stage 2	-	-	-	-	574	-					
Critical Hdwy	-	-	4.14	-	6.84	6.94					
Critical Hdwy Stg 1	-	-	-	-	5.84	-					
Critical Hdwy Stg 2	-	-	-	-	5.84	-					
Follow-up Hdwy	-	-	2.22	-	3.52	3.32					
Pl Cap-1 Maneuver	-	-	636	-	88	482					
Stage 1	-	-	-	-	284	-					
Stage 2	-	-	-	-	527	-					
Platoon blocked, %	-	-	-	-	-	-					
Mov Cap-1 Maneuver	-	-	636	-	88	482					
Mov Cap-2 Maneuver	-	-	-	-	204	-					
Stage 1	-	-	-	-	284	-					
Stage 2	-	-	-	-	527	-					
Approach	EB	WB	NB								
HCM Control Delay, s	0	0	0								
HCM LOS				A							
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT						
Capacity (veh/h)	-	-	-	-	636	-					
HCM Lane V/C Ratio	-	-	-	-	-	-					
HCM Control Delay (s)	0	-	-	-	0	-					
HCM Lane LOS	A	-	-	-	A	-					
HCM 95th %ile Q(veh)	-	-	-	-	0	-					

Smoke Tree Resort
2025 Background PM

4: Smoke Tree East & Lincoln Dr
HCM 6th TWSC

Intersection											
Int Delay, s/veh	0										
Movement	EBT	EBR	WBL	WBT	NBL	NBR					
Lane Configurations	↕	↕	↕	↕	↕	↕					
Traffic Vol, veh/h	978	1	2	1032	2	2					
Future Vol, veh/h	978	1	2	1032	2	2					
Conflicting Peds, #/hr	0	0	0	0	0	0					
Sign Control	Free	Free	Free	Free	Stop	Stop					
RT Channelized	-	None	-	None	-	None					
Storage Length	-	-	25	-	0	-					
Veh in Median Storage, #	0	-	-	0	0	-					
Grade, %	0	-	-	0	0	-					
Peak Hour Factor	90	90	90	90	90	90					
Heavy Vehicles, %	2	2	2	2	2	2					
Mvmt Flow	1087	1	2	1147	2	2					
Major/Minor	Major1	Major2	Minor1								
Conflicting Flow All	0	0	1088	0	1666	544					
Stage 1	-	-	-	-	1088	-					
Stage 2	-	-	-	-	578	-					
Critical Hdwy	-	-	4.14	-	6.84	6.94					
Critical Hdwy Stg 1	-	-	-	-	5.84	-					
Critical Hdwy Stg 2	-	-	-	-	5.84	-					
Follow-up Hdwy	-	-	2.22	-	3.52	3.32					
Pl Cap-1 Maneuver	-	-	637	-	87	483					
Stage 1	-	-	-	-	284	-					
Stage 2	-	-	-	-	524	-					
Platoon blocked, %	-	-	-	-	-	-					
Mov Cap-1 Maneuver	-	-	637	-	87	483					
Mov Cap-2 Maneuver	-	-	-	-	203	-					
Stage 1	-	-	-	-	283	-					
Stage 2	-	-	-	-	524	-					
Approach	EB	WB	NB								
HCM Control Delay, s	0	0	0								
HCM LOS				C							
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT						
Capacity (veh/h)	286	-	-	-	637	-					
HCM Lane V/C Ratio	0.016	-	-	-	0.003	-					
HCM Control Delay (s)	17.8	-	-	-	10.7	-					
HCM Lane LOS	C	-	-	-	B	-					
HCM 95th %ile Q(veh)	0	-	-	-	0	-					

Smoke Tree Resort
2025 Background PM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	Init Delay, s/veh									
	0.7									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↕	↕	↕	↕	↕	↕				
Traffic Vol, veh/h	973	7	21	1004	30	26				
Future Vol, veh/h	973	7	21	1004	30	26				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	0	0	-				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	1081	8	23	1116	33	29				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	1089	0	1689	545				
Stage 1	-	-	-	-	1085	-				
Stage 2	-	-	-	-	604	-				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	636	-	84	482				
Stage 1	-	-	-	-	285	-				
Stage 2	-	-	-	-	508	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	636	-	81	482				
Mov Cap-2 Maneuver	-	-	-	-	194	-				
Stage 1	-	-	-	-	275	-				
Stage 2	-	-	-	-	508	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0.2	22.4							
HCM LOS	C									
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	268	-	-	636	-					
HCM Lane V/C Ratio	0.232	-	-	0.037	-					
HCM Control Delay (s)	22.4	-	-	10.9	-					
HCM Lane LOS	C	-	-	B	-					
HCM 95th %ile Q(veh)	0.9	-	-	0.1	-					

Smoke Tree Resort
2025 Background PM

6: Lincoln Medical East & Lincoln Dr
HCM 6th TWSC

Intersection	Init Delay, s/veh									
	0.2									
Movement	EBT	EBR	WBL	WBT	NBL	NBR				
Lane Configurations	↕	↕	↕	↕	↕	↕				
Traffic Vol, veh/h	995	4	0	1024	2	30				
Future Vol, veh/h	995	4	0	1024	2	30				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	0	0	-				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	1106	4	0	1138	2	33				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	1110	0	1677	555				
Stage 1	-	-	-	-	1108	-				
Stage 2	-	-	-	-	569	-				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	625	-	86	475				
Stage 1	-	-	-	-	278	-				
Stage 2	-	-	-	-	530	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	625	-	86	475				
Mov Cap-2 Maneuver	-	-	-	-	201	-				
Stage 1	-	-	-	-	278	-				
Stage 2	-	-	-	-	530	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0	13.9							
HCM LOS	B									
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	438	-	-	625	-					
HCM Lane V/C Ratio	0.081	-	-	-	-					
HCM Control Delay (s)	13.9	-	-	0	-					
HCM Lane LOS	B	-	-	A	-					
HCM 95th %ile Q(veh)	0.3	-	-	0	-					

Smoke Tree Resort
2025 Background PM

7: Apartment Drwy & Lincoln Dr
HCM 6th TWSC

Intersection													
Init Delay, s/veh													
24													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	8	958	46	7	920	10	74	3	53	8	0	38	7
Future Vol, veh/h	8	958	46	7	920	10	74	3	53	8	0	38	7
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	-	-	-	-	-	-	-	-	-	-	-
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	-	0	-	-	-	0
Grade, %	-	0	-	-	0	-	-	-	0	-	-	-	0
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	9	1064	51	8	1022	11	82	3	59	9	0	42	7
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	1033	0	0	1115	0	0	1635	2157	558	1596	-	517	-
Stage 1	-	-	-	-	-	-	1108	1108	-	1044	-	-	-
Stage 2	-	-	-	-	-	-	527	1049	-	552	-	-	-
Critical Hdwy	4:14	-	-	4:14	-	-	7:54	6:54	6:94	7:54	-	6:94	-
Critical Hdwy Stg 1	-	-	-	-	-	-	6:54	5:54	-	6:54	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6:54	5:54	-	6:54	-	-	-
Follow-up Hdwy	2:22	-	-	2:22	-	-	3:52	4:02	3:32	3:52	-	3:32	-
Pot Cap-1 Maneuver	668	-	-	622	-	-	-67	47	473	71	0	503	-
Stage 1	-	-	-	-	-	-	224	284	-	245	0	-	-
Stage 2	-	-	-	-	-	-	502	303	-	486	0	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	668	-	-	622	-	-	-60	46	473	58	-	503	-
Mov Cap-2 Maneuver	-	-	-	-	-	-	-60	46	-	58	-	-	-
Stage 1	-	-	-	-	-	-	221	280	-	242	-	-	-
Stage 2	-	-	-	-	-	-	454	299	-	415	-	-	-
Approach	EB	WB	NB	SB									
HCM Control Delay, s	0.1	0.1	\$ 382.4	24.1									
HCM LOS	F	F	C	C									
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	92	668	-	-	622	-	-	58	503				
HCM Lane V/C Ratio	1.57	0.013	-	-	0.013	-	-	0.153	0.084				
HCM Control Delay (s)	\$ 382.4	10.5	-	-	10.9	-	-	78	12.8				
HCM Lane LOS	F	B	-	-	B	-	-	F	B				
HCM 95th %ile Q(veh)	11.3	0	-	-	0	-	-	0.5	0.3				

Notes
- Volume exceeds capacity \$ Delay exceeds 300s + Computation Not Defined *: All major volume in platoon

Smoke Tree Resort
2025 Background PM


8: AJ's Drwy & Lincoln Dr
HCM 6th TWSC

Intersection													
Init Delay, s/veh													
3.6													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Vol, veh/h	12	951	60	69	918	9	16	1	100	5	0	8	7
Future Vol, veh/h	12	951	60	69	918	9	16	1	100	5	0	8	7
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	-	-	-	-	-	-	-	-	-	-	-
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	-	0	-	-	-	0
Grade, %	-	0	-	-	0	-	-	-	0	-	-	-	0
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	13	1057	67	77	1020	10	18	1	111	6	0	9	7
Major/Minor	Major1	Major2	Minor1	Minor2									
Conflicting Flow All	1030	0	0	1124	0	0	1781	2301	562	1734	-	515	-
Stage 1	-	-	-	-	-	-	1117	1117	-	1179	-	-	-
Stage 2	-	-	-	-	-	-	664	1184	-	555	-	-	-
Critical Hdwy	4:14	-	-	4:14	-	-	7:54	6:54	6:94	7:54	-	6:94	-
Critical Hdwy Stg 1	-	-	-	-	-	-	6:54	5:54	-	6:54	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6:54	5:54	-	6:54	-	-	-
Follow-up Hdwy	2:22	-	-	2:22	-	-	3:52	4:02	3:32	3:52	-	3:32	-
Pot Cap-1 Maneuver	670	-	-	617	-	-	52	38	470	56	0	505	-
Stage 1	-	-	-	-	-	-	221	281	-	202	0	-	-
Stage 2	-	-	-	-	-	-	416	261	-	484	0	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	670	-	-	617	-	-	46	33	470	37	-	505	-
Mov Cap-2 Maneuver	-	-	-	-	-	-	46	33	-	37	-	-	-
Stage 1	-	-	-	-	-	-	217	276	-	198	-	-	-
Stage 2	-	-	-	-	-	-	358	228	-	361	-	-	-
Approach	EB	WB	NB	SB									
HCM Control Delay, s	0.1	0.8	52.4	53.3									
HCM LOS	F	F	F	F									
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	198	670	-	-	617	-	-	37	505				
HCM Lane V/C Ratio	0.657	0.02	-	-	0.124	-	-	0.15	0.018				
HCM Control Delay (s)	52.4	10.5	-	-	11.7	-	-	118.8	12.3				
HCM Lane LOS	F	B	-	-	B	-	-	F	B				
HCM 95th %ile Q(veh)	3.9	0.1	-	-	0.4	-	-	0.5	0.1				

Smoke Tree Resort
2025 Background PM

9: Scottsdale Rd & Lincoln Dr
Timings

	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Group										
Lane Configurations	552	61	466	61	68	445	1762	66	1702	527
Traffic Volume (vph)	552	61	466	61	68	445	1762	66	1702	527
Future Volume (vph)	Split	NA	pm+ov	Split	NA	Prdt	NA	Prdt	NA	pm+ov
Turn Type	4	4	5	8	8	5	2	1	6	4
Protected Phases										
Permitted Phases	4	4	5	8	8	5	2	1	6	4
Detector Phase										
Switch Phase										
Minimum Initial (s)	7.0	7.0	7.0	7.0	7.0	10.0	10.0	5.0	10.0	7.0
Minimum Split (s)	13.0	13.0	13.0	13.0	13.0	16.7	11.0	16.0	13.0	13.0
Total Split (s)	30.0	30.0	30.0	30.0	30.0	73.0	14.0	57.0	30.0	30.0
Total Split (%)	23.1%	23.1%	23.1%	10.0%	10.0%	23.1%	56.2%	10.8%	43.8%	23.1%
Yellow Time (s)	4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0
All-Red Time (s)	1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5
Lead/Lag										
Lead/Lag Optimize?	None	C-Max	None							
Recall Mode	24.5	24.5	46.7	7.3	7.3	22.2	70.3	8.0	53.7	83.9
Act Effct Green (s)	0.19	0.19	0.36	0.06	0.06	0.17	0.54	0.06	0.41	0.65
Actuated g/C Ratio	1.07	1.07	0.85	0.69	0.62	0.84	0.74	0.67	0.90	0.55
v/c Ratio	119.1	121.1	37.3	92.9	39.0	66.0	25.4	88.3	43.0	12.6
Control Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Queue Delay	119.1	121.1	37.3	92.9	39.0	66.0	25.4	88.3	43.0	12.6
Total Delay	F	F	D	F	D	E	C	F	D	B
Approach Delay	84.3			54.9			33.4		37.3	
Approach LOS	F			D			C		D	
Intersection Summary										
Cycle Length: 130										
Actuated Cycle Length: 130										
Offset: 0 (0%), Referenced to phase 6, SBT, Start of Green										
Natural Cycle: 100										
Control Type: Actuated-Coordinated										
Maximum v/c Ratio: 1.07										
Intersection Signal Delay: 45.1										
Intersection Capacity Utilization 86.9%										
Analysis Period (min) 15										

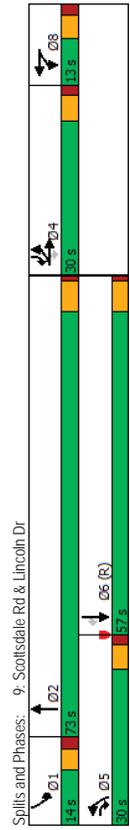

Smoke Tree Resort
2025 Background PM


9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Movement										
Lane Configurations	552	61	466	61	68	445	1762	66	1702	527
Traffic Volume (veh/h)	552	61	466	61	68	445	1762	66	1702	527
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0	0
Initial Q (Ob), veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	No	No	No	No	No	No	No	No	No	No
Work Zone On Approach										
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	662	0	518	68	76	87	494	1958	56	73
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	671	0	551	101	101	90	551	2569	73	93
Arrive On Green	0.06	0.00	0.06	0.06	0.06	0.06	0.16	0.50	0.50	0.39
Sat Flow, veh/h	3563	0	1585	1781	1777	1585	3456	5102	146	1781
Grp Volume(v), veh/h	662	0	518	68	76	87	494	1305	709	73
Grp Sat Flow(s),veh/h	1781	0	1585	1781	1777	1585	1728	1702	1844	1781
Q Serve(g_s), s	24.1	0.0	24.5	4.9	5.5	7.1	18.2	40.1	40.3	5.3
Cycle O Clear(g_c), s	24.1	0.0	24.5	4.9	5.5	7.1	18.2	40.1	40.3	5.3
Prop In Lane	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
V/C Ratio(X)	0.99	0.00	0.94	0.67	0.75	0.96	0.90	0.76	0.76	0.94
Avail Cap(c_a), veh/h	671	0	551	101	101	90	551	1714	929	2015
HCM Platoon Ratio	0.33	0.33	0.33	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(0)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	60.8	0.0	46.1	60.4	60.4	61.2	53.6	26.0	26.0	60.9
Incr Delay (d2), s/veh	31.0	0.0	24.0	13.1	24.0	82.2	12.5	1.7	3.2	17.6
Initial Q Delay(Q3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	14.5	0.0	18.9	2.6	3.1	4.9	8.9	16.3	18.1	2.8
Unsig. Movement Delay, s/veh										
LnGrp Delay(d)S/veh	91.8	0.0	70.0	73.2	84.4	143.4	66.1	27.7	29.2	78.5
LnGrp LOS	F	A	E	E	F	F	E	C	C	E
Approach Vol, veh/h	1180			231			2508			250
Approach Delay, s/veh	82.3			103.3			35.7			42.6
Approach LOS	F			F			D			D
Timer - Assigned Phs	1	2	4	5	6	8				
Phs Duration (G+Y+Rc), s	12.1	71.2	30.0	26.2	57.0	13.0				
Change Period (Y+Rc), s	* 5.3	5.7	5.5	5.5	5.7	5.6				
Max Green Setting (Gmax), s	* 8.7	67.3	24.5	24.5	51.3	7.4				
Max Q Clear Time (g_c+I1), s	7.3	42.3	26.5	20.2	48.3	9.1				
Green EXT Time (g_e), s	0.0	3.3	0.0	0.5	1.5	0.0				
Intersection Summary										
HCM 6th Ctrl Delay	49.3									
HCM 6th LOS	D									
Notes										
User approved pedestrian interval to be less than phase max green.										
User approved volume balancing among the lanes for turning movement.										
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.										

Smoke Tree Resort
2025 Total AM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations	4	4	4	4	4	4	4	4
Traffic Volume (vph)	242	1055	25	971	6	37	85	96
Future Volume (vph)	242	1055	25	971	6	37	85	96
Turn Type	pm-plt	NA	Perm	NA	pm-plt	NA	pm-plt	NA
Protected Phases	1	6	2	7	4	3	8	
Permitted Phases	6	6	2	2	7	4	3	8
Detector Phase								
Switch Phase								
Minimum Initial (s)	3.5	15.0	15.0	5.0	7.0	3.5	7.0	
Minimum Split (s)	8.0	27.0	27.0	27.0	9.5	33.5	8.0	33.5
Total Split (s)	27.0	67.0	40.0	40.0	10.0	44.0	19.0	53.0
Total Split (%)	20.8%	51.5%	30.8%	30.8%	7.7%	33.8%	14.6%	40.8%
Yellow Time (s)	3.0	4.5	4.5	4.5	3.5	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	1.5	1.0	2.5	1.0	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.0	4.5	6.5	4.0	6.5
Lead/Lag	Lead	Lag	Lag	Lag	Lead	Lag	Lead	Lag
Lead/Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	88.6	86.6	64.1	21.9	16.2	33.4	28.9	
Actuated g/C Ratio	0.68	0.67	0.49	0.49	0.17	0.12	0.26	0.22
v/c Ratio	0.72	0.52	0.13	0.65	0.05	0.29	0.27	0.85
Control Delay	28.3	13.9	19.5	23.8	30.3	33.0	36.6	50.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	28.3	13.9	19.5	23.8	30.3	33.0	36.6	50.6
LOS	C	B	B	C	C	C	D	D
Approach Delay								
Approach LOS	B	B	C	C	C	C	D	D

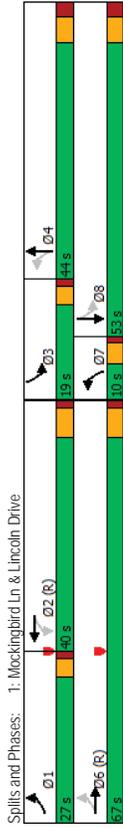

Smoke Tree Resort
2025 Total AM

1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary


	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (veh/h)	242	1055	33	25	971	48	6	37	25	85	96	253
Future Volume (veh/h)	242	1055	33	25	971	48	6	37	25	85	96	253
Initial Q (Obs.) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No											
Adj Sat Flow (veh/h)	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate	269	1172	37	28	1079	53	7	41	28	94	107	281
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh. %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	325	2114	67	241	1643	81	103	226	154	399	118	311
Arrive On Green	0.09	0.60	0.60	0.32	0.32	0.32	0.01	0.22	0.22	0.05	0.26	0.26
Sat Flow (veh/h)	1781	3516	111	462	3447	169	1781	1036	707	1781	456	1198
Grp Volume(v) veh/h	269	592	617	28	556	576	7	69	94	0	388	0
Grp Sat Flow(s) veh/h	1781	1777	1850	462	1777	1840	1781	0	1743	1781	0	1655
Q Serve(g.s) s	9.6	25.9	25.9	6.0	35.0	35.1	0.4	0.0	4.2	5.2	0.0	29.5
Cycle O Clear(g.c.) s	9.6	25.9	25.9	15.8	35.0	35.1	0.4	0.0	4.2	5.2	0.0	29.5
Prop In Lane	1.00	0.06	1.00	0.09	1.00	0.09	1.00	0.41	1.00	0.00	0.72	0.00
V/C Ratio(X)	0.83	0.55	0.55	0.12	0.66	0.66	0.07	0.00	0.18	0.24	0.00	0.90
Avail Cap(c.a.) veh/h	474	1068	1112	241	847	877	163	0	503	508	0	592
HCM Platoon Ratio	1.00	1.00	1.00	0.67	0.67	0.67	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter()	1.00	1.00	1.00	0.55	0.55	0.55	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d) s/veh	23.7	15.5	15.5	32.2	35.1	35.1	41.3	0.0	41.4	35.0	0.0	46.6
Incr Delay (d2) s/veh	7.8	2.1	2.0	0.5	2.2	2.1	0.3	0.0	0.0	0.0	0.0	0.0
Initial Q Delay(g3) s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(50%) veh/h	4.7	10.8	11.3	0.8	16.5	17.0	0.2	0.0	1.8	2.3	0.0	13.7
Unsig. Movement Delay, s/veh												
LnGrp Delay(d) s/veh	31.5	17.6	17.5	32.8	37.3	37.2	41.6	0.0	41.6	35.3	0.0	60.3
LnGrp LOS	C	B	B	C	D	D	D	A	D	D	A	E
Approach Vol. veh/h		1478		1160			76			482		
Approach Delay, s/veh		20.1		37.1			41.6			55.4		
Approach LOS		C		D			D			E		
Timer - Assigned Phs	1	2	3	4	6	7	8					
Phs Duration (G+Y+Rc) s	16.2	68.0	11.0	34.8	84.2	5.6	40.2					
Change Period (Y+Rc) s	4.0	6.0	4.0	6.5	6.0	4.5	6.5					
Max Green Setting (Gmax) s	23.0	34.0	15.0	37.5	61.0	5.5	46.5					
Max Q Clear Time (g_c+I1) s	11.6	37.1	7.2	6.2	27.9	2.4	31.5					
Green EXT Time (g_e_c) s	0.6	0.0	0.1	0.3	10.3	0.0	2.2					
Intersection Summary												
HCM 6th Ctrl Delay							32.1					
HCM 6th LOS							C					
Notes												

User approved pedestrian interval to be less than phase max green.

Smoke Tree Resort
2025 Total AM

2: Quail Run Rd & Lincoln Drive
Timings

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations	115	1117	2	937	1	0	26	0
Traffic Volume (vph)	115	1117	2	937	1	0	26	0
Future Volume (vph)	pm-plt	NA	Perm	NA	Perm	NA	Perm	NA
Turn Type	7	4	8	8	2	2	6	6
Protected Phases	4	8	8	8	2	2	6	6
Permitted Phases	4	8	8	8	2	2	6	6
Detector Phase								
Switch Phase								
Minimum Initial (s)	3.5	15.0	15.0	15.0	7.0	7.0	7.0	7.0
Minimum Split (s)	8.0	28.0	28.0	28.0	33.0	33.0	33.0	33.0
Total Split (s)	20.0	94.0	74.0	74.0	36.0	36.0	36.0	36.0
Total Split (%)	15.4%	72.3%	56.9%	56.9%	27.7%	27.7%	27.7%	27.7%
Yellow Time (s)	3.0	4.0	4.0	4.0	4.5	4.5	4.5	4.5
All-Red Time (s)	1.0	2.5	2.5	2.5	1.5	1.5	1.5	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.5	6.5	6.5	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lag	Lag	Lag				
Lead-Lag Optimize?	Yes	Yes	Yes	Yes				
Recall Mode	None	None	None	None	C-Max	C-Max	C-Max	C-Max
Act Effct Green (s)	67.7	65.2	50.4	50.4	52.3	52.3	52.3	52.3
Actuated g/C Ratio	0.52	0.50	0.39	0.39	0.40	0.40	0.40	0.40
v/c Ratio	0.55	0.70	0.02	0.77	0.01	0.05	0.09	0.09
Control Delay	33.2	42.4	29.0	44.3	0.0	28.4	0.2	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	33.2	42.4	29.0	44.3	0.0	28.4	0.2	0.2
LOS	C	D	C	D	A	C	A	A
Approach Delay	41.6		44.2				8.2	
Approach LOS	D		D				A	

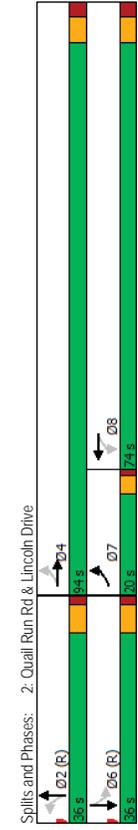

Smoke Tree Resort
2025 Total AM

2: Quail Run Rd & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	115	1117	4	2	937	12	1	0	8	26	0	66
Traffic Volume (veh/h)	115	1117	4	2	937	12	1	0	8	26	0	66
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0	0	0	0
Initial Q (Obs), veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Pod-Bike Adj(A_pbT)	No											
Work Zone On Approach	No											
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	128	1241	4	2	1041	13	1	0	9	29	0	73
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	208	1567	5	182	1217	15	83	21	668	721	0	749
Arrive On Green	0.12	0.86	0.86	0.45	0.45	0.45	0.47	0.00	0.47	0.47	0.00	0.47
Sat Flow, veh/h	1781	3633	12	447	3594	45	112	45	1413	1406	0	1585
Grp Volume(v), veh/h	128	607	638	2	515	539	10	0	29	0	73	
Grp Sat Flow(s),veh/h	1781	1777	1868	447	1777	1862	1570	0	0	1406	0	1585
Q Serve(g_s), s	6.0	19.3	19.3	0.4	33.7	33.7	0.4	0.0	0.0	0.9	0.0	3.3
Cycle O Clear(g_c), s	6.0	19.3	19.3	7.6	33.7	33.7	0.4	0.0	0.0	1.3	0.0	3.3
Prop In Lane	1.00	0.01	1.00	0.02	0.10	0.02	0.10	0.00	0.90	1.00	1.00	1.00
Lane Grp Cap(c), veh/h	208	766	806	182	602	631	773	0	0	721	0	749
v/c Ratio(x)	0.61	0.79	0.79	0.01	0.86	0.86	0.01	0.00	0.00	0.04	0.00	0.10
Avail Cap(c_a), veh/h	317	1196	1257	262	923	967	773	0	0	721	0	749
HCM Platoon Ratio	2.00	2.00	2.00	1.33	1.33	1.33	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	0.86	0.86	0.86	1.00	1.00	1.00	1.00	0.00	0.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	28.2	6.4	6.4	28.0	32.9	32.9	18.2	0.0	0.0	18.4	0.0	19.0
Incr Delay (d2), s/veh	2.5	1.7	1.6	0.0	5.0	4.8	0.0	0.0	0.0	0.1	0.0	0.3
Initial Q Delay(g3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(50%),veh/m	2.5	3.2	3.3	0.0	14.2	14.9	0.2	0.0	0.0	0.5	0.0	1.3
Unsig. Movement Delay, s/veh												
LnGrp Delay(d),s/veh	30.7	8.1	8.0	28.0	37.9	37.7	18.2	0.0	0.0	18.5	0.0	19.2
LnGrp LOS	C	A	A	C	D	D	B	A	A	B	A	B
Approach Vol, veh/h	1373			1056			10			102		
Approach Delay, s/veh	10.2			37.8			18.2			19.0		
Approach LOS	B			D			B			B		
Timer - Assigned Phs	2	4	4	6	7	8						
Phs Duration (G+Y+Rc), s	67.4	62.6	62.6	67.4	120	50.5						
Change Period (Y+Rc), s	6.0	6.5	6.5	6.0	4.0	6.5						
Max Green Selling (Gmax), s	30.0	87.5	87.5	30.0	16.0	67.5						
Max Q Clear Time (g_c+I1), s	2.4	21.3	21.3	5.3	8.0	35.7						
Green Ext Time (g_e), s	0.0	12.1	12.1	0.4	0.2	8.3						
Intersection Summary												
HCM 6th Ctrl Delay												
HCM 6th LOS												

Smoke Tree Resort
2025 Total AM

4: Smoke Tree Access B & Lincoln Dr
HCM 6th TWSC

Intersection	Int Delay, s/veh	EBT	EBR	WBL	WBT	NBL	NBR
Int Delay, s/veh	0.5						
Movement		EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations		↑↑	↑	↑↑	↑↑	↑	↑↑
Traffic Vol, veh/h	1137	17	26	934	16	22	
Future Vol, veh/h	1137	17	26	934	16	22	
Conflicting Peds, #/hr	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None	-
Storage Length	-	-	25	-	0	-	-
Veh in Median Storage, #	0	-	-	0	0	-	-
Grade, %	0	-	-	0	0	-	-
Peak Hour Factor	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2
Mvmt Flow	1263	19	29	1038	18	24	
Major/Minor	Major1	Major2	Minor1	Minor2			
Conflicting Flow All	0	0	1282	0	1850	641	
Stage 1	-	-	-	1273	-	-	-
Stage 2	-	-	-	-	577	-	-
Critical Hdwy	-	-	4.14	-	6.84	6.94	-
Critical Hdwy Stg 1	-	-	-	-	5.84	-	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-	-
Follow-up Hdwy	-	-	2.22	-	3.52	3.32	-
Pl Cap-1 Maneuver	-	-	537	-	66	417	-
Stage 1	-	-	-	-	227	-	-
Stage 2	-	-	-	-	525	-	-
Platoon blocked, %	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	537	-	62	417	-
Mov Cap-2 Maneuver	-	-	-	-	160	-	-
Stage 1	-	-	-	-	215	-	-
Stage 2	-	-	-	-	525	-	-
Approach	EB	WB	NB	NB			
HCM Control Delay, s	0	0.3	22.4	22.4			
HCM LOS			C	C			
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT		
Capacity (veh/h)	249	-	-	537	-		
HCM Lane V/C Ratio	0.17	-	-	0.064	-		
HCM Control Delay (s)	22.4	-	-	12.1	-		
HCM Lane LOS	C	-	-	B	-		
HCM 95th %ile Q(veh)	0.6	-	-	0.2	-		

Smoke Tree Resort
2025 Total AM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	Int Delay, s/veh	EBT	EBR	WBL	WBT	NBL	NBR
Int Delay, s/veh	0.4						
Movement		EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations		↑↑	↑	↑↑	↑↑	↑	↑↑
Traffic Vol, veh/h	1142	18	42	953	6	9	
Future Vol, veh/h	1142	18	42	953	6	9	
Conflicting Peds, #/hr	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop	Stop
RT Channelized	-	None	-	None	-	None	-
Storage Length	-	-	25	-	0	-	-
Veh in Median Storage, #	0	-	-	0	0	-	-
Grade, %	0	-	-	0	0	-	-
Peak Hour Factor	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2
Mvmt Flow	1269	20	47	1059	7	10	
Major/Minor	Major1	Major2	Minor1	Minor2			
Conflicting Flow All	0	0	1289	0	1903	645	
Stage 1	-	-	-	-	1279	-	-
Stage 2	-	-	-	-	624	-	-
Critical Hdwy	-	-	4.14	-	6.84	6.94	-
Critical Hdwy Stg 1	-	-	-	-	5.84	-	-
Critical Hdwy Stg 2	-	-	-	-	5.84	-	-
Follow-up Hdwy	-	-	2.22	-	3.52	3.32	-
Pl Cap-1 Maneuver	-	-	534	-	61	415	-
Stage 1	-	-	-	-	225	-	-
Stage 2	-	-	-	-	496	-	-
Platoon blocked, %	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	534	-	56	415	-
Mov Cap-2 Maneuver	-	-	-	-	190	-	-
Stage 1	-	-	-	-	205	-	-
Stage 2	-	-	-	-	496	-	-
Approach	EB	WB	NB	NB			
HCM Control Delay, s	0	0.5	20.9	20.9			
HCM LOS			C	C			
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT		
Capacity (veh/h)	243	-	-	534	-		
HCM Lane V/C Ratio	0.069	-	-	0.087	-		
HCM Control Delay (s)	20.9	-	-	12.4	-		
HCM Lane LOS	C	-	-	B	-		
HCM 95th %ile Q(veh)	0.2	-	-	0.3	-		

Smoke Tree Resort
2025 Total AM

6: Lincoln Medical East & Lincoln Dr
HCM 6th TWSC

Intersection	Int Delay, s/veh	0.1											
Movement	EBL	EBR	WBL	WBT	NBL	NBR							SBR
Lane Configurations	↕	↕	↕	↕	↕	↕							↕
Traffic Vol, veh/h	1138	11	6	995	0	9							7
Future Vol, veh/h	1138	11	6	995	0	9							7
Conflicting Peds, #/hr	0	0	0	0	0	0							0
Sign Control	Free	Free	Free	Free	Free	Stop							Stop
RT Channelized	-	None	-	None	-	None							-
Storage Length	-	-	-	-	-	-							-
Veh in Median Storage, #	0	-	-	0	0	0							0
Grade, %	0	-	-	0	0	0							0
Peak Hour Factor	90	90	90	90	90	90							90
Heavy Vehicles, %	2	2	2	2	2	2							2
Mvmt Flow	1264	12	7	1106	0	10							16
Major/Minor	Major1	Major2	Minor1										
Conflicting Flow All	0	0	1276	0	-	638							-
Stage 1	-	-	-	-	-	-							-
Stage 2	-	-	-	-	-	-							-
Critical Hdwy	-	-	4.14	-	-	6.94							-
Critical Hdwy Stg 1	-	-	-	-	-	-							-
Critical Hdwy Stg 2	-	-	-	-	-	-							-
Follow-up Hdwy	-	-	2.22	-	-	3.32							-
Pot Cap-1 Maneuver	-	-	540	-	-	419							-
Stage 1	-	-	-	-	-	0							-
Stage 2	-	-	-	-	-	0							-
Platoon blocked, %	-	-	-	-	-	0							-
Mov Cap-1 Maneuver	-	-	540	-	-	419							-
Mov Cap-2 Maneuver	-	-	-	-	-	-							-
Stage 1	-	-	-	-	-	-							-
Stage 2	-	-	-	-	-	-							-
Approach	EB	WB	NB									SB	
HCM Control Delay, s	0	0.1	13.8									13.8	
HCM LOS			B									B	
Minor Lane/Major Mvmt	NBLn1	EBL	EBR	WBL	WBT							NBLn2	
Capacity (veh/h)	419	-	-	540	-							419	
HCM Lane V/C Ratio	0.024	-	-	0.012	-							0.031	
HCM Control Delay (s)	13.8	-	-	11.8	-							12.4	
HCM Lane LOS	B	-	-	B	-							B	
HCM 95th %ile Q(veh)	0.1	-	-	0	-							0.1	

Smoke Tree Resort
2025 Total AM

7: Apartment Drwy & Lincoln Dr
HCM 6th TWSC

Intersection	Int Delay, s/veh	17.8											
Movement	EBL	EBT	EBR	WBL	WBT	NBL	NBT	NBR	SBL	SBT	SBR		
Lane Configurations	↕	↕	↕	↕	↕	↕	↕	↕	↕	↕	↕		
Traffic Vol, veh/h	29	1082	38	20	930	11	56	0	33	6	0	14	
Future Vol, veh/h	29	1082	38	20	930	11	56	0	33	6	0	14	
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0	
Sign Control	Free	Free	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	None	
RT Channelized	-	None	-	None	-	None	-	None	-	None	-	None	
Storage Length	25	-	-	25	-	-	-	-	0	-	0	0	
Veh in Median Storage, #	0	-	-	0	-	-	-	-	0	-	0	0	
Grade, %	0	-	-	0	-	-	-	-	0	-	0	0	
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90	
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2	
Mvmt Flow	32	1202	42	22	1033	12	62	0	37	7	0	16	
Major/Minor	Major1	Major2	Minor1										
Conflicting Flow All	1045	0	0	1244	0	0	1848	2376	622	1748	-	523	
Stage 1	-	-	-	-	-	-	1287	1287	-	1083	-	-	
Stage 2	-	-	-	-	-	-	561	1089	-	665	-	-	
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	-	6.94	
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-	
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	-	3.32	
Pot Cap-1 Maneuver	661	-	-	555	-	-	-46	34	430	55	0	499	
Stage 1	-	-	-	-	-	-	174	233	-	232	0	-	
Stage 2	-	-	-	-	-	-	480	290	-	416	0	-	
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-	
Mov Cap-1 Maneuver	661	-	-	555	-	-	-42	31	430	47	-	499	
Mov Cap-2 Maneuver	-	-	-	-	-	-	-42	31	-	47	-	-	
Stage 1	-	-	-	-	-	-	766	222	-	221	-	-	
Stage 2	-	-	-	-	-	-	447	278	-	362	-	-	
Approach	EB	WB	NB									SB	
HCM Control Delay, s	0.3	0.2	\$ 428.6									36.9	
HCM LOS			F									E	
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2				
Capacity (veh/h)	63	661	-	-	555	-	-	-	47	499			
HCM Lane V/C Ratio	1.57	0.049	-	-	0.04	-	-	-	0.142	0.031			
HCM Control Delay (s)	\$ 428.6	10.7	-	-	11.8	-	-	-	93.9	12.4			
HCM Lane LOS	F	B	-	-	B	-	-	-	F	B			
HCM 95th %ile Q(veh)	8.7	0.2	-	-	0.1	-	-	-	0.5	0.1			

Smoke Tree Resort
2025 Total AM


8: AJ's Drwy & Lincoln Dr
HCM 6th TWSC

Intersection	1.4											
Int'l Delay, s/veh												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	3	1060	60	48	943	9	7	0	46	5	1	14
Traffic Vol. veh/h	3	1060	60	48	943	9	7	0	46	5	1	14
Future Vol. veh/h	0	0	0	0	0	0	0	0	0	0	0	0
Conflicting Peds. #/hr	Free											
Sign Control	-	-	None									
RT Channelized	25	-	None	-	25	-	-	-	None	-	-	None
Storage Length	-	0	-	-	0	-	-	-	0	-	-	0
Veh in Median Storage, #	-	0	-	-	0	-	-	-	0	-	-	0
Grade, %	90	90	90	90	90	90	90	90	90	90	90	90
Peak Hour Factor	2	2	2	2	2	2	2	2	2	2	2	2
Heavy Vehicles, %	3	1178	67	53	1048	10	8	0	51	6	1	16
Mgmt Flow												
Major/Minor	Major1	Major2	Minor1	Minor2								
Conflicting Flow All	1058	0	0	1245	0	0	1849	2382	623	1754	2410	529
Stage 1	-	-	-	-	-	-	-	1218	1218	-	1159	1159
Stage 2	-	-	-	-	-	-	-	631	1164	-	595	1251
Critical Hwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	6.54	6.94
Critical Hwy Slg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-
Critical Hwy Slg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	5.54	-
Follow-up Hwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	4.02	3.32
Pot Cap-1 Maneuver	654	-	-	555	-	-	46	34	429	54	32	494
Stage 1	-	-	-	-	-	-	191	251	-	208	268	-
Stage 2	-	-	-	-	-	-	436	267	-	458	242	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	654	-	-	555	-	-	40	31	429	44	29	494
Mov Cap-2 Maneuver	-	-	-	-	-	-	40	31	-	44	29	-
Stage 1	-	-	-	-	-	-	190	250	-	207	243	-
Stage 2	-	-	-	-	-	-	380	242	-	402	241	-
Approach	EB	WB	NB	WB	NB	SB	WB	NB	SB	WB	NB	SB
HCM Control Delay, s	0	0.6	0.6	32.6	32.6	35.1	32.6	32.6	35.1	32.6	32.6	35.1
HCM LOS	D	D	D	D	D	E	D	D	E	D	D	E
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2	SBLn1	SBLn2	SBR
Capacity (veh/h)	188	654	-	-	555	-	-	44	494	-	-	-
HCM Lane V/C Ratio	0.313	0.005	-	-	0.096	-	-	0.126	0.031	-	-	-
HCM Control Delay (s)	32.6	10.5	-	-	12.2	-	-	98.3	12.5	-	-	-
HCM Lane LOS	D	B	-	-	B	-	-	F	B	-	-	-
HCM 95th %ile Q(veh)	1.3	0	-	-	0.3	-	-	0.4	0.1	-	-	-

Smoke Tree Resort
2025 Total AM

9: Scottsdale Rd & Lincoln Dr
Timings

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	500	42	508	41	39	331	1429	55	1814	666	666	666
Traffic Volume (vph)	500	42	508	41	39	331	1429	55	1814	666	666	666
Future Volume (vph)	Split	NA	pm+ov	Split	NA	Prot	NA	Prot	NA	pm+ov	NA	pm+ov
Turn Type	4	4	5	8	8	5	2	1	6	4	6	4
Protected Phases	4	4	5	8	8	5	2	1	6	4	6	4
Detector Phase	4	4	5	8	8	5	2	1	6	4	6	4
Switch Phase	7.0	7.0	7.0	7.0	7.0	7.0	10.0	5.0	10.0	7.0	7.0	7.0
Minimum Initial (s)	13.0	13.0	13.0	13.0	13.0	13.0	16.7	11.0	16.0	13.0	13.0	13.0
Minimum Split (s)	32.0	32.0	27.0	21.0	21.0	27.0	54.0	23.0	50.0	32.0	32.0	32.0
Total Split (%)	24.6%	24.6%	20.8%	16.2%	16.2%	20.8%	41.5%	17.7%	38.5%	24.6%	24.6%	24.6%
Yellow Time (s)	4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0	4.0	4.0
All-Red Time (s)	1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5	1.5	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5	5.5	5.5
Lead/Lag	Lead											
Lead-Lag Optimize?	None											
Recall Mode	None	None	None	None	None	None	None	None	None	None	None	None
Act Effct Green (s)	25.7	25.7	44.6	8.4	8.4	18.9	67.0	8.9	54.7	86.1	86.1	86.1
Actuated g/C Ratio	0.20	0.20	0.34	0.06	0.06	0.15	0.52	0.07	0.42	0.66	0.66	0.66
v/C Ratio	0.91	0.91	0.86	0.40	0.38	0.74	0.63	0.51	0.94	0.64	0.64	0.64
Control Delay	99.8	99.8	38.6	68.3	68.3	31.3	61.9	25.2	72.1	46.8	46.8	46.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	99.8	99.8	38.6	68.3	68.3	31.3	61.9	25.2	72.1	46.8	46.8	46.8
LOS	F	F	D	E	E	C	E	C	E	D	D	A
Approach Delay	70.2											
Approach LOS	E											
Intersection Summary	Intersection LOS: D											
Cycle Length: 130	320											
Actuated Cycle Length: 130	42.9											
Offset: 0 (0%), Referenced to phase 6.SBT, Start of Green	C											
Natural Cycle: 90	C											
Control Type: Actuated-Coordinated	D											
Maximum v/C Ratio: 0.94	D											
Intersection Signal Delay: 42.1	Intersection LOS: D											
Intersection Capacity Utilization 86.3%	ICU Level of Service E											
Analysis Period (min) 15	15											

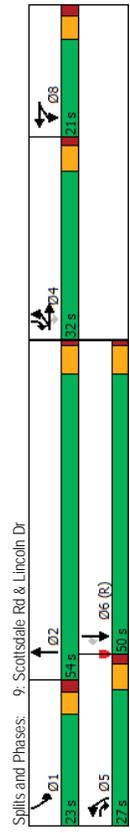

Smoke Tree Resort
2025 Total AM

9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (veh/h)	500	42	508	41	39	52	331	1429	43	55	1814	666
Future Volume (veh/h)	500	42	508	41	39	52	331	1429	43	55	1814	666
Initial Q (Q _{bb}) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pb1)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No	No	No	No	No	No	No	No	No	No	No	No
Adj Sat Flow, veh/hln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	590	0	564	46	43	58	368	1588	48	61	2016	740
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	726	0	518	95	95	85	425	2145	65	79	1740	863
Arrive On Green	0.07	0.00	0.07	0.05	0.05	0.05	0.12	0.42	0.42	0.04	0.34	0.34
Sat Flow, veh/h	3563	0	1585	1781	1777	1585	3456	5093	154	1781	5106	1585
Grp Volume(v), veh/h	590	0	564	46	43	58	368	1061	575	61	2016	740
Grp Sat Flow(s),veh/hln	1781	0	1585	1781	1777	1585	1728	1702	1843	1781	1702	1585
Q Serve(g.s), s	21.2	0.0	26.5	3.3	3.1	4.7	13.6	34.1	34.1	4.4	44.3	44.3
Cycle Q Clear(g.q), s	21.2	0.0	26.5	3.3	3.1	4.7	13.6	34.1	34.1	4.4	44.3	44.3
Prop In Lane	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lane Grp Cap(c), veh/h	726	0	518	95	95	85	425	1434	776	79	1740	863
V/C Ratio(x)	0.81	0.00	1.09	0.48	0.45	0.68	0.87	0.74	0.74	0.78	1.16	0.86
Avail Cap(c), veh/h	726	0	518	211	210	188	572	1434	776	243	1740	863
HCM Platoon Ratio	0.33	0.33	0.33	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	58.2	0.0	49.9	59.8	59.7	60.4	55.9	31.6	31.6	61.5	42.9	23.6
Incr Delay (d2), s/veh	6.5	0.0	65.7	1.4	1.2	3.6	8.3	1.8	3.4	6.0	78.3	10.7
Initial Q Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(50%)veh/h	10.9	0.0	25.4	1.5	1.4	2.0	6.4	14.3	15.8	2.1	31.0	27.2
Unsig. Movement Delay, s/veh	64.7	0.0	115.6	61.2	60.9	64.0	64.2	33.5	35.0	67.5	121.1	34.3
LnGrp Delay(d),s/veh	E	A	F	E	E	E	E	C	C	C	E	F
LnGrp LOS	E	A	F	E	E	E	E	C	C	C	E	F
Approach Vol. veh/h	1154		147				2004				2817	
Approach Delay, s/veh	89.6		62.2				39.5				97.2	
Approach LOS	F		E				D				F	
Timer - Assigned Phs	1	2	2	4	5	6	8					
Phs Duration (G+Y+R), s	11.0	60.5	32.0	21.5	50.0	12.6						
Change Period (Y+RC), s	* 5.3	5.7	5.5	5.5	5.7	5.6						
Max Green Stalling (Gmax), s	* 18	48.3	26.5	21.5	44.3	15.4						
Max Q Clear Time (g_c+1t), s	6.4	36.1	28.5	15.6	46.3	6.7						
Green Ext Time (p_c), s	0.0	2.3	0.0	0.4	0.0	0.2						

Intersection Summary
HCM 6th Ctrl Delay 76.0
HCM 6th LOS E

Notes
User approved pedestrian interval to be less than phase max green.
User approved volume balancing among the lanes for turning movement.
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.

Smoke Tree Resort
2025 Total AM

10: Quail Run Rd & Access A
HCM 6th TWSC

Intersection	0											
In Delay, s/veh	0											
Movement	WBL	WBR	NBT	NBR	SBL	SBT						
Lane Configurations	W	W	T	T	T	T						
Traffic Vol, veh/h	0	1	0	0	1	0						
Future Vol, veh/h	0	1	0	0	1	0						
Conflicting Peds, #/hr	0	0	0	0	0	0						
Sign Control	Stop	Stop	Free	Free	Free	Free						
RT Channelized	-	None	-	None	-	None						
Storage Length	0	-	-	-	-	-						
Veh in Median Storage, #	0	-	0	-	-	-						
Grade, %	0	-	0	-	-	-						
Peak Hour Factor	90	90	90	90	90	90						
Heavy Vehicles, %	2	2	2	2	2	2						
Mvmt Flow	0	1	0	0	1	0						
Major/Minor	Minor1	Major1	Major1	Major2								
Conflicting Flow All	2	0	0	0	0	0						
Stage 1	0	-	-	-	-	-						
Stage 2	2	-	-	-	-	-						
Critical Hdwy	6.42	6.22	-	-	4.12	-						
Critical Hdwy Stg 1	5.42	-	-	-	-	-						
Critical Hdwy Stg 2	5.42	-	-	-	-	-						
Follow-up Hdwy	3.518	3.318	-	-	2.218	-						
Pd Cap-1 Maneuver	1021	-	-	-	-	-						
Stage 1	-	-	-	-	-	-						
Stage 2	1021	-	-	-	-	-						
Platoon blocked, %	-	-	-	-	-	-						
Mov Cap-1 Maneuver	1021	-	-	-	-	-						
Mov Cap-2 Maneuver	1021	-	-	-	-	-						
Stage 1	-	-	-	-	-	-						
Stage 2	1021	-	-	-	-	-						
Approach	WB	NB	SB									
HCM Control Delay, s	0											
HCM LOS	-											
Minor Lane/Major Mvmt	NBT	NBR/WB Ln1	SBL	SBT								
Capacity (veh/h)	-	-	-	-								
HCM Lane V/C Ratio	-	-	-	-								
HCM Control Delay (s)	-	-	-	-								
HCM Lane LOS	-	-	-	-								
HCM 95th %tile Q(veh)	-	-	-	-								


Intersection Summary
HCM Control Delay, s 0
HCM LOS -

Minor Lane/Major Mvmt
NBT NBR/WB Ln1 SBL SBT
Capacity (veh/h) - - - -
HCM Lane V/C Ratio - - - -
HCM Control Delay (s) - - - -
HCM Lane LOS - - - -
HCM 95th %tile Q(veh) - - - -

Smoke Tree Resort
2025 Total AM Mitigated

9: Scottsdale Rd & Lincoln Dr
Timings

	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Group										
Lane Configurations	500	42	508	41	39	331	1429	55	1814	666
Traffic Volume (vph)	500	42	508	41	39	331	1429	55	1814	666
Future Volume (vph)	Split	NA	pm+ov	Split	NA	Prdt	NA	Prdt	NA	pm+ov
Turn Type	4	4	5	8	8	5	2	1	6	4
Protected Phases	4	4	5	8	8	5	2	1	6	4
Permitted Phases	4	4	5	8	8	5	2	1	6	4
Detector Phase										
Switch Phase										
Minimum Initial (s)	7.0	7.0	7.0	7.0	7.0	10.0	10.0	5.0	10.0	7.0
Minimum Split (s)	13.0	13.0	13.0	13.0	13.0	16.7	11.0	16.0	13.0	13.0
Total Split (s)	30.0	30.0	21.0	19.0	19.0	21.0	58.0	13.0	50.0	30.0
Total Split (%)	25.0%	25.0%	17.5%	15.8%	15.8%	17.5%	48.3%	10.8%	41.7%	25.0%
Yellow Time (s)	4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0
All-Red Time (s)	1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5
Lead/Lag										
Lead/Lag Optimize?	None	C-Max	None							
Recall Mode	23.8	23.8	40.7	8.2	8.2	16.9	59.7	8.2	48.8	78.3
Act Effct Green (s)	0.20	0.20	0.34	0.07	0.07	0.14	0.50	0.07	0.41	0.65
Actuated g/C Ratio	0.90	0.90	0.89	0.38	0.37	0.76	0.65	0.50	0.98	0.63
v/c Ratio	77.0	77.0	35.4	62.1	28.9	60.3	25.1	67.8	50.5	8.4
Control Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	E	E	D	E	C	E	C	E	D	A
LOS	E	E	D	E	C	E	C	E	D	A
Approach Delay	56.9			39.3			31.5		39.8	
Approach LOS	E			D			C		D	
Intersection Summary										
Cycle Length: 120										
Actuated Cycle Length: 120										
Offset: 0 (0%), Referenced to phase 6, SBT, Start of Green										
Natural Cycle: 90										
Control Type: Actuated-Coordinated										
Maximum v/c Ratio: 0.98										
Intersection Signal Delay: 40.3										
Intersection Capacity Utilization 86.3%										
Analysis Period (min) 15										

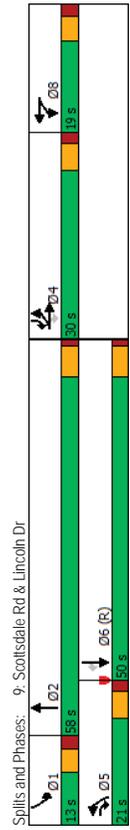

Smoke Tree Resort
2025 Total AM Mitigated


9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Movement										
Lane Configurations	500	42	508	41	39	331	1429	43	55	1814
Traffic Volume (veh/h)	500	42	508	41	39	331	1429	43	55	1814
Future Volume (veh/h)	500	42	508	41	39	331	1429	43	55	1814
Initial Q (Ob), veh	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No	No	No	No	No	No	No	No	No	No
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	590	0	564	46	43	58	368	1588	48	61
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	727	0	517	103	103	92	422	2286	69	78
Arrive On Green	0.20	0.00	0.20	0.06	0.06	0.06	0.12	0.45	0.04	0.37
Sat Flow, veh/h	3563	0	1585	1781	1777	1585	3456	5093	154	1781
Grp Volume(v), veh/h	590	0	564	46	43	58	368	1061	575	61
Grp Sat Flow(s),veh/h	1781	0	1585	1781	1777	1585	1728	1702	1843	1781
Q Serve(g.s), s	19.0	0.0	24.5	3.0	2.8	4.3	12.6	30.0	4.1	44.3
Cycle Q Clear(g.c), s	19.0	0.0	24.5	3.0	2.8	4.3	12.6	30.0	4.1	44.3
Prop In Lane	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lane Grp Cap(c), veh/h	727	0	517	103	103	92	422	1528	827	78
V/C Ratio(X)	0.81	0.00	1.09	0.45	0.42	0.63	0.87	0.69	0.69	0.78
Avail Cap(c), veh/h	727	0	517	199	198	177	446	1528	827	114
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter()	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), veh/h	45.5	0.0	40.4	54.7	54.6	55.3	51.8	26.5	26.5	56.8
Incr Delay (d2), veh/h	6.4	0.0	66.5	1.1	1.0	2.7	15.5	1.2	2.1	10.4
%ile BackOf(60%) veh/h	9.0	0.0	24.6	1.4	1.3	1.8	6.3	12.2	13.4	2.1
Unsig. Movement Delay, s/veh	52.0	0.0	106.9	55.8	55.6	57.9	67.3	27.6	28.6	67.2
LnGrp Delay(d),s/veh	D	A	F	E	E	E	E	C	C	E
LnGrp LOS	D	A	F	E	E	E	E	C	C	E
Approach Vol, veh/h	1154			147			2004			2817
Approach Delay, s/veh	78.8			56.6			35.2			66.2
Approach LOS	E			E			D			E
Timer - Assigned Phs	1	2	4	5	6	8				
Phs Duration (G+Y+Rc), s	10.6	59.6	30.0	20.1	50.0	12.5				
Change Period (Y+Rc), s	* 5.3	5.7	5.5	5.5	5.7	5.6				
Max Green Setting (Gmax), s	* 7.7	52.3	24.5	15.5	44.3	13.4				
Max Q Clear Time (g_c+I1), s	6.1	32.0	26.5	14.6	46.3	6.3				
Green EXT Time (g_e), s	0.0	2.4	0.0	0.1	0.0	0.2				
Intersection Summary										
HCM 6th Ctrl Delay	58.2									
HCM 6th LOS	E									
Notes										
User approved pedestrian interval to be less than phase max green.										
User approved volume balancing among the lanes for turning movement.										
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.										

Smoke Tree Resort
2025 Total PM

1: Mockingbird Ln & Lincoln Drive
Timings

	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations	5	4	4	4	4	4	4	4
Traffic Volume (vph)	267	958	27	1023	8	68	70	52
Future Volume (vph)	267	958	27	1023	8	68	70	52
Turn Type	pm-plt	NA	Perm	NA	pm-plt	NA	pm+pt	NA
Protected Phases	1	6	2	7	4	3	8	
Permitted Phases	6	6	2	2	2	4	8	
Detector Phase	1	6	2	2	2	4	3	8
Switch Phase								
Minimum Initial (s)	3.5	15.0	15.0	5.0	7.0	3.5	7.0	
Minimum Split (s)	8.0	27.0	27.0	27.0	9.5	33.5	8.0	33.5
Total Split (s)	27.0	67.0	40.0	40.0	10.0	44.0	19.0	53.0
Total Split (%)	20.8%	51.5%	30.8%	30.8%	7.7%	33.8%	14.6%	40.8%
Yellow Time (s)	3.0	4.5	4.5	4.5	3.5	4.0	3.0	4.0
All-Red Time (s)	1.0	1.5	1.5	1.5	1.0	2.5	1.0	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.0	6.0	6.0	6.0	4.5	6.5	4.0	6.5
Lead/Lag	Lead	Lag	Lag	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Max	C-Max	C-Max	None	None	None	None
Act Effct Green (s)	95.6	93.6	69.2	69.2	18.2	11.8	26.4	21.9
Actuated g/C Ratio	0.74	0.72	0.53	0.53	0.14	0.09	0.20	0.17
v/c Ratio	0.73	0.43	0.12	0.65	0.06	0.57	0.30	0.63
Control Delay	29.7	9.2	10.7	19.9	37.6	61.9	42.9	27.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	29.7	9.2	10.7	19.9	37.6	61.9	42.9	27.4
LOS	C	A	B	B	D	E	D	C
Approach Delay		13.5		19.6		59.9		31.1
Approach LOS		B		B		E		C

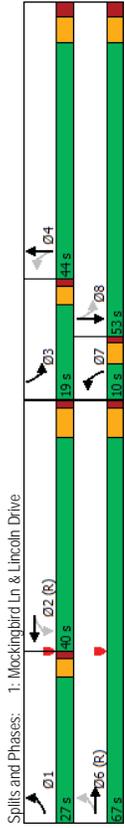

Smoke Tree Resort
2025 Total PM

1: Mockingbird Ln & Lincoln Drive
HCM 6th Signalized Intersection Summary


	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (veh/h)	267	958	32	27	1023	71	8	68	21	70	52	169
Future Volume (veh/h)	267	958	32	27	1023	71	8	68	21	70	52	169
Initial Q (Obs.) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	No											
Work Zone On Approach	No											
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	297	1064	36	30	1137	79	9	76	23	78	58	188
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	347	2404	81	337	1914	133	106	190	58	257	67	217
Arrive On Green	0.09	0.69	0.69	0.38	0.38	0.38	0.01	0.14	0.14	0.05	0.17	0.17
Sat Flow, veh/h	1781	3507	119	513	3371	234	1781	1378	417	1781	388	1257
Grp Volume(v), veh/h	297	539	561	30	599	617	9	0	99	78	0	246
Grp Sat Flow(s),veh/h	1781	1777	1849	513	1777	1828	1781	0	1795	1781	0	1644
Q Serve(g/s), s	8.6	17.8	17.8	5.0	35.1	35.1	0.6	0.0	6.5	4.7	0.0	18.9
Cycle Q Clear(g_c), s	8.6	17.8	17.8	7.5	35.1	35.1	0.6	0.0	6.5	4.7	0.0	18.9
Prop In Lane	1.00	0.06	1.00	1.00	0.13	1.00	0.23	1.00	0.23	1.00	0.76	0.76
Lane Grp Cap(c), veh/h	347	1218	1268	337	1009	1038	106	0	248	257	0	284
v/c Ratio(X)	0.86	0.44	0.44	0.09	0.59	0.59	0.09	0.00	0.40	0.30	0.00	0.86
Avail Cap(c), veh/h	507	1218	1268	337	1009	1038	162	0	518	375	0	588
HCM Platoon Ratio	1.00	1.00	1.00	0.67	0.67	0.67	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	1.00	1.00	1.00	0.53	0.53	0.53	1.00	0.00	1.00	1.00	0.00	1.00
Uniform Delay (d), s/veh	21.7	9.2	9.2	20.6	28.3	28.3	48.1	0.0	51.1	43.5	0.0	52.3
Incr Delay (d2), s/veh	9.5	1.2	1.1	0.3	1.4	1.3	0.3	0.0	1.0	0.7	0.0	7.7
Initial Q Delay(g3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(50%),veh/m	6.3	6.9	7.2	0.7	16.2	16.7	0.3	0.0	3.0	2.2	0.0	8.4
Unsig. Movement Delay, s/veh												
LnGrp Delay(d) s/veh	31.2	10.4	10.4	20.8	29.6	29.6	48.5	0.0	52.1	44.1	0.0	60.0
LnGrp LOS	C	B	B	C	C	C	D	A	D	D	A	E
Approach Vol, veh/h	1397			1246			108				324	
Approach Delay, s/veh	14.8			29.4			51.8				56.2	
Approach LOS	B			C			D				E	
Timer - Assigned Phs	1	2	3	4	6	7	8					
Phs Duration (G+Y+Rc), s	15.3	79.8	10.4	24.5	95.1	5.9	29.0					
Change Period (Y+Rc), s	4.0	6.0	4.0	6.5	6.0	4.5	6.5					
Max Green Selling (Gmax), s	23.0	34.0	15.0	37.5	61.0	5.5	46.5					
Max Q Clear Time (g_c+I1), s	10.6	37.1	6.7	8.5	19.8	2.6	20.9					
Green Ext Time (g_e), s	0.7	0.0	0.1	0.5	9.4	0.0	1.6					
Intersection Summary												
HCM 6th Ctrl Delay												
HCM 6th LOS												
Notes												

User approved pedestrian interval to be less than phase max green.

Smoke Tree Resort
2025 Total PM

2: Quail Run Rd & Lincoln Drive
Timings

	EBL	EBT	WBT	NBL	NBT	SBL	SBT
Lane Group	EBL	EBT	WBT	NBL	NBT	SBL	SBT
Lane Configurations	85	981	1024	1	0	14	0
Traffic Volume (vph)	85	981	1024	1	0	14	0
Future Volume (vph)	pm-plt	NA	NA	Perm	NA	Perm	NA
Turn Type	7	4	8	2	2	6	6
Protected Phases	4	4	8	2	2	6	6
Permitted Phases	3.5	15.0	15.0	7.0	7.0	7.0	7.0
Detector Phase	8.0	28.0	28.0	33.0	33.0	33.0	33.0
Switch Phase	20.0	94.0	74.0	36.0	36.0	36.0	36.0
Minimum Initial (s)	15.4%	72.3%	56.9%	27.7%	27.7%	27.7%	27.7%
Minimum Split (s)	3.0	4.0	4.0	4.5	4.5	4.5	4.5
Total Split (%)	All-Red Time (s)	1.0	2.5	2.5	1.5	1.5	1.5
Yellow Time (s)	Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0
All-Red Time (s)	Total Lost Time (s)	4.0	6.5	6.5	6.0	6.0	6.0
Lost Time Adjust (s)	Lead/Lag	Lead	Lag	Yes	Yes	Yes	Yes
Total Lost Time (s)	Lead-Lag Optimize?	None	None	C-Max	C-Max	C-Max	C-Max
Lead/Lag	Recall Mode	None	None	48.4	48.4	48.4	48.4
Lead-Lag Optimize?	Act Effct Green (s)	71.6	69.1	55.1	48.4	48.4	48.4
Recall Mode	Actuated g/C Ratio	0.55	0.53	0.42	0.37	0.37	0.37
Act Effct Green (s)	v/c Ratio	0.43	0.58	0.78	0.00	0.03	0.14
Actuated g/C Ratio	Control Delay	29.8	34.5	44.3	0.0	31.2	0.4
v/c Ratio	Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay	Total Delay	29.8	34.5	44.3	0.0	31.2	0.4
Queue Delay	LOS	C	C	D	A	C	A
Total Delay	Approach Delay	34.2	44.3	44.3	4.5	4.5	4.5
LOS	Approach LOS	C	D	D	A	A	A
Approach Delay	Intersection Summary						
Approach LOS	Cycle Length: 130						
Intersection Summary	Actuated Cycle Length: 130						
Cycle Length: 130	Offset: 0 (0%), Referenced to phase 2:NBLT and 6:SBTL, Start of Green						
Actuated Cycle Length: 130	Natural Cycle: 70						
Offset: 0 (0%), Referenced to phase 2:NBLT and 6:SBTL, Start of Green	Control Type: Actuated-Coordinated						
Natural Cycle: 70	Maximum v/c Ratio: 0.78						
Control Type: Actuated-Coordinated	Intersection Signal Delay: 37.5						
Maximum v/c Ratio: 0.78	Intersection Capacity Utilization 61.3%						
Intersection Signal Delay: 37.5	Analysis Period (min) 15						
Intersection Capacity Utilization 61.3%							
Analysis Period (min) 15							

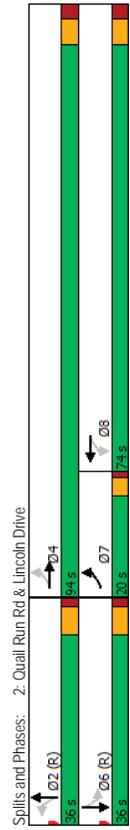

Smoke Tree Resort
2025 Total PM

2: Quail Run Rd & Lincoln Drive
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	85	981	2	0	1024	25	1	0	2	14	0	93
Traffic Volume (veh/h)	85	981	2	0	1024	25	1	0	2	14	0	93
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0	0	0	0
Initial Q (Obs.) veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pbT)	No	No	No	No	No	No	No	No	No	No	No	No
Parking Bus, Adj	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Work Zone On Approach	94	1090	2	0	1138	28	1	0	2	16	0	103
Adj Sat Flow, veh/h	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Adj Flow Rate, veh/h	183	1569	3	55	1251	31	251	17	462	727	0	749
Peak Hour Factor	0.09	0.86	0.86	0.00	0.71	0.71	0.47	0.00	0.47	0.47	0.00	0.47
Percent Heavy Veh, %	1781	3639	7	516	3544	87	453	36	979	1415	0	1585
Cap. veh/h	94	532	560	0	570	596	3	0	16	16	0	103
Arrive On Green	1781	1777	1869	516	1777	1855	1468	0	0	1415	0	1585
Sat Flow, veh/h	4.3	13.4	13.4	0.0	34.3	34.3	4.8	0.0	0.0	0.0	0.0	4.8
Grp Volume(v), veh/h	4.3	13.4	13.4	0.0	34.3	34.3	4.8	0.0	0.0	0.0	0.0	4.8
Grp Sat Flow(s),veh/h	1.00	0.00	1.00	0.00	1.00	0.05	0.33	0.67	1.00	1.00	0.00	1.00
Q Serve(g_s), s	183	766	806	55	627	655	731	0	0	727	0	749
Cycle O Clear(g_c), s	0.51	0.69	0.69	0.00	0.91	0.91	0.00	0.00	0.00	0.02	0.00	0.14
Prop In Lane	318	1196	1258	141	923	963	731	0	0	727	0	749
Lane Grp Cap(c), veh/h	2.00	2.00	2.00	2.00	2.00	2.00	1.00	1.00	1.00	1.00	1.00	1.00
VC Ratio(x)	0.91	0.91	0.91	0.00	1.00	1.00	1.00	0.00	0.00	0.00	0.00	1.00
Avail Cap(c_a), veh/h	28.2	6.0	6.0	0.0	17.4	17.4	18.1	0.0	0.0	18.3	0.0	19.3
HCM Platoon Ratio	2.0	1.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Upstream Filter(i)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Uniform Delay (d), s/veh	1.8	2.7	2.8	0.0	9.3	9.7	0.1	0.0	0.0	0.3	0.0	1.9
Incr Delay (d2), s/veh	30.2	7.0	7.0	0.0	26.8	26.5	18.1	0.0	0.0	18.3	0.0	19.7
Initial Q Delay(g3),s/veh	C	A	A	A	C	C	B	A	A	A	A	B
%ile BackQ(50%),veh/ln	C	A	A	A	C	C	B	A	A	A	A	B
Unsig. Movement Delay, s/veh	1186	8.9	8.9	26.7	1166	26.7	18.1	3	119	19.5	0	19.5
LnGrp Delay(d) s/veh	Approach Vol, veh/h	Approach Delay, s/veh	Approach LOS	Timer - Assigned Phs	Phs Duration (G+Y+Rc), s	Change Period (Y+Rc), s	Max Green Selling (Gmax) s	Max Q Clear Time (g_c+I1), s	Green Ext Time (g_c), s	Intersection Summary	HCM 6th Ctrl Delay	HCM 6th LOS
LnGrp LOS	8.9	26.7	18.1	2	4	6	7	8	17.8	17.8	17.8	B
Approach Delay, s/veh	Approach LOS	119	19.5	8	52.4	6.5	4.0	6.5	36.3	36.3	36.3	B
Approach LOS	119	19.5	19.5	8	52.4	6.5	4.0	6.5	36.3	36.3	36.3	B
Timer - Assigned Phs	8	8	8	8	8	8	8	8	8	8	8	8
Phs Duration (G+Y+Rc), s	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4	52.4
Change Period (Y+Rc), s	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5
Max Green Selling (Gmax) s	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
Max Q Clear Time (g_c+I1), s	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3
Green Ext Time (g_c), s	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3	36.3
Intersection Summary	17.8	17.8	17.8	17.8	17.8	17.8	17.8	17.8	17.8	17.8	17.8	17.8
HCM 6th Ctrl Delay	B	B	B	B	B	B	B	B	B	B	B	B
HCM 6th LOS	B	B	B	B	B	B	B	B	B	B	B	B

Smoke Tree Resort
2025 Total PM

4: Smoke Tree Access B & Lincoln Dr
HCM 6th TWSC

Intersection	0.7									
Int Delay, s/veh	EBT	EBR	WBL	WBT	NBL	NBR				
Movement	↕	↕	↕	↕	↕	↕				
Lane Configurations	↕	↕	↕	↕	↕	↕				
Traffic Vol, veh/h	978	20	36	1032	18	34				
Future Vol, veh/h	978	20	36	1032	18	34				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	0	0	-				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	1087	22	40	1147	20	38				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	1109	0	1752	555				
Stage 1	-	-	-	-	1098	-				
Stage 2	-	-	-	-	-	654				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	625	-	77	475				
Stage 1	-	-	-	-	281	-				
Stage 2	-	-	-	-	479	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	625	-	72	475				
Mov Cap-2 Maneuver	-	-	-	-	180	-				
Stage 1	-	-	-	-	263	-				
Stage 2	-	-	-	-	479	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0.4	19.7							
HCM LOS	C									
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	303	-	-	625	-					
HCM Lane V/C Ratio	0.191	-	-	0.064	-					
HCM Control Delay (s)	19.7	-	-	11.2	-					
HCM Lane LOS	C	-	-	B	-					
HCM 95th %ile Q(veh)	0.7	-	-	0.2	-					

Smoke Tree Resort
2025 Total PM

5: Lincoln Medical West & Lincoln Dr
HCM 6th TWSC

Intersection	0.7									
Int Delay, s/veh	EBT	EBR	WBL	WBT	NBL	NBR				
Movement	↕	↕	↕	↕	↕	↕				
Lane Configurations	↕	↕	↕	↕	↕	↕				
Traffic Vol, veh/h	1005	7	21	1038	30	26				
Future Vol, veh/h	1005	7	21	1038	30	26				
Conflicting Peds, #/hr	0	0	0	0	0	0				
Sign Control	Free	Free	Free	Free	Stop	Stop				
RT Channelized	-	None	-	None	-	None				
Storage Length	-	-	25	-	0	-				
Veh in Median Storage, #	0	-	-	0	0	-				
Grade, %	0	-	-	0	0	-				
Peak Hour Factor	90	90	90	90	90	90				
Heavy Vehicles, %	2	2	2	2	2	2				
Mvmt Flow	1117	8	23	1153	33	29				
Major/Minor	Major1	Major2	Minor1							
Conflicting Flow All	0	0	1125	0	1744	563				
Stage 1	-	-	-	-	1121	-				
Stage 2	-	-	-	-	-	623				
Critical Hdwy	-	-	4.14	-	6.84	6.94				
Critical Hdwy Stg 1	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	2.22	-	3.52	3.32				
Pl Cap-1 Maneuver	-	-	617	-	78	470				
Stage 1	-	-	-	-	273	-				
Stage 2	-	-	-	-	497	-				
Platoon blocked, %	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	617	-	75	470				
Mov Cap-2 Maneuver	-	-	-	-	185	-				
Stage 1	-	-	-	-	263	-				
Stage 2	-	-	-	-	497	-				
Approach	EB	WB	NB							
HCM Control Delay, s	0	0.2	23.4							
HCM LOS	C									
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT					
Capacity (veh/h)	257	-	-	617	-					
HCM Lane V/C Ratio	0.242	-	-	0.038	-					
HCM Control Delay (s)	23.4	-	-	11.1	-					
HCM Lane LOS	C	-	-	B	-					
HCM 95th %ile Q(veh)	0.9	-	-	0.1	-					

Smoke Tree Resort
2025 Total PM

6: Lincoln Medical East & Lincoln Dr
HCM 6th TWSC

Intersection	27											
Int Delay, s/veh	0.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBR	SBL	SBT	SBR	SBR
Lane Configurations	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖
Traffic Vol, veh/h	1027	4	0	1058	2	30	↖	↖	↖	↖	↖	↖
Future Vol, veh/h	1027	4	0	1058	2	30	↖	↖	↖	↖	↖	↖
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	None	-	None	-	None	-	None	-	None	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	0	0	-	-	-	-	-	-
Grade, %	0	-	-	0	0	0	-	-	-	-	-	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	1141	4	0	1176	2	33						
Major/Minor	Major1	Major2	Minor1									
Conflicting Flow All	0	0	-	-	-	-	1731	573				
Stage 1	-	-	-	-	-	-	1143	-				
Stage 2	-	-	-	-	-	-	588	-				
Critical Hdwy	-	-	-	-	-	-	684	6.94				
Critical Hdwy Stg 1	-	-	-	-	-	-	5.84	-				
Critical Hdwy Stg 2	-	-	-	-	-	-	5.84	-				
Follow-up Hdwy	-	-	-	-	-	-	3.52	3.32				
Pot Cap-1 Maneuver	-	-	-	-	-	-	79	463				
Stage 1	-	-	-	-	-	-	266	-				
Stage 2	-	-	-	-	-	-	518	-				
Platoon blocked, %	-	-	-	-	-	-	-	-				
Mov Cap-1 Maneuver	-	-	-	-	-	-	79	463				
Mov Cap-2 Maneuver	-	-	-	-	-	-	192	-				
Stage 1	-	-	-	-	-	-	266	-				
Stage 2	-	-	-	-	-	-	518	-				
Approach	EB	WB	NB									
HCM Control Delay, s	0	0	13.4									
HCM LOS	B											
Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBT								
Capacity (veh/h)	463	-	-	-								
HCM Lane V/C Ratio	0.072	-	-	-								
HCM Control Delay (s)	13.4	-	-	-								
HCM Lane LOS	B	-	-	-								
HCM 95th %ile Q(veh)	0.2	-	-	-								

Smoke Tree Resort
2025 Total PM

7: Apartment Drwy & Lincoln Dr
HCM 6th TWSC

Intersection	27											
Int Delay, s/veh	0.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBR	SBL	SBT	SBR	SBR
Lane Configurations	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖	↖
Traffic Vol, veh/h	8990	46	7	954	10	74	3	53	8	0	38	↖
Future Vol, veh/h	8990	46	7	954	10	74	3	53	8	0	38	↖
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	None	-	None	-	None	-	None	-	None	-	None
Storage Length	25	-	-	25	-	-	-	-	-	-	-	-
Veh in Median Storage, #	0	-	-	0	-	-	-	-	-	-	-	-
Grade, %	0	-	-	0	-	-	-	-	-	-	-	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	91100	51	8	1060	11	82	3	59	9	0	42	
Major/Minor	Major1	Major2	Minor1									
Conflicting Flow All	1071	0	0	1151	0	0	1690	2231	576	1652	-	536
Stage 1	-	-	-	-	-	-	1144	1144	-	1082	-	-
Stage 2	-	-	-	-	-	-	546	1087	-	570	-	-
Critical Hdwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	-	6.94
Critical Hdwy Stg 1	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.54	5.54	-	6.54	-	-
Follow-up Hdwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	-	3.32
Pot Cap-1 Maneuver	647	-	-	603	-	-	-61	42	460	65	0	489
Stage 1	-	-	-	-	-	-	213	273	-	232	0	-
Stage 2	-	-	-	-	-	-	490	290	-	474	0	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	647	-	-	603	-	-	-55	41	460	52	-	489
Mov Cap-2 Maneuver	-	-	-	-	-	-	-55	41	-	52	-	-
Stage 1	-	-	-	-	-	-	210	269	-	229	-	-
Stage 2	-	-	-	-	-	-	442	286	-	403	-	-
Approach	EB	WB	NB									
HCM Control Delay, s	0.1	0.1	\$ 443.8									
HCM LOS	F											
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2			
Capacity (veh/h)	85	647	-	-	603	-	-	52	489			
HCM Lane V/C Ratio	1.699	0.014	-	-	0.013	-	-	0.171	0.086			
HCM Control Delay (s)	\$ 443.8	10.6	-	-	11	-	-	88	13.1			
HCM Lane LOS	F	B	-	-	B	-	-	F	B			
HCM 95th %ile Q(veh)	12	0	-	-	0	-	-	0.6	0.3			

Smoke Tree Resort
2025 Total PM


8: AJ's Drwy & Lincoln Dr
HCM 6th TWSC

Intersection	4.1																				
Initial Delay, s/veh																					
EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR										
12	983	60	69	952	9	16	1	100	5	0	8										
Traffic Vol, veh/h	12	983	60	69	952	9	16	1	100	5	0										
Future Vol, veh/h	0	0	0	0	0	0	0	0	0	0	0										
Conflicting Peds, #/hr	Free											Free		Free		Free		Stop		Stop	
Sign Control	-											-		-		-		-		-	
RT Channelized	-											-		-		-		-		-	
Storage Length	25											-		-		-		-		-	
Veh in Median Storage, #	-											-		-		-		-		-	
Grade, %	-											-		-		-		-		-	
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90										
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2										
Mgmt Flow	13	1092	67	77	1058	10	18	1	111	6	0										
Major/Minor	Major1	Major2	Minor1								Minor2										
Conflicting Flow All	1068	0	0	1159	0	0	1835	2374	580	1790	-	534									
Stage 1	-	-	-	-	-	-	-	1152	-	1217	-	-									
Stage 2	-	-	-	-	-	-	-	683	1222	-	573	-									
Critical Hwy	4.14	-	-	4.14	-	-	7.54	6.54	6.94	7.54	-	6.94									
Critical Hwy Slg 1	-	-	-	-	-	-	-	6.54	5.54	-	6.54	-									
Critical Hwy Slg 2	-	-	-	-	-	-	-	6.54	5.54	-	6.54	-									
Follow-up Hwy	2.22	-	-	2.22	-	-	3.52	4.02	3.32	3.52	-	3.32									
Plat Cap-1 Maneuver	648	-	-	599	-	-	47	34	488	51	0	491									
Stage 1	-	-	-	-	-	-	-	210	270	-	192	0									
Stage 2	-	-	-	-	-	-	-	405	250	-	472	0									
Platoon blocked, %	-												-								
Mov Cap-1 Maneuver	648	-	-	599	-	-	41	29	458	33	-	491									
Mov Cap-2 Maneuver	-	-	-	-	-	-	-	41	29	-	33	-									
Stage 1	-	-	-	-	-	-	-	206	265	-	188	-									
Stage 2	-	-	-	-	-	-	-	347	218	-	349	-									
Approach	EB	WB	NB	SB									SB								
HCM Control Delay, s	0.1	0.8	0.8	62.9									59.6								
HCM LOS	F	F	F	F									F								
Minor Lane/Major Mvmt	NBLn1	EBL	EBT	EBR	WBL	WBT	WBR	SBLn1	SBLn2												
Capacity (veh/h)	182	648	-	-	599	-	-	33	491												
HCM Lane V/C Ratio	0.714	0.021	-	-	0.128	-	-	0.168	0.018												
HCM Control Delay (s)	62.9	10.7	-	-	11.9	-	-	135	12.5												
HCM Lane LOS	F	B	-	-	B	-	-	F	B												
HCM 95th %ile Q(veh)	4.5	0.1	-	-	0.4	-	-	0.5	0.1												

Smoke Tree Resort
2025 Total PM

9: Scottsdale Rd & Lincoln Dr
Timings

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	SBL	SBT	SBR
Lane Configurations	EB	EB	EB	WB	WB	WB	NB	NB	SB	SB	SB
Traffic Volume (vph)	569	61	481	61	68	461	1762	66	1702	546	546
Future Volume (vph)	569	61	481	61	68	461	1762	66	1702	546	546
Turn Type	Split	NA	pm+ov	Split	NA	pm+ov	Prot	NA	Prot	NA	pm+ov
Protected Phases	4	4	5	8	8	5	2	1	6	4	4
Permitted Phases	4	4	5	8	8	5	2	1	6	4	4
Detector Phase	4	4	5	8	8	5	2	1	6	4	4
Switch Phase											
Minimum Initial (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.0	10.0	5.0	10.0	7.0
Minimum Split (s)	13.0	13.0	13.0	13.0	13.0	13.0	16.7	11.0	16.0	13.0	13.0
Total Split (s)	32.0	32.0	27.0	21.0	21.0	27.0	54.0	23.0	50.0	32.0	32.0
Total Split (%)	24.6%	24.6%	20.8%	16.2%	16.2%	20.8%	41.5%	17.7%	38.5%	24.6%	24.6%
Yellow Time (s)	4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0	4.0
All-Red Time (s)	1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5	5.5
Lead/Lag	Lead										
Lead-Lag Optimize?	None										
Recall Mode	None	None	None	None	None	None	None	None	None	C-Max	None
Act Effct Green (s)	26.5	26.5	49.8	9.7	9.7	23.3	64.1	9.7	48.2	80.4	80.4
Actuated g/C Ratio	0.20	0.20	0.38	0.07	0.07	0.18	0.49	0.07	0.37	0.62	0.62
v/C Ratio	1.02	1.02	0.77	0.52	0.50	0.83	0.81	0.55	1.00	0.57	0.57
Control Delay	116.0	115.7	24.0	71.2	32.4	63.8	32.3	72.8	62.7	11.4	11.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	116.0	115.7	24.0	71.2	32.4	63.8	32.3	72.8	62.7	11.4	11.4
LOS	F	F	C	E	C	E	C	E	C	E	B
Approach Delay	76.1										
Approach LOS	E										
Intersection Summary	Intersection LOS: D										
Cycle Length: 130											
Actuated Cycle Length: 130											
Offset: 0 (0%), Referenced to phase 6:SBT, Start of Green											
Natural Cycle: 100											
Control Type: Actuated-Coordinated											
Maximum v/C Ratio: 1.02											
Intersection Signal Delay: 50.6											
Intersection Capacity Utilization 87.8%											
Analysis Period (min) 15											

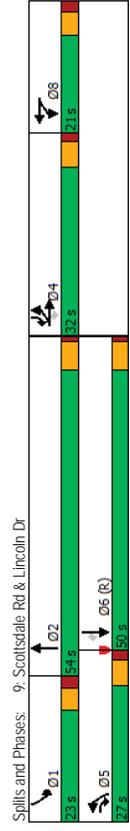

Smoke Tree Resort
2025 Total PM

9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	4	1	1	1	1	1	1	1	1	1	1
Traffic Volume (veh/h)	569	61	481	61	68	78	461	1762	50	66	1702	546
Future Volume (veh/h)	569	61	481	61	68	78	461	1762	50	66	1702	546
Initial Q (Q _{bb}) veh	0	0	0	0	0	0	0	0	0	0	0	0
Ped-Bike Adj(A_pb1)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No	No	No	No	No	No	No	No	No	No	No	No
Adj Sat Flow, veh/hln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	681	0	534	68	76	87	512	1958	56	73	1891	607
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	726	0	580	128	128	114	559	2306	66	93	1740	863
Arrive On Green	0.07	0.00	0.07	0.07	0.07	0.07	0.16	0.45	0.45	0.05	0.34	0.34
Sat Flow, veh/h	3563	0	1585	1781	1777	1585	3456	5102	146	1781	5106	1585
Grp Volume(v), veh/h	681	0	534	68	76	87	512	1305	709	73	1891	607
Grp Sat Flow(s), veh/hln	1781	0	1585	1781	1777	1585	1728	1702	1844	1781	1702	1585
Q Serve(g_s), s	24.7	0.0	26.5	4.8	5.4	7.0	19.0	44.3	44.5	5.3	44.3	36.7
Prop In Lane	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.08	1.00	1.00	1.00
Lane Grp Cap(c), veh/h	726	0	580	128	128	114	559	1538	833	93	1740	863
V/C Ratio(x)	0.94	0.00	0.92	0.53	0.59	0.76	0.92	0.85	0.85	0.78	1.09	0.70
Avail Cap(c), veh/h	726	0	580	211	210	188	572	1538	833	243	1740	863
HCM Platoon Ratio	0.33	0.33	0.33	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(i)	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	59.8	0.0	44.7	58.2	58.5	59.2	53.6	31.7	31.7	60.9	42.9	21.8
Incr Delay (d2), s/veh	19.5	0.0	19.9	1.3	1.6	3.9	18.8	4.4	7.9	5.4	49.3	4.8
Initial Q Delay(Q3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%)veh/h	13.9	0.0	18.8	2.2	2.5	2.9	9.7	18.8	21.3	2.5	26.3	21.3
Unsig. Movement Delay, s/veh	79.3	0.0	64.6	59.5	60.1	63.1	72.5	36.1	39.7	66.2	92.2	26.6
LnGrp Delay(d),s/veh	E	A	E	E	E	E	E	D	D	E	F	C
LnGrp LOS	E	A	E	E	E	E	E	D	D	E	F	C
Approach Vol, veh/h	1215		231				2526				2571	
Approach Delay, s/veh	72.9		61.1				44.5				76.0	
Approach LOS	E		E				D				E	
Timer - Assigned PHS	1	2	2	4	5	6	8					
Phs Duration (G+Y+Rc), s	12.1	64.4	32.0	26.5	50.0	15.0						
Change Period (Y+Rc), s	* 5.3	5.7	5.5	5.5	5.7	5.6						
Max Green Stalling (Gmax), s	* 18	48.3	26.5	21.5	44.3	15.4						
Max Q Clear Time (g_c+1t), s	7.3	46.5	28.5	21.0	46.3	9.0						
Green Ext Time (g_e), s	0.0	1.0	0.0	0.1	0.0	0.4						

Intersection Summary
HCM 6th Ctrl Delay 62.7
HCM 6th LOS E

Notes
User approved pedestrian interval to be less than phase max green.
User approved volume balancing among the lanes for turning movement.
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.

Smoke Tree Resort
2025 Total PM

10: Quail Run Rd & Access A
HCM 6th TWSC


Intersection	0											
In Delay, s/veh	0											
Movement	WBL	WBR	NBT	NBR	SBL	SBT						
Lane Configurations	W	W	T	T	T	T						
Traffic Vol, veh/h	0	1	0	0	0	1						
Future Vol, veh/h	0	1	0	0	0	1						
Conflicting Peds, #/hr	0	0	0	0	0	0						
Sign Control	Stop	Stop	Free	Free	Free	Free						
RT Channelized	-	None	-	None	-	None						
Storage Length	0	-	-	-	-	-						
Veh in Median Storage, #	0	-	0	-	-	0						
Grade, %	0	-	0	-	-	0						
Peak Hour Factor	90	90	90	90	90	90						
Heavy Vehicles, %	2	2	2	2	2	2						
Mvmt Flow	0	1	0	0	0	1						
Major/Minor	Minor1	Major1	Major1	Major2								
Conflicting Flow All	2	0	0	0	0	0						
Stage 1	0	-	-	-	-	-						
Stage 2	2	-	-	-	-	-						
Critical Hdwy	6.42	6.22	-	-	-	4.12						
Critical Hdwy Stg 1	5.42	-	-	-	-	-						
Critical Hdwy Stg 2	5.42	-	-	-	-	-						
Follow-up Hdwy	3.518	3.318	-	-	-	2.218						
Pd Cap-1 Maneuver	1021	-	-	-	-	-						
Stage 1	-	-	-	-	-	-						
Stage 2	1021	-	-	-	-	-						
Platoon blocked, %	-	-	-	-	-	-						
Mov Cap-1 Maneuver	1021	-	-	-	-	-						
Mov Cap-2 Maneuver	1021	-	-	-	-	-						
Stage 1	-	-	-	-	-	-						
Stage 2	1021	-	-	-	-	-						
Approach	WB	NB	SB									
HCM Control Delay, s	0											
HCM LOS												
Minor Lane/Major Mvmt	NBT	NBR	WBLn1	SBL	SBT							
Capacity (veh/h)	-	-	-	-	-							
HCM Lane V/C Ratio	-	-	-	-	-							
HCM Control Delay (s)	-	-	-	-	-							
HCM Lane LOS	-	-	-	-	-							
HCM 95th %ile Q(veh)	-	-	-	-	-							

Intersection Summary
HCM 6th LOS
HCM 95th %ile Q(veh)

Smoke Tree Resort
2025 Total PM Mitigated

9: Scottsdale Rd & Lincoln Dr
Timings

	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Group										
Lane Configurations	569	61	481	61	68	461	1762	66	1702	546
Traffic Volume (vph)	569	61	481	61	68	461	1762	66	1702	546
Future Volume (vph)	Split	NA	pm+ov	Split	NA	Prdt	NA	Prdt	NA	pm+ov
Turn Type	4	4	5	8	8	5	2	1	6	4
Protected Phases										
Permitted Phases	4	4	4	4	4	4	4	4	4	4
Detector Phase										
Switch Phase										
Minimum Initial (s)	7.0	7.0	7.0	7.0	7.0	7.0	10.0	5.0	10.0	7.0
Minimum Split (s)	13.0	13.0	13.0	13.0	13.0	13.0	16.7	11.0	16.0	13.0
Total Split (s)	30.0	30.0	21.0	19.0	19.0	21.0	58.0	13.0	50.0	30.0
Total Split (%)	25.0%	25.0%	17.5%	15.8%	15.8%	17.5%	48.3%	10.8%	41.7%	25.0%
Yellow Time (s)	4.0	4.0	4.0	3.6	3.6	4.0	4.7	3.3	4.7	4.0
All-Red Time (s)	1.5	1.5	1.5	2.0	2.0	1.5	1.0	2.0	1.0	1.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	5.5	5.5	5.5	5.6	5.6	5.5	5.7	5.3	5.7	5.5
Lead/Lag										
Lead/Lag Optimize?	None	C-Max	None							
Recall Mode	24.5	24.5	44.0	9.4	9.4	19.5	57.8	8.4	44.3	74.5
Act Effct Green (s)	0.20	0.20	0.37	0.08	0.08	0.16	0.48	0.07	0.37	0.62
Actuated g/C Ratio	1.01	1.01	0.82	0.49	0.49	0.92	0.83	0.59	1.01	0.56
v/c Ratio	100.0	99.6	29.0	64.6	29.9	72.4	31.6	73.2	60.5	9.2
Control Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	100.0	99.6	29.0	64.6	29.9	72.4	31.6	73.2	60.5	9.2
LOS	F	F	C	E	C	E	C	E	E	A
Approach Delay										
Approach LOS	E	E	D	D	D	D	D	D	D	D
Intersection Summary										
Cycle Length: 120										
Actuated Cycle Length: 120										
Offset: 0 (0%), Referenced to phase 6, SBT, Start of Green										
Natural Cycle: 100										
Control Type: Actuated-Coordinated										
Maximum v/c Ratio: 1.01										
Intersection Signal Delay: 48.9										
Intersection Capacity Utilization 87.8%										
Analysis Period (min) 15										

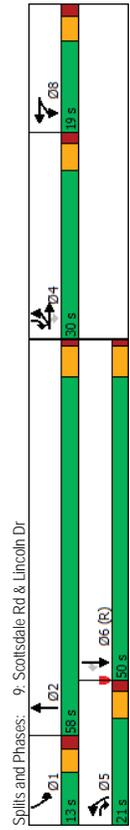


Smoke Tree Resort
2025 Total PM Mitigated

9: Scottsdale Rd & Lincoln Dr
HCM 6th Signalized Intersection Summary

	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Movement										
Lane Configurations	569	61	481	61	68	461	1762	66	1702	546
Traffic Volume (veh/h)	569	61	481	61	68	461	1762	66	1702	546
Future Volume (veh/h)	0	0	0	0	0	0	0	0	0	0
Initial Q (Obs.) veh	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pbT)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Parking Bus, Adj	No	No	No	No	No	No	No	No	No	No
Work Zone On Approach	No	No	No	No	No	No	No	No	No	No
Adj Sat Flow, veh/h	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	681	0	534	68	76	87	512	1958	56	73
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2
Cap. veh/h	727	0	528	130	116	446	2285	65	93	1885
Arrive On Green	0.20	0.00	0.20	0.07	0.07	0.13	0.45	0.45	0.05	0.37
Sat Flow, veh/h	3563	0	1585	1781	1777	1585	3456	5102	146	1781
Grp Volume(v), veh/h	681	0	534	68	76	87	512	1305	709	73
Grp Sat Flow(s),veh/h	1781	0	1585	1781	1777	1585	1728	1702	1844	1781
Cycle O Clear(g_c), s	22.6	0.0	24.5	4.4	5.0	6.5	15.5	41.2	41.4	4.9
Prop In Lane	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
V/C Ratio(X)	0.94	0.00	1.01	0.52	0.59	0.75	1.15	0.86	0.86	0.79
Avail Cap(c), veh/h	727	0	528	199	198	177	446	1524	826	114
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter()	1.00	0.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	47.0	0.0	40.0	53.6	53.9	54.6	52.3	29.7	29.7	56.2
Incr Delay (d2), s/veh	19.2	0.0	41.8	1.2	1.6	3.7	89.4	4.8	8.6	19.7
Initial O Delay(d3),s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOf(60%) veh/m	11.9	0.0	21.5	2.0	2.3	2.7	12.2	17.4	19.8	2.7
Unsig. Movement Delay, s/veh	66.2	0.0	81.8	54.8	55.4	58.2	141.7	34.5	38.3	75.9
LnGrp Delay(d)S/veh	E	A	F	D	E	E	F	C	D	E
LnGrp LOS	E	A	F	D	E	E	F	C	D	E
Approach Vol, veh/h	1215			231			2526			2571
Approach Delay, s/veh	73.1			56.3			57.3			50.9
Approach LOS	E			E			E			D
Timer - Assigned Phs	1	2	4	5	6	8				
Phs Duration (G+Y+Rc), s	11.6	59.4	30.0	21.0	50.0	14.4				
Change Period (Y+Rc), s	* 5.3	5.7	5.5	5.5	5.7	5.6				
Max Green Selling (Gmax), s	* 7.7	52.3	24.5	15.5	44.3	13.4				
Max Q Clear Time (g_c+I1), s	6.9	43.4	26.5	17.5	46.3	8.5				
Green EXT Time (g_e), s	0.0	2.7	0.0	0.0	0.0	0.3				
Intersection Summary										
HCM 6th Ctrl Delay										
HCM 6th LOS										
Notes										
User approved pedestrian interval to be less than phase max green.										
User approved volume balancing among the lanes for turning movement.										
* HCM 6th computational engine requires equal clearance times for the phases crossing the barrier.										

APPENDIX I

QUEUE STORAGE ANALYSIS




Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	269	1209	28	1132	7	69	94	388
v/c Ratio	0.75	0.52	0.13	0.63	0.05	0.29	0.27	0.85
Control Delay	30.1	14.1	8.6	11.4	29.7	34.6	36.4	49.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	30.1	14.1	8.6	11.4	29.7	34.6	36.4	49.1
Queue Length 50th (ft)	86	235	1	23	5	36	64	225
Queue Length 95th (ft)	231	473	m29	#729	13	68	85	310
Internal Link Dist (ft)		105		1255		475		337
Turn Bay Length (ft)	150		95		80		135	
Base Capacity (vph)	430	2345	221	1794	299	422	588	730
Starvation Cap Reductn	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.63	0.52	0.13	0.63	0.02	0.16	0.16	0.53

Intersection Summary


95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.




Lane Group	EBL	EBT	WBL	WBT	NBT	SBL	SBT
Lane Group Flow (vph)	128	1245	2	1054	10	29	73
v/c Ratio	0.55	0.70	0.02	0.77	0.01	0.05	0.09
Control Delay	35.4	35.7	21.5	38.4	0.0	28.4	0.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	35.4	35.7	21.5	38.4	0.0	28.4	0.2
Queue Length 50th (ft)	73	416	1	402	0	15	0
Queue Length 95th (ft)	151	626	6	426	0	42	0
Internal Link Dist (ft)		1255		319	137		291
Turn Bay Length (ft)	25		25				
Base Capacity (vph)	297	2382	149	1834	689	562	798
Starvation Cap Reductn	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.43	0.52	0.01	0.57	0.01	0.05	0.09
Intersection Summary							



Lane Group	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Group Flow (vph)	300	303	564	46	101	368	1636	61	2016	740
v/c Ratio	0.90	0.90	0.89	0.38	0.37	0.76	0.65	0.50	0.98	0.63
Control Delay	77.0	77.0	35.4	62.1	28.9	60.3	25.1	67.8	50.5	8.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	77.0	77.0	35.4	62.1	28.9	60.3	25.1	67.8	50.5	8.4
Queue Length 50th (ft)	238	241	228	35	16	142	347	46	560	133
Queue Length 95th (ft)	#404	#408	#317	73	45	194	436	91	#732	274
Internal Link Dist (ft)		389			130		477		335	
Turn Bay Length (ft)	175			90		275		185		
Base Capacity (vph)	343	346	641	197	412	497	2524	130	2067	1175
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.87	0.88	0.88	0.23	0.25	0.74	0.65	0.47	0.98	0.63

Intersection Summary


95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.




Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	297	1100	30	1216	9	99	78	246
v/c Ratio	0.76	0.43	0.11	0.63	0.05	0.57	0.30	0.62
Control Delay	30.7	9.2	3.3	6.4	37.2	62.3	42.7	25.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	30.7	9.2	3.3	6.4	37.2	62.3	42.7	25.8
Queue Length 50th (ft)	115	190	1	22	6	72	54	70
Queue Length 95th (ft)	230	291	m8	578	20	127	91	164
Internal Link Dist (ft)		105		1255		475		337
Turn Bay Length (ft)	150		95		80		135	
Base Capacity (vph)	441	2534	263	1915	313	408	566	743
Starvation Cap Reductn	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.67	0.43	0.11	0.63	0.03	0.24	0.14	0.33

Intersection Summary

m Volume for 95th percentile queue is metered by upstream signal.



Lane Group	EBL	EBT	WBT	NBT	SBL	SBT
Lane Group Flow (vph)	94	1092	1166	3	16	103
v/c Ratio	0.43	0.58	0.78	0.00	0.03	0.14
Control Delay	28.4	19.9	35.7	0.0	31.2	0.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	28.4	19.9	35.7	0.0	31.2	0.4
Queue Length 50th (ft)	41	264	436	0	9	0
Queue Length 95th (ft)	92	289	458	0	29	0
Internal Link Dist (ft)		1255	319	137		291
Turn Bay Length (ft)	25					
Base Capacity (vph)	292	2382	1831	648	524	749
Starvation Cap Reductn	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0
Reduced v/c Ratio	0.32	0.46	0.64	0.00	0.03	0.14
Intersection Summary						



Lane Group	EBL	EBT	EBR	WBL	WBT	NBL	NBT	SBL	SBT	SBR
Lane Group Flow (vph)	348	352	534	68	163	512	2014	73	1891	607
v/c Ratio	1.01	1.01	0.82	0.49	0.49	0.92	0.83	0.59	1.01	0.56
Control Delay	100.0	99.6	29.0	64.6	29.9	72.4	31.6	73.2	60.5	9.2
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	100.0	99.6	29.0	64.6	29.9	72.4	31.6	73.2	60.5	9.2
Queue Length 50th (ft)	~292	~295	210	52	30	202	503	55	~540	138
Queue Length 95th (ft)	#495	#501	#346	97	63	#344	597	#120	#658	232
Internal Link Dist (ft)		389			130		477		335	
Turn Bay Length (ft)	175			90		275		185		
Base Capacity (vph)	343	347	654	197	440	558	2441	130	1877	1080
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	1.01	1.01	0.82	0.35	0.37	0.92	0.83	0.56	1.01	0.56

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

**Signalized Intersection
2025**

Average Vehicle Length (ft): 25

Cycles: 2

Intersection Cycle Length (sec): 130

Equation Used: storage length = 2 x (vehicles/hour)/(cycles/hour) x average vehicle length

Intersection	Approach	AM Peak (veh/hr)	Midday Peak	PM Peak (veh/hr)	Max vehs per 2 cycles	Max trucks per 2 cycles	Storage Length
Mockingbird Lane & Lincoln Dr	NB Left	6	0	8	1	0	25'
	SB Left	85	0	70	7	0	175'
	EB Left	242	0	267	20	0	500'
	WB Left	25	0	27	2	0	50'
	NB Right	25	0	21	2	0	50'
	SB Right	253	0	169	19	0	475'
	EB Right	33	0	32	3	0	75'
	WB Right	48	0	71	6	0	150'
Quail Run Rd & Lincoln Dr	NB Left	1	0	1	1	0	25'
	SB Left	26	0	14	2	0	50'
	EB Left	115	0	85	9	0	225'
	WB Left	2	0	0	1	0	25'
	NB Right	8	0	2	1	0	25'
	SB Right	66	0	93	7	0	175'
	EB Right	4	0	2	1	0	25'
	WB Right	12	0	25	2	0	50'
Scottsdale Rd & Lincoln Dr	NB Left	331	0	461	34	0	850'
	SB Left	55	0	66	5	0	125'
	EB Left	500	0	569	42	0	1050'
	WB Left	41	0	61	5	0	125'
	NB Right	43	0	50	4	0	100'
	SB Right	666	0	546	49	0	1225'
	EB Right	508	0	481	37	0	925'
	WB Right	52	0	78	6	0	150'

Unsignalized Intersection
2025

Average Vehicle Length (ft): 25

Equation Used: $\text{storage length} = 2 \times (\text{vehicles/hour}) / (60 \text{ minutes/hour}) \times \text{average vehicle length}$

Intersection	Approach	AM Peak (veh/hr)	Midday Peak	PM Peak (veh/hr)	Veh per 2 minutes	Trucks per 2 minutes	Storage Length
Smoke Tree Access B & Lincoln Dr	NB Left	16	0	18	1	0	25'
	SB Left	0	0	0	0	0	0'
	EB Left	0	0	0	0	0	0'
	WB Left	26	0	36	2	0	50'
	NB Right	22	0	34	2	0	50'
	SB Right	0	0	0	0	0	0'
	EB Right	17	0	20	1	0	25'
	WB Right	0	0	0	0	0	0'

APPENDIX J

SIGHT DISTANCE ANALYSIS

Smoke Tree

Sight Distance Analysis

Location: Smoke Tree Access B & Lincoln Dr

Assumptions and/or Givens

<i>Elements of Design from AASHTO</i>	<i>6th Edition</i>	<i>AASHTO Ref</i>
Driver Eye Height		
Passenger Vehicle	3.50 ft	§3.2.6, p 3-14
Truck	7.60 ft	§3.2.6, p 3-14
Object Height		
Stopping Sight Distance	2.00 ft	§3.2.6, p 3-14
Passing Sight Distance	3.50 ft	§3.2.6, p 3-14
Vehicle Height	4.25 ft	§3.2.6, p 3-14
Driver Eye Location		
From Edge of Major Rd Traveled Way	14.50 ft	9.5.3, B1
Deceleration Rate (a)		
Passenger Vehicle	11.20 ft/sec ²	§3.2.2, p 3-3
Truck	N/A ft	
Brake reaction time (t)	2.50 sec	§3.2.2, p 3-4

Site Specific Data (Bike & turn lanes are outside traveled way and are not considered)

Major Street Design Speed (V_{major})	45 MPH							
Grades - Approaching Minor Street from: (– = approaching downhill)								
Left (G_L)	0.00 %							
Right (G_R)	0.00 %							
Approach Grade Adjustment Factor	Left 1.0	Tbl 9-4, p 9-35						
	Right 1.0							
Major Road Through Lanes on Each Approach	2.0	(Use 1 for RI/RO/[LI] only)						
Median Width (in "Lane Equivalents")	12.0	(Use 0 for RI/RO/[LI] only)						
Minor Road Approach Upgrade, if >3%	0.00 %							
Minor Road Access (check restricted)	<table border="1" style="width: 100%; text-align: center;"> <tr> <td style="width: 33%;"></td> <td style="width: 33%;"></td> <td style="width: 33%;"></td> </tr> <tr> <td>LI</td> <td>LO/Th</td> <td>RO</td> </tr> </table>					LI	LO/Th	RO
LI	LO/Th	RO						

Stopping Sight Distance = Brake Reaction Distance + Braking Distance

Neglecting Effect of Grade $d = 1.47Vt + 1.075 \frac{V^2}{a}$ Eq 3-2, p 3-4

Calculated d= 359.8 ft
Design d= 360 ft

With Effect of Grade $d = 1.47Vt + \frac{V^2}{30((\frac{a}{32.2}) \pm G)}$ Eq 3-3, p 3-5

Calculated d= 359.1 ft - left
360 ft - right
Design d= 359.1 ft - left
360 ft - right

SSD's do not consider design for truck operations, since better visibility is considered to offset longer braking distance. §3.2.2, p 3-6



Smoke Tree

Sight Distance Analysis

Location: Smoke Tree Access B & Lincoln Dr

Intersection Sight Distances

Case B—Intersections with Stop Control on the Minor Road

AASHTO Ref
§9.5.3, p 9-36

Case B1—Left Turn from the Minor Road

§9.5.3, p 9-36

Design Vehicle	Time Gap (t _g)	
Passenger Car	7.5 sec	Tbl 9-5, p 9-37
Single-Unit Tuck	9.5 sec	Tbl 9-5, p 9-37
Combination Truck	11.5 sec	Tbl 9-5, p 9-37
Time gap adjustments		
Add'l lanes to cross (1 st is assumed)		
Passenger Car	0.5 sec	See Notes
Trucks	0.7 sec	below
Minor Approach Upgrade (Per each 1%>3%)	0.2 sec	Tbl 9-5, p 9-37

Site data

Major Road Lanes on Left Approach	2.0	§9.5.3, p 9-37
Minor Road Approach Upgrade, if >3%	0 %	§9.5.3, p 9-37

Time Gap based on site data

Design Vehicle Gap+Adj for Approach Grade>3%+Adjs for Add'l Lanes & Median

Passenger Car	14.0 sec
Single-Unit Tuck	18.6 sec
Combination Truck	20.6 sec

ISD to left & right along Major Road $ISD=1.47V_{major}t_g$ (ft) Eq 9-1, p 9-37

		ISD to Left and Right
Passenger Car	calculated ISD=	926.1 ft
	design ISD=	930 ft
Single-Unit Tuck	calculated ISD=	1230.4 ft
	design ISD=	1235 ft
Combination Truck	calculated ISD=	1362.7 ft
	design ISD=	1365 ft

Smoke Tree

Location: Smoke Tree Access B & Lincoln Dr

Sight Distance Analysis

Intersection Sight Distances (cont'd)

<u>Case B2—Right Turn from the Minor Road</u>	AASHTO Ref
&	§9.5.3, p 9-40
<u>Case B3—Crossing Maneuver from the Minor Road</u>	§9.5.3, p 9-43

Design Vehicle	Time Gap (t _g)	
Passenger Car	6.5 sec	Tbl 9-7, p 9-40
Single-Unit Truck	8.5 sec	Tbl 9-7, p 9-40
Combination Truck	10.5 sec	Tbl 9-7, p 9-40

Time gap adjustments - Case B-3 Only*		
Add'l lanes to cross (1 st is assumed)		
Passenger Car	0.5 sec	See Notes
Trucks	0.7 sec	below
Minor Approach Upgrade (Per each 1%>3%)	0.1 sec	Tbl 9-7, p 9-40

Site data		
Major Road Lanes on Left Approach	2.0	§9.5.3, p 9-40
Minor Road Approach Upgrade, if >3%	0 %	§9.5.3, p 9-40

Time Gap based on site data (sec)	<u>B2 & B3</u>	<u>B3 Only</u>
<i>Design Vehicle Gap+Adj for Approach Grade>3%(+Adjs for Add'l Lanes & Median for B3)</i>		
Passenger Car	13.0	13.5
Single-Unit Truck	17.6	18.3
Combination Truck	19.6	20.3

ISD to left (B2/B3) & right (B3) along Major Rd $ISD=1.47V_{major}t_g$ (ft) Eq 9-1, p 9-37

			<u>ISD to Left</u>	<u>ISD to right</u>
			<u>(B2 & B3)</u>	<u>(B3 Only)</u>
Passenger Car	calculated ISD=	860.0	893.0	
	design ISD=	860	895	
Single-Unit Truck	calculated ISD=	1164.2	1210.5	
	design ISD=	1165	1215	
Combination Truck	calculated ISD=	1296.5	1342.8	
	design ISD=	1300	1345	

*Number of major road lanes is irrelevant in Case B2.

The differences between Case B1 and Cases B2 & B3 are reduced time gaps and time gap adjustment for the minor approach upgrade. §9.5.3, p 9-43



Smoke Tree

Sight Distance Analysis

Location: Smoke Tree Access B & Lincoln Dr

Intersection Sight Distances (cont'd)

Case F—Left Turns from the Major Road

AASHTO Ref
§9.5.3, p 9-51

Design Vehicle	Time Gap (t_g)	
Passenger Car	5.5 sec	bl 9-13, p 9-51
Single-Unit Truck	6.5 sec	bl 9-13, p 9-51
Combination Truck	7.5 sec	bl 9-13, p 9-51
Time gap adjustments		
Add'l lanes to cross (1 assumed)		
Passenger Car	0.5 sec	See Notes to
Trucks	0.7 sec	bl 9-13, p 9-51
Site data		
Opposing Lanes (adj'd for x-wide median)	13.0	
Time Gap based on site data		
<i>Design Vehicle Gap+Adj for Add'l Opposing Lanes</i>		
Passenger Car	12.0 sec	
Single-Unit Truck	15.6 sec	
Combination Truck	16.6 sec	
ISD to front along Major Road	$ISD=1.47V_{major}t_g$ (ft)	Eq 9-1, p 9-37
Passenger Car	calculated ISD= 793.8 ft design ISD= 795 ft	
Single-Unit Truck	calculated ISD= 1031.9 ft design ISD= 1035 ft	
Combination Truck	calculated ISD= 1098.1 ft design ISD= 1100 ft	

The differences between Case F and Cases B1, B2 & B3 are reduced time gaps and no time gap adjustment for any minor approach upgrade. §9.5.3, p 9-43

SIGHT DISTANCE SUMMARY

Sight Distance Type	Governing Case	Car	SU Truck	Combo Truck
Stopping				
Without effect of grade		360	N/A	N/A
With effect of grade on left		360	N/A	N/A
With effect of grade on right		360	N/A	N/A
Intersection				
To Right	B1	930	1235	1365
To Left	B2/B3	860	1165	1300
On Major Road	F	795	1035	1100



Smoke Tree Resort

Location: Quail Run Road

Sight Distance Analysis

Assumptions and/or Givens

<i>Elements of Design from AASHTO</i>	<i>6th Edition</i>	<i>AASHTO Ref</i>
Driver Eye Height		
Passenger Vehicle	3.50 ft	§3.2.6, p 3-14
Truck	7.60 ft	§3.2.6, p 3-14
Object Height		
Stopping Sight Distance	2.00 ft	§3.2.6, p 3-14
Passing Sight Distance	3.50 ft	§3.2.6, p 3-14
Vehicle Height	4.25 ft	§3.2.6, p 3-14
Driver Eye Location		
From Edge of Major Rd Traveled Way	14.50 ft	9.5.3, B1
Deceleration Rate (a)		
Passenger Vehicle	11.20 ft/sec ²	§3.2.2, p 3-3
Truck	N/A ft	
Brake reaction time (t)	2.50 sec	§3.2.2, p 3-4

Site Specific Data (Bike & turn lanes are outside traveled way and are not considered)

Major Street Design Speed (V _{major})	30 MPH	
Grades - Approaching Minor Street from: (– = approaching downhill)		
Left (G _L)	%	
Right (G _R)	%	
Approach Grade Adjustment Factor	Left 1.0	Tbl 9-4, p 9-35
	Right 1.0	
Major Road Through Lanes on Each Approach	1.0 (Use 1 for RI/RO/[LI] only)	
Median Width (in "Lane Equivalents")	0.0 (Use 0 for RI/RO/[LI] only)	
Minor Road Approach Upgrade, if >3%	%	
Minor Road Access (check restricted)		
	LI	LO/Th RO

Stopping Sight Distance = Brake Reaction Distance + Braking Distance

<u>Neglecting Effect of Grade</u>	Eq 3-2, p 3-4
$d = 1.47Vt + 1.075 \frac{V^2}{a}$	
Calculated d= 196.7 ft	
Design d= 200 ft	

<u>With Effect of Grade</u>	Eq 3-3, p 3-5
$d = 1.47Vt + \frac{V^2}{30((\frac{a}{32.2}) \pm G)}$	
Calculated d= 196.3 ft - left	
200 ft - right	
Design d= 196.3 ft - left	
200 ft - right	

SSD's do not consider design for truck operations, since better visibility is considered to offset longer braking distance. §3.2.2, p 3-6



Smoke Tree Resort

Location: Quail Run Road

Sight Distance Analysis

Intersection Sight Distances

Case B—Intersections with Stop Control on the Minor Road

AASHTO Ref
§9.5.3, p 9-36

Case B1—Left Turn from the Minor Road

§9.5.3, p 9-36

Design Vehicle	Time Gap (t _g)	
Passenger Car	7.5 sec	Tbl 9-5, p 9-37
Single-Unit Truck	9.5 sec	Tbl 9-5, p 9-37
Combination Truck	11.5 sec	Tbl 9-5, p 9-37

Time gap adjustments

Add'l lanes to cross (1 st is assumed)		
Passenger Car	0.5 sec	See Notes
Trucks	0.7 sec	below
Minor Approach Upgrade (Per each 1%>3%)	0.2 sec	Tbl 9-5, p 9-37

Site data

Major Road Lanes on Left Approach	1.0	§9.5.3, p 9-37
Minor Road Approach Upgrade, if >3%	0 %	§9.5.3, p 9-37

Time Gap based on site data

Design Vehicle Gap+Adj for Approach Grade>3%+Adjs for Add'l Lanes & Median

Passenger Car	7.5 sec
Single-Unit Truck	9.5 sec
Combination Truck	11.5 sec

ISD to left & right along Major Road ISD=1.47V_{major}t_g (ft) Eq 9-1, p 9-37

	ISD to Left and Right
Passenger Car	calculated ISD= 330.8 ft design ISD= 335 ft
Single-Unit Truck	calculated ISD= 419.0 ft design ISD= 420 ft
Combination Truck	calculated ISD= 507.2 ft design ISD= 510 ft



Smoke Tree Resort
Location: Quail Run Road

Sight Distance Analysis

Intersection Sight Distances (cont'd)

			<i>AASHTO Ref</i>
<u>Case B2—Right Turn from the Minor Road</u>			§9.5.3, p 9-40
&			
<u>Case B3—Crossing Maneuver from the Minor Road</u>			§9.5.3, p 9-43
Design Vehicle	Time Gap (t _g)		
Passenger Car	6.5 sec	Tbl 9-7, p 9-40	
Single-Unit Tuck	8.5 sec	Tbl 9-7, p 9-40	
Combination Truck	10.5 sec	Tbl 9-7, p 9-40	
Time gap adjustments - Case B-3 Only*			
Add'l lanes to cross (1 st is assumed)			
Passenger Car	0.5 sec	See Notes	
Trucks	0.7 sec	below	
Minor Approach Upgrade (Per each 1%>3%)	0.1 sec	Tbl 9-7, p 9-40	
Site data			
Major Road Lanes on Left Approach	1.0	§9.5.3, p 9-40	
Minor Road Approach Upgrade, if >3%	0 %	§9.5.3, p 9-40	

Time Gap based on site data (sec)	<u>B2 & B3</u>	<u>B3 Only</u>
<i>Design Vehicle Gap+Adj for Approach Grade>3%(+Adjs for Add'l Lanes & Median for B3)</i>		
Passenger Car	6.5	6.5
Single-Unit Tuck	8.5	8.5
Combination Truck	10.5	10.5

ISD to left (B2/B3) & right (B3) along Major Rd ISD=1.47V_{major}t_g (ft) Eq 9-1, p 9-37

			ISD to Left	ISD to right
			(B2 & B3)	(B3 Only)
Passenger Car	calculated ISD=	286.7	286.7	
	design ISD=	290	290	
Single-Unit Tuck	calculated ISD=	374.9	374.9	
	design ISD=	375	375	
Combination Truck	calculated ISD=	463.1	463.1	
	design ISD=	465	465	

*Number of major road lanes is irrelevant in Case B2.

The differences between Case B1 and Cases B2 & B3 are reduced time gaps and time gap adjustment for the minor approach upgrade. §9.5.3, p 9-43



Smoke Tree Resort
Location: Quail Run Road

Sight Distance Analysis

Intersection Sight Distances (cont'd)

			<i>AASHTO Ref</i>
<u>Case F—Left Turns from the Major Road</u>			§9.5.3, p 9-51
Design Vehicle	Time Gap (t _g)		
Passenger Car	5.5 sec	bl 9-13, p 9-51	
Single-Unit Tuck	6.5 sec	bl 9-13, p 9-51	
Combination Truck	7.5 sec	bl 9-13, p 9-51	
Time gap adjustments			
Add'l lanes to cross (1 assumed)			
Passenger Car	0.5 sec	See Notes to	
Trucks	0.7 sec	bl 9-13, p 9-51	
Site data			
Opposing Lanes (adj'd for x-wide median)	0.0		
Time Gap based on site data			
<i>Design Vehicle Gap+Adj for Add'l Opposing Lanes</i>			
Passenger Car	5.5 sec		
Single-Unit Tuck	6.5 sec		
Combination Truck	7.5 sec		
ISD to front along Major Road	ISD=1.47V _{major} t _g (ft)	Eq 9-1, p 9-37	
Passenger Car	calculated ISD=	242.6 ft	
	design ISD=	245 ft	
Single-Unit Tuck	calculated ISD=	286.7 ft	
	design ISD=	290 ft	
Combination Truck	calculated ISD=	330.8 ft	
	design ISD=	335 ft	

The differences between Case F and Cases B1, B2 & B3 are reduced time gaps and no time gap adjustment for any minor approach upgrade. §9.5.3, p 9-43

SIGHT DISTANCE SUMMARY

Sight Distance Type	Governing Case	Car	SU Truck	Combo Truck
Stopping				
Without effect of grade		200	N/A	N/A
With effect of grade on left		200	N/A	N/A
With effect of grade on right		200	N/A	N/A
Intersection				
To Right	B1	335	420	510
To Left	B2/B3	290	375	465
On Major Road	F	245	290	335

