

REV. 12016-07-20 FIX ADDRESS

SITE ADDRESS

5429 E. SOLANO DRIVE PARADISE VALLEY, ARIZONA

ASSESSORS PARCEL NUMBER

A.P.N. 172-47-063

LEGAL DESCRIPTION

LOT 18 AS SHOWN on THE PLAT OF STONE CANYON EAST RECORDED IN BOOK 81 OF MAPS, PAGE 34, MARICOPA COUNTY RECORDERS OFFICE.

SITE AREA

AREA = 44,542 SQ.FT. OR 1.0225 ACRES MORE OR LESS

BASIS OF BEARING

CENTERLINE OF EAST SOLANO DRIVE WHICH BEARS \$58°30'51"E AS SHOWN ON THE PLAT OF STONE CANYON EAST RECORDED IN BOOK 81 OF MAPS, PAGE 34, M.C.R.

BENCHMARK

BRASS CAP IN HANDHOLE LOCATED AT THE INTERSECTION OF MCDONALD DRIVE AND N. 56TH STREET SAID POINT ALSO BEING THE N.E. CORNER SECTION 17, T. 2N., R. 4E., G.&S.R.B.&M.;

ELEVATION = 1417.53 TOWN OF PARADISE VALLEY DATUM

T.B.M.: BRASS CAP FLUSH LOCATED AT A POINT OF TANGENCY ALONG E. SOLANO DRIVE CENTERLINE NORTH OF LOT 18 OF STONE CANYON EAST, SHOWN HEREON.

ELEVATION = 1468.84

FLOOD PLAIN

THE SUBJECT PROPERTY IS LOCATED WITHIN SHADED ZONE "X" DEFINED AS "AREAS OF 0.2% ANNUAL CHANCE FLOOD: AREAS OF 1% ANNUAL CHANCE FLOOD WITH AVERAGE DEPTHS OF LESS THAN 1 FOOT OR WITH DRAINAGE AREAS LESS THAN 1 SQUARE MILE; AND AREAS PROTECTED BY LEVES FROM 1% ANNUAL CHANCE FLOOD: AS SHOWN ON FIRM MAP NO. 04013C1765L, DATED OCTOBER 16, 2013.

ZONING

SUBJECT PROPERTY IS CURRENTLY ZONED HILLSIDE, AS SHOWN ON TOWN OF PARADISE VALLEY, AZ. ZONING MAP, REVISED DATE 4-24-2013.

SURVEYOR'S UTILITY NOTE

UNDERGROUND UTILITIES LOCATIONS SHOWN HEREON ARE BASED ON FIELD OBSERVATIONS AND AVAILABLE MAPS OBTAINED FROM UTILITY COMPANIES AND THE CITY OF SCOTTSDALE, AZ.. ACTUAL LOCATIONS MAY VARY FROM LOCATIONS SHOWN HEREON.

EASEMENTS

5' WIDE EASEMENT FOR ROADWAY AS SHOWN ON THE FINAL PLAT FOR STONE CANYON EAST AS RECORDED IN BOOK 81 OF MAPS PAGE 34, M.C.R.

TITLE NOTE

THIS SURVEY WAS PERFORMED WITHOUT THE BENEFIT OF A TITLE REPORT. EASEMENTS SHOWN HEREON ARE PER THE PLAT OF RECORD, ADDITIONAL EASEMENTS MAY EXIST.

<u>OWNER</u>

TONN INVESTMENTS, L.L.C. 4350 E. CAMELBACK RD. PHOENIX, AZ. 85018 TELE: 602-684-1000 CONTACT: SCOTT TONN EMAIL: STONN@TONNINV.COM

SURVEYOR

SITE CONSULTANTS, INC.

113 SOUTH ROCKFORD DRIVE TEMPE, ARIZONA 85281 TELE: 480-894-2820 CONTACT: GARY STOCKER, R.L.S.

CERTIFICATION:

THIS IS TO CERTIFY THAT THE TOPOGRAPHIC INFORMATION SHOWN HEREON IS TRUE TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND WAS SURVEYED AND DRAWN UNDER MY DIRECTION DURING THE MONTH OF AUGUST & SEPTEMBER 2015.

9-24-15

STOCKER K EXPIRES 6-30-2016

PROJECT NO.: 2080 SCALE: 1" = 20'DRAWN BY: MGO

CHECKED BY: GES DATE: 9-24-2015 DWG: 2080-V-TOPO

PRELIMINARY GRADING & DRAINAGE PLAN TONN RESIDENCE

5429 E SOLANO DR., PARADISE VALLEY, AZ 85253

 $\triangleright 0 \triangleleft$

LOT 19 - STONE CANYON EAST RECORDED IN BOOK 81 OF MAPS, PAGE 34, M.C.R., TOWN OF PARADISE VALLEY GENERAL NOTES

PRIOR TO THE FIRST INSPECTION OF STRUCTURES WITHIN 3 FEET OF A SETBACK LINE. THE PROPERTY PINS SHALL BE PLACED BY A REGISTERED CIVIL ENGINEER OR LAND SURVEYOR OF THE STATE OF ARIZONA, AND THE PROPERTY LINE(S) IDENTIFIED.

WHERE EXCAVATION IS TO OCCUR THE TOP 4" OF EXCAVATED NATIVE SOIL SHALL REMAIN ON THE SITE AND SHALL BE REUSED IN A MANNER THAT TAKES ADVANTAGE OF THE NATURAL SOIL SEED BANK IT CONTAINS. ALL WORK REQUIRED TO COMPLETE THE CONSTRUCTION COVERED BY THIS PLAN SHALL BE IN ACCORDANCE WITH THE MARICOPA ASSOCIATION OF GOVERNMENTS (M.A.G.) STANDARD SPECIFICATIONS AND DETAILS AND CURRENT SUPPLEMENTS THEREOF PER THE LOCAL MUNICIPALITY UNLESS SPECIFIED OTHERWISE IN THESE

PLANS OR ELSEWHERE IN THE CONTRACT DOCUMENTS. THE CONTRACTOR IS TO COMPLY WITH ALL LOCAL STATE, AND FEDERAL LAWS AND REGULATIONS APPLICABLE

TO THE CONSTRUCTION COVERED BY THIS PLAN. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING AND COMPLYING WITH ALL PERMITS REQUIRED TO COMPLETE ALL WORK COVERED BY THIS PLAN.

ALL EXTERIOR SITE LIGHTING SHALL COMPLY WITH THE APPLICABLE REQUIREMENTS FOR TYPE, LOCATION, HEIGHT, WATTAGE, AND LUMEN BASED UPON THE FIXTURES INSTALLED PURSUANT TO SECTION 1023 OF THE TOWN OF PARADISE VALLEY ZONING ORDINANCE FOR NON-HILLSIDE PROPERTIES. SECTION 2208 OF THE TOWN OF PARADISE VALLEY ZONING ORDINANCE FOR HILLSIDE PROPERTIES, OR AS SPECIFIED IN THE SPECIAL USE PERMIT FOR SPECIAL USE PERMIT PROPERTIES.

A DUST CONTROL PLAN AND PERMIT MEETING THE REQUIREMENTS OF RULE 310 OF THE MARICOPA COUNTY AIR POLLUTION CONTROL REGULATIONS, AS AMENDED, IS REQUIRED.

A SEPARATE RIGHT-OF-WAY PERMIT IS NECESSARY FOR ANY OFF-SITE CONSTRUCTION. AN APPROVED GRADING AND DRAINAGE PLAN SHALL BE ON THE JOB SITE AT ALL TIMES. DEVIATIONS FROM

THE PLAN MUST BE PRECEDED BY AN APPROVED PLAN REVISION. O. EAVE PROJECTIONS INTO REQUIRED SETBACKS ARE LIMITED TO A MAXIMUM OF 24" PURSUANT TO SECTION

1008 OF THE TOWN OF PARADISE VALLEY ZONING ORDINANCES. . ALL STRUCTURES AND LANDSCAPING WITHIN THE SIGHT VISIBILITY TRIANGLE SHALL HAVE A 2 FOOT MAXIMUM

12. ALL NEW AND EXISTING ELECTRICAL SERVICE LINES SHALL BE BURIED PER THE TOWN OF PARADISE VALLEY

13. IT SHALL BE THE RESPONSIBILITY OF THE PERMITTEE TO ARRANGE FOR THE RELOCATION AND RELOCATION COSTS OF ALL UTILITIES, AND TO SUBMIT A UTILITY RELOCATION SCHEDULE PRIOR TO THE ISSUANCE OF AN

14. EXISTING AND/OR NEW UTILITY CABINETS AND PEDESTALS SHALL BE LOCATED A MINIMUM OF 4'BEHIND ULTIMATE BACK OF CURB LOCATION. 5. POOL, SPA, BARBECUE AND ANY PROPOSED STRUCTURES OVER 8"ABOVE GRADE REQUIRE SEPARATE PERMIT

6. POOLS SHALL BE CONSTRUCTED BY SEPARATE PERMIT AND SECURED FROM UNWANTED ACCESS PER TOWN

CODE, ARTICLE 5-2.

7. ALL FILL MATERIAL UNDER SLABS AND WALKS SHALL BE COMPACTED TO NOT LESS THAN 95%. 18. SETBACK CERTIFICATION IS REQUIRED AND SHALL BE PROVIDED TO TOWN INSPECTOR PRIOR TO STEM WALL

19. FOR BUILDING PADS THAT HAVE 1'OR MORE OF FILL MATERIAL, SOILS COMPACTION TEST RESULTS ARE

REQUIRED AND SHALL BE PROVIDED TO TOWN INSPECTOR PRIOR TO PRE-SLAB INSPECTION. 20. FINISHED FLOOR ELEVATION CERTIFICATION IS REQUIRED AND SHALL BE PROVIDED TO TOWN INSPECTOR PRIOR

TO FRAMING INSPECTION. 21. MAIL BOXES SHALL COMPLY WITH THE TOWN OF PARADISE VALLEY STANDARDS FOR MAIL BOXES IN THE RIGHTOF-WAY FOR HEIGHT, WIDTH AND BREAK AWAY FEATURES.

22. ALL PATIOS, WALKS, AND DRIVES TO SLOPE AWAY FROM BUILDING AND GARAGES AT A MINIMUM SLOPE OF

1/4" PER FOOT UNLESS SPECIFIED OTHERWISE. TRENCH BEDDING AND SHADING SHALL BE FREE OF ROCKS AND DEBRIS.

ENGINEERING CONSTRUCTION PERMIT.

24. THE TOWN ONLY APPROVES THE SCOPE OF WORK AND NOT THE ENGINEERING DESIGN. ANY CONSTRUCTION QUANTITIES SHOWN ARE NOT VERIFIED BY THE TOWN.

25. THE APPROVAL OF THE PLANS IS VALID FOR 180 DAYS. IF A PERMIT FOR CONSTRUCTION HAS NOT BEEN

ISSUED WITHIN 180 DAYS, THE PERMIT MUST BE RENEWED. 26. A TOWN INSPECTOR WILL INSPECT ALL WORK WITHIN THE TOWN'S RIGHTS-OF-WAY. NOTIFY TOWN INSPECTION

SERVICES TO SCHEDULE A PRECONSTRUCTION MEETING PRIOR TO STARTING CONSTRUCTION.

WHENEVER EXCAVATION IS NECESSARY, CALL ARIZONA811 BY DIALING 811 or 602-263-1100, TWO (2) WORKING DAYS BEFORE EXCAVATION BEGINS.

28. EXCAVATIONS SHALL COMPLY WITH REQUIREMENTS OF OSHA EXCAVATION STANDARDS (29 CFR, PART 1926, SUBPART P). UNDER NO CIRCUMSTANCES WILL THE CONTRACTORS BE ALLOWED TO WORK IN A TRENCH LOCATED WITHIN THE TOWN'S RIGHT-OF-WAY WITHOUT PROPER SHORING OR EXCAVATION METHODS.

9. PERMIT HOLDER SHALL POST A 6 SQUARE FOOT (2'X3') IDENTIFICATION SIGN, MADE OF DURABLE MATERIAL, IN THE FRONT YARD OF SUBJECT PROPERTY AND NOT IN THE TOWN'S RIGHT-OF-WAY. THE SIGN MAY NOT EXCEED A MAXIMUM OF 6 FEET IN HEIGHT FROM GRADE TO TOP OF THE SIGN. THE SIGN MUST INCLUDE THE PERMITTEE OR COMPANY NAME, PHONE NUMBER. TYPE OF WORK, ADDRESS OF PROJECT AND TOWN CONTACT NUMBER, 480-348-3556.

WHEN DEEMED NECESSARY, A 6-FOOT HIGH CHAIN LINK FENCE MUST BE INSTALLED AROUND THE CONSTRUCTION AREA TO PREVENT ANY POTENTIAL SAFETY HAZARD FOR THE PUBLIC. THE FENCE SHALL BE SETBACK AT LEAST 10 FEET FROM ALL RIGHTS-OF-WAY AND HAVE A 50-FOOT STREET CORNER SITE TRIANGLE WHERE APPLICABLE

CLEAR ACCESS FOR NEIGHBORING PROPERTIES AND EMERGENCY VEHICLES MUST BE MAINTAINED AT ALL TIMES. CONSTRUCTION RELATED VEHICLES MUST BE LEGALLY PARKED ONLY ON ONE SIDE OF THE STREET OR JOB SITE PROPERTY ALL CONSTRUCTION DEBRIS AND EQUIPMENT MUST BE CONTAINED ON SITE AT ALL TIMES. CONTRACTOR AND

PROPERTY OWNER MUST MAINTAIN THE JOB SITE FREE OF LITTER AND UNSIGHTLY MATERIALS AT ALL TIMES. CONSTRUCTION MATERIALS ARE PROHIBITED IN THE TOWN'S RIGHT-OF-WAY. CONSTRUCTION ACTIVITIES ARE PERMITTED BETWEEN THE HOURS OF 7 AM AND 5 PM MONDAY THROUGH

FRIDAY. CONSTRUCTION ACTIVITIES MAY START ONE (1) HOUR EARLIER DURING THE SUMMER (MAY 1ST THROUGH SEPTEMBER 30TH).

34. THE USE AND OPERATION OF FUEL-FIRED GENERATORS IS PROHIBITED UNLESS DUE TO A HARDSHIP. TOWN APPROVAL SHALL BE REQUIRED.

35. THE CONTRACTOR AND PROPERTY OWNER SHALL BE LIABLE FOR ANY DAMAGE DONE TO ANY PUBLIC PROPERTY AS A RESULT OF ANY CONSTRUCTION OR CONSTRUCTION RELATED ACTIVITIES. NO CERTIFICATE OF OCCUPANCY WILL BE ISSUED UNTIL ALL AFFECTED RIGHTS-OF-WAY ARE CLEANED AND/OR REPAIRED TO THEIR ORIGINAL CONDITION AND UNTIL ANY AND ALL DAMAGES TO AFFECTED PROPERTIES ARE RESTORED TO ORIGINAL CONDITION.

36. A KEYED SWITCH SHALL BE REQUIRED ON ALL NEW AND EXISTING ELECTRIC ENTRY GATES. THE KEYED SWITCH SHALL BE INSTALLED IN A LOCATION THAT IS READILY VISIBLE AND ACCESSIBLE. KNOX BOX ORDER FORMS ARE AVAILABLE AT THE TOWN'S BUILDING SAFETY DEPARTMENT. PROPERTY OWNER, BUILDER, OR GENERAL CONTRACTOR WILL BE RESPONSIBLE FOR CONTROLLING DUST FROM

THE SITE AT ALL TIMES. ALL MEANS NECESSARY SHALL BE USED BY THE BUILDER OR GENERAL CONTRACTOR TO CONTROL THE EXISTENCE OF DUST CAUSED BY ANY EARTHWORK, SPRAY APPLICATION OF MATERIALS, OR OTHER DUST-CAUSING PRACTICES REQUIRED BY THE CONSTRUCTION PROCESS

38. APPROVAL OF THESE PLANS ARE FOR PERMIT PURPOSES ONLY AND SHALL NOT PREVENT THE TOWN FROM REQUIRING CORRECTION OF ERRORS IN THE PLANS WHERE SUCH ERRORS ARE SUBSEQUENTLY FOUND TO BE IN VIOLATION OF ANY LAW, ORDINANCE, HEALTH, SAFETY, OR OTHER DESIGN ISSUES.

ALL DRAINAGE PROTECTIVE DEVICES SUCH AS SWALES, INTERCEPTION DITCHES, PIPES PROTECTIVE BERMS, CONCRETE CHANNELS OR OTHER MEASURES DESIGNED TO PROTECT PROPOSED AND EXISTING IMPROVEMENTSFROM RUNOFF OR DAMAGE FROM STORM WATER, MUST BE CONSTRUCTED PRIOR TO THE CONSTRUCTION OF ANY IMPROVEMENTS.

TOWN OF PARADISE VALLEY GENERAL HILLSIDE NOTES

NO CERTIFICATE OF OCCUPANCY SHALL BE ISSUED UNTIL ALL HILLSIDE STIPULATIONS AND ALL TOWN CODE REQUIREMENTS ARE COMPLIED INCLUDING. BUT NOT LIMITED TO LANDSCAPING. GROUND RESTORATION. FIRE FLOW. FIRE SAFETY AND ALL ONSITE AND OFFSITE IMPROVEMENTS. . ALL OUTDOOR LIGHTING SHALL BE IN CONFORMANCE WITH ARTICLE XXII OF THE TOWN ZONING ORDINANCE.

. ALL EXCESS FILL MATERIAL SHALL BE REMOVED FROM THE SITE WITH NO NEW SPILL SLOPES.

. THE USE OF HYDRAULIC RAM HAMMERS, OR OTHER HEAVY EQUIPMENT USED TO CUT THROUGH ROCK, INCLUDING MACHINERY WITH AUDIBLE BACK UP WARNING DEVICES SHALL BE LIMITED TO USE BETWEEN THE HOURS OF 7:00AM OR SUNRISE, WHICHEVER IS LATER, AND 6:00PM OR SUNSET, WHICHEVER IS EARLIER, MONDAY THROUGH FRIDAY, WITH LIMITED WORK ON SATURDAY AND NO WORK ON SUNDAY OR LEGAL HOLIDAYS. RAM HAMMERS AND OTHER HEAVY EQUIPMENT CANNOT BE USED ON SATURDAYS WITHOUT A WAIVER FROM THE

CONSTRUCTION STAKING AND /OR FENCING SHALL BE PLACED AROUND THE CONSTRUCTION SITE SO AS TO PROTECT THE UNDISTURBED NATURAL AREA.

. ALL RETAINING WALLS SHALL NOT EXTEND MORE THAN 6 INCHES ABOVE THE MATERIAL THEY RETAIN (WITH EXCEPTION OF DRIVEWAY RETAINING WALLS IN ACCORDANCE WITH 2207.VI.6).

GRADE OR FINISHED GRADE WHICHEVER IS LOWER (TYPICAL). 37. REFER TO ARCHITECTURAL DRAWINGS FOR BUILDING LAYOUT, DIMENSIONS AND ELEVATIONS.

40. CONTRACTOR TO PROVIDE POSITIVE DRAINAGE AWAY FROM STRUCTURE - 5% MIN SLOPE FOR FIRST 10 FEET,

PARADISE VALLEY SUPPLEMENT TO MAG.

42. WATERPROOF ALL EXTERIOR WALLS 18" ABOVE FINISH GRADE—(BITUTHENE® 3000 HC MEMBRANE W/ GRACE PROTECTION 03 OR APPROVED EQUAL)

43. ALL PIPES AND FITTINGS SHALL BE INSTALLED PER MANUFACTURE'S SPECIFICATIONS AND DETAILS.

45. COORDINATE RIPRAP COLOR WITH LANDSCAPE PLANS AND DETAILS.

AND TRENCH DRAINS. 47. VERIFY AND COORDINATE WITH ARCHITECTURAL AND LANDSCAPE PLANS LOCATION AND HEIGHT OF ALL SITE

48. DISTURBED AREA: TOTAL ACRES = 0.5 ACRES < 1 ACRE; NPDES PERMIT IS NOT REQUIRED.

50. REFER TO GEOTECHNICAL REPORT FOR SPECIFIC RECOMMENDATIONS AND MAXIMUM ALLOWED FILL AND CUT

LEGEND

SECTION CORNER

BRASS CAP FLUSH

TAG OR AS NOTED

CALCULATED POINT

FOUND 1/2" REBAR &

SET 1/2" REBAR & TAG

1/4 QUARTER

OR AS NOTED

PROPERTY LINE

EASEMENT LINE

MONUMENT LINE

WATER METER

WATER VALVE

FIRE HYDRANT

SEWER CLEANOUT

SEWER MANHOLE

TRANSFORMER

CABLE TV RISER

CABLE TV BOX

GAS MARKER

CATV, PHONE

SEWER LINE

WATER LINE

TREE

----- EXISTING DISTURBED AREA

FLOW LINE

---1445 **--**

TRW: 25.33

(BW: 22.00)

ABBREVIATIONS

BACK OF CURB

BOTTOM OF WALL

CURVE LABEL

CENTERLINE

EXISTING

FLOW LINE

FOUND

INVERT

MEASURED

PAVEMENT

RECORDED

RIGHT OF WAY

RADIUS

EXISTING GRADE

FINISH GRADE

GUTTER, GAS

ESMT EASEMENT

BUILDING SETBACK LINE

CONCRETE, CALCULATED

TOWN OF PARADISE VALLEY

FINISH FLOOR ELEVATION

MARICOPA COUNTY RECORDER

PUBLIC UTILITY EASEMENT

TANGENT, TELEPHONE

WEST. WATERLINE

TOP OF PARAPET

TOP OF CURB

TOP OF GRATE

TOP OF FOOTING

TOP OF RAILING

TOP OF WALL

WATER METER

TOP OF RETAINING WALL

MARICOPA ASSOCIATION OF GOVERNMENTS

DRAINAGE EASEMENT

TF: 21.00

C11

EX,

EXIST.

ELECTRIC LINE

COMMUNICATIONS LINE

EXIST. SPOT ELEVATION

PROPOSED DISTURBED AREA

DRAINAGE FLOW ARROW

PROPOSED CONTOUR

FINISH GRADE

CATCH BASIN

RETAINING WALL

STORM DRAIN PIPE

TOP OF FOOTING

PROPOSED SPOT ELEVATION

TOP OF RAILING/NON-RET. WALL

FINISH GRADE AT BOTTOM OF WALL

TOP OF RETAINING WALL

HISTORIC NATURAL GRADES

PER FCDMC AERIAL TOPOGRAPHY

RETAINING AGAINST THE BUILDING

FIBER OPTIC LINE

MAILBOX

IRRIGATION CONTROL BOX

IRRIGATION CONTROL VALVE

GAS METER

SIGN

LOCATED IN A PORTION OF THE NW 1/4 OF THE SE 1/4 NE 1/4 OF SECTION 17, T.2N, R.4E OF THE

GILA & SALT RIVER BASE AND MERIDIAN, MARICOPA COUNTY, ARIZONA

ENGINEERS NOTES 1. MARICOPA ASSOCIATION OF GOVERNMENTS (M.A.G.) UNIFORM STANDARD SPECIFICATIONS AND DETAILS FOR PUBLIC WORKS CONSTRUCTION (LATEST EDITION INCLUDING LATEST REVISION AND CURRENT SUPPLEMENTS THEREOF PER THE LOCAL TOWN OR CITY) ARE INCORPORATED INTO THIS PLAN IN THEIR ENTIRETY

2. ALL WORK REQUIRED TO COMPLETE THE CONSTRUCTION COVERED BY THIS PLAN SHALL BE IN ACCORDANCE WITH THE M.A.G. STANDARD SPECIFICATIONS AND DETAILS AND CURRENT SUPPLEMENTS THEREOF PER THE LOCAL CITY OR TOWN UNLESS SPECIFIED OTHERWISE IN THESE PLANS OR ELSEWHERE IN THE CONTRACT DOCUMENTS. CONTRACTORS SHALL FAMILIARIZE THEMSELVES WITH ALL REQUIRED STANDARD SPECIFICATIONS, DETAILS AND SUPPLEMENTS PRIOR TO BIDDING THE WORK FOR THE CONSTRUCTION COVERED BY THIS PLAN.

GRADING SHALL BE IN CONFORMANCE WITH 2012 IBC SEC. 1803 AND APPENDIX J.

4. 5% MINIMUM SLOPE AWAY FROM BUILDING FOR A MINIMUM 10', U.N.O. 5. ALL CONSTRUCTION SHALL CONFORM TO THE LATEST MARICOPA ASSOCIATION OF GOVERNMENTS (M.A.G.)

SPECIFICATIONS AND STANDARD DETAILS. 6. A DUST CONTROL PLAN MEETING THE REQUIREMENTS OF RULE 310 OF THE MARICOPA COUNTY AIR POLLUTION CONTROL REGULATIONS, AS AMENDED, IS REQUIRED.

A SEPARATE PERMIT IS NECESSARY FOR ANY OFFSITE CONSTRUCTION.

8. AN APPROVED GRADING AND DRAINAGE PLAN SHALL BE ON THE JOB SITE AT ALL TIMES. DEVIATIONS FROM THE PLAN MUST BE PRECEDED BY AN APPROVED PLAN REVISION. ALL DRAINAGE PROTECTIVE DEVICES SUCH AS SWALES, INTERCEPTOR DITCHES, PIPES, PROTECTIVE BERMS,

BARRIER WALLS, CONCRETE CHANNELS OR OTHER MEASURES DESIGNED TO PROTECT ADJACENT BUILDINGS OR PROPERTY FROM STORM RUNOFF MUST BE COMPLETED PRIOR TO BUILDING CONSTRUCTION. 10. ALL STRUCTURES AND LANDSCAPING WITHIN THE SIGHT VISIBILITY TRIANGLE SHALL HAVE A 2 FOOT MAXIMUM

11. ALL PATIOS, WALKS, AND DRIVES TO SLOPE AWAY FROM BUILDING AND GARAGES AT A MINIMUM SLOPE OF 1/4" PER FOOT UNLESS SPECIFIED OTHERWISE. ALL LAWN AREAS ADJOINING WALKS OR SLABS WILL BE GRADED TO 2"

BELOW THE TOP OF SLAB. TYPICAL FINISHED GRADE AROUND PERIMETER OF BUILDING IS MINUS 6" BELOW FINISHED FLOOR UNLESS SPECIFIED OTHERWISE. ALL MATERIAL TO BE UNDER SLABS AND WALKS SHALL BE COMPACTED TO NOT LESS THAN 95% PER ASTM D698.

13. THE QUANTITIES AND SITE CONDITIONS DEPICTED IN THESE PLANS ARE FOR INFORMATIONAL PURPOSES ONLY AND ARE SUBJECT TO ERROR AND OMISSION. CONTRACTORS SHALL SATISFY THEMSELVES AS TO ACTUAL QUANTITIES AND SITE CONDITIONS PRIOR TO BIDDING THE WORK FOR THE CONSTRUCTION COVERED BY THIS PLAN. 14. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING AND COMPLYING WITH ALL PERMITS REQUIRED TO COMPLETE

ALL WORK COVERED BY THIS PLAN. 15. THE CONTRACTOR IS RESPONSIBLE FOR ALL METHODS, SEQUENCING, AND SAFETY CONCERNS ASSOCIATED WITH THIS PROJECT DURING CONSTRUCTION, UNLESS SPECIFICALLY ADDRESSED OTHERWISE IN THIS PLAN OR

16. A REASONABLE EFFORT HAS BEEN MADE TO SHOW THE LOCATIONS OF EXISTING UNDERGROUND FACILITIES AND UTILITIES IN THE CONSTRUCTION AREA. THE CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE TO UTILITIES AND/OR FACILITIES CAUSED DURING THEIR CONSTRUCTION OPERATIONS. THE CONTRACTOR SHALL CALL 48 HOURS IN ADVANCE FOR BLUE STAKE (1-800-STAKE-IT) PRIOR TO ANY EXCAVATION.

17. THE CONTRACTOR IS RESPONSIBLE FOR ALL COORDINATION OF CONSTRUCTION AFFECTING UTILITIES AND THE COORDINATION OF ANY NECESSARY UTILITY RELOCATION WORK.

18. ALL PAVING, GRADING, EXCAVATION, TRENCHING, PIPE BEDDING, CUT, FILL AND BACKFILL SHALL COMPLY WITH THE RECOMMENDATIONS SET FORTH IN THE SOILS (GEOTECHNICAL) REPORT FOR THIS PROJECT IN ADDITION TO THE REFERENCED REQUIRED SPECIFICATIONS AND DETAILS.

19. THE CONTRACTOR IS TO VERIFY THE LOCATION AND THE ELEVATIONS OF ALL EXISTING UTILITIES AT POINTS OF TIE-IN PRIOR TO COMMENCING ANY NEW CONSTRUCTION. SHOULD ANY LOCATION OR ELEVATION DIFFER FROM THAT SHOWN ON THESE PLANS, THE CONTRACTOR SHALL CONTACT THE OWNER'S AGENT.

20. CONTRACTOR TO VERIFY AND COORDINATE ALL DIMENSIONS AND SITE LAYOUT WITH ARCHITECTURE'S FINAL SITE PLAN AND FINAL BUILDING DIMENSIONS BEFORE STARTING WORK. REPORT DISCREPANCIES TO OWNER'S AGENT. 21. COORDINATION BETWEEN ALL PARTIES IS ESSENTIAL PART OF CONTRACT.

22. CONTRACTOR IS RESPONSIBLE FOR PROJECT AND SITE CONDITIONS, AND TO WORK WITH WEATHER CONDITIONS AS THE PROJECT SITE MAY BE LOCATED IN A FLOOD PRONE AREA AND SUBJECT TO FLOODING AND ITS HAZARDS. 23. THE CONTRACTOR IS TO VERIFY THE LOCATION, ELEVATION, CONDITION, AND PAVEMENT CROSS-SLOPE OF ALL EXISTING SURFACES AT POINTS OF TIE-IN AND MATCHING, PRIOR TO COMMENCEMENT OF GRADING, PAVING, CURB AND GUTTER, OR OTHER SURFACE CONSTRUCTION. SHOULD EXISTING LOCATIONS, ELEVATIONS, CONDITION, OR PAVEMENT CROSS-SLOPE DIFFER FROM THAT SHOWN ON THESE PLANS, RESULTING IN THE DESIGN INTENT REFLECTED ON THESE PLANS NOT ABLE TO BE CONSTRUCTED. THE CONTRACTOR SHALL NOTIFY THE OWNER'S AGENT IMMEDIATELY FOR DIRECTION ON HOW TO PROCEED PRIOR TO COMMENCEMENT OF CONSTRUCTION. THE

CONTRACTOR ACCEPTS RESPONSIBILITY FOR ALL COSTS ASSOCIATED WITH CORRECTIVE ACTION IF THESE PROCEDURES ARE NOT FOLLOWED. 24. CONTRACTOR IS RESPONSIBLE TO COORDINATE UTILITY CROSSINGS AT CULVERT CROSSINGS BEFORE STARTING WORK ON CULVERT. COORDINATE WITH OWNER REPRESENTATIVE. VERIFY UTILITY LINES AND/OR CONDUITS ARE IN PLACE BEFORE STARTING CULVERT WORK.

25. ALL ON-SITE UTILITIES PER OTHERS. 26. THIS PROJECT REQUIRES A REGULAR ONGOING MAINTENANCE PROGRAM FOR THE DESIGNED DRAINAGE SYSTEM(S) TO PRESERVE THE DESIGN INTEGRITY AND THE ABILITY TO PERFORM ITS OPERATIONAL INTENT. FAILURE TO PROVIDE MAINTENANCE WILL JEOPARDIZE THE DRAINAGE SYSTEM(S)' PERFORMANCE AND MAY LEAD TO IT'S

INABILITY TO PERFORM PROPERLY AND/OR CAUSE DAMAGE ELSEWHERE IN THE PROJECT. 27. IF A DISCREPANCY IS FOUND BETWEEN ENGINEER'S PLAN OR SURVEYOR'S STAKING AND THE ARCHITECTURAL PLAN. ENGINEER SHALL BE NOTIFIED IMMEDIATELY. FAILURE TO NOTIFY ENGINEER SHALL NEGATE ENGINEER'S

28. ALL DISTURBED AREAS ARE TO BE ROPED AND ROPING MUST MATCH PLAN. 29. VEGETATION OUTSIDE OF CONSTRUCTION AREA TO REMAIN.

30. AREAS OUTSIDE THE WALL AND CUT AND FILL SLOPES SHALL BE REVEGETATED WITH SIMILAR PLANT TYPES AND DENSITIES FOUND ON THE SITE. REVEGETATION SHALL BE COMPLETED PRIOR TO OCCUPANCY AND THE ISSUANCE OF A CERTIFICATE OF OCCUPANCY.

31. MECHANICAL EQUIPMENT SHALL BE SCREENED TO A MINIMUM OF ONE FOOT ABOVE TOP OF EQUIPMENT. 32. ANY FUTURE IMPROVEMENTS SHOWN HEREON SHALL REQUIRE A SEPARATE PERMIT.

33. ANY POINTS OF DRAINAGE CONCENTRATION SHOULD BE PROTECTED AGAINST EROSION WITH NATIVE STONE. 34. THIS PLAN IS DESIGNED TO SHOW SITE GRADING AND DRAINAGE CONTRACTOR SHALL USE THE ARCHITECTURAL SITE PLAN TO DETERMINE FINAL HOUSE, WALL, STEP, ETC., LOCATIONS AND ELEVATIONS.

35. ALL DRAINAGE FACILITIES TO BE MAINTAINED BY HOMEOWNER. 36. SEE ARCHITECTURAL AND STRUCTURAL PLANS FOR SITE AND RETAINING WALLS LAYOUT, DIMENSIONS, AND

DETAILS. TOP OF FOOTING ELEVATIONS SHOWN IN PLAN ARE APPROXIMATE ONLY. ACTUAL TOP OF FOOTINGS TO BE DETERMINED AT TIME OF CONSTRUCTION AND TO BE A MINIMUM OF SIX INCHES BELOW EXISTING NATURAL

38. REFER TO STRUCTURAL DRAWINGS, DETAILS AND CALCULATIONS FOR ALL PROPOSED RETAINING WALLS.

39. FOR CHANGE IN ELEVATION THAT ARE GREATER THAN 30", PROVIDE 36" HIGH GUARDRAILS FOR TOTAL OF 42" FALL PROTECTION BARRIER U.N.O.

41. ALL WATER AND SEWER LINES AND CONNECTIONS MUST BE INSTALLED PER IPC 2012, MAG AND TOWN OF

44. ABANDONMENT OF EXISTING AND INSTALLATION OF NEW SEPTIC SYSTEMS SHALL BE PERFORMED IN ACCORDANCE WITH THE MARICOPA COUNTY ENVIRONMENTAL SERVICES DEPARTMENT RULES AND STANDARDS, AND WILL REQUIRE

46. VERIFY AND COORDINATE WITH LANDSCAPE PLANS FINAL LOCATION AND GRATE TYPE OF SPECIFIED AREA DRAINS

49. REFER TO ARCHITECTURAL PLANS AND DETAILS FOR DEMOLITION AND REMOVAL OF ANY EXISTING BUILDING STRUCTURES, SITE WALLS, POOL AND PAVEMENT ETC.

DISTURBED AREA CALCULATIONS

TOTAL FLOOR AREA: 6.267 S.F. FLOOR AREA RATIO: 14.07% < 25% (TOTAL FLOOR AREA/AREA OF LOT) **BUILDING PAD SLOPE:** 12.5% 17 FT 136 FT **HORIZONTAL:** 20,213 S.F. (45.38%) ALLOWABLE NET DISTURBED AREA: EXISTING GROSS DISTURBED AREA: 18,846 S.F. LESS EXISTING BUILDING FOOTPRINT: 3,668 S.F.

PROPOSED GROSS DISTURBED AREA: 19,381 S.F. LESS TEMPORARY AREAS OF DISTURBANCE TO BE RESTORED AND REVEGETATED: 0 S.F.

LESS 25% CREDIT FOR NEW PAVERS RESURFACED D/W OVER 6" AND UNDER 18" OF NATURAL GRADE: 3,316 S.F.*0.25=829 S.F. LESS BUILDING FOOTPRINT AREA:

THAN NATURAL GRADE (5% MAX.): PROPOSED SLOPES STEEPER THAN NATURAL GRADE (AREA): EARTHWORK BASED ON HISTORIC VACANT SITE CONDITION: **VOLUME OF CUT:** 3,369 C.Y.

HILLSIDE ASSURANCE @ 35 TIMES GRADING PERMIT FEE: \$113,930.25 2. A NEW SINGLE FAMILY RESIDENCE IS PROPOSED FOR THIS SITE. 3. PROPOSED DEVELOPMENT DOES NOT IMPACT DRAINAGE CONDITIONS OF ALL QUANTITIES LISTED ON THESE PLANS ARE ESTIMATES ONLY. THE CONTRACTOR SHALL MAKE THEIR OWN DETERMINATION OF THE QUANTITIES AND BASE THEIR BIDS ON THEIR ESTIMATES.

CUT: 331 C.Y.

ALL QUANTITIES LISTED ON THESE PLANS ARE ESTIMATES ONLY, NO SHRINK OR SWELL IS ASSUMED. THE CONTRACTOR SHALL MAKE THEIR OWN DETERMINATION OF THE QUANTITIES

UTILITIES NOTES

HORIZONTAL AND VERTICAL LOCATIONS OF ALL EXISTING UTILITIES SHOWN ON THE PLAN ARE APPROXIMATE ONLY AND WILL BE FIELD VERIFIED BY CONTRACTOR PRIOR TO START OF

REQUIREMENTS OF THE TOWN OF PARADISE VALLEY AND IN ACCORDANCE WITH I.B.C. SECT. 904.2.2 AMD. AND I.F.C. SECT. 1003.2.1 AMD.

(FIRM) DATA

AREA OF LOT: 44,542 S.F. (1.0225 AC.) EXISTING NET DISTURBED AREA: 15,178 S.F. (34.1%)

PROPOSED NET DISTURBED AREA: 13.858 S.F. < 20.213 S.F. ALLOWED SLOPES STEEPER 2,227 S.F. (5%) 2,092 S.F. (4.7%)

VOLUME OF FILL: 8 C.Y. 3,377 C.Y. TOTAL CUT&FILL:

GRADING PERMIT FEE: \$3,255.15

EARTHWORK QUANTITIES (CURRENT CONDITION)

AND BASE THEIR BIDS ON THEIR ESTIMATES.

CONSTRUCTION WORK. CALL BLUE STAKE @ (602) 263-1100.

FIRE SPRINKLER SYSTEM FIRE SPRINKLER SYSTEM TO BE INSTALLED PER THE

FLOOD INSURANCE RATE MAP

COMMUNITY # 040049	PANEL # 1765 OF 4425	SUFFIX L	BASED FLOOD
MAP # 04013C	PANEL DATE 10/16/2013	ZONE X*	ELEVATION N/A

*AREAS DETERMINED TO BE OUTSIDE THE 0.2% ANNUAL CHANCE FLOODPLAIN;


ON-S	ON-SITE RETENTION FOR THE PRE VS. POST DEVELOPMENT RUNOFF FROM 100-YEAR, 2-HOUR STORM EVENT							
V=DxAx(Cp	V=DxAx(Cpost-Cpre)/12=(0.95-0.80) D-RAINFALL DEPTH=2.82" A-TRIBUTARY AREA, SF Cw-WEIGHTED RUNOFF COEFFICIENT							
DRAINAGE	AREA	RUNOFF COEFFICIENT	VOLUME REQUIRED	RETENTION TYPE	VOLUME PROVIDED			
AREA S.F	S.F.	Cw	C.F.		C.F.			
Α	5,206 *	0.15	184	28' LONG (36" DIA) UNDERGROUND STORM WATER STORAGE	197			
В	3,560 *	0.15	125	18' LONG (36" DIA) UNDERGROUND STORM WATER STORAGE	127			
С	3,187**	0.15	112	(1) – 9' DEEP (48" DIA) DRYWELL	113			
TOTAL			421		437			

*HARDSCAPE AND ROOF ONLY **DRIVEWAY ONLY

HISTORIC EARTHWORK QUANTITIES

CUT: 3975 C.Y.

ALL QUANTITIES LISTED ON THESE PLANS ARE ESTIMATES ONLY. NO SHRINK OR SWELL IS ASSUMED. THE CONTRACTOR SHALL MAKE THEIR OWN DETERMINATION OF THE QUANTITIES AND BASE THEIR BIDS ON THEIR ESTIMATES.

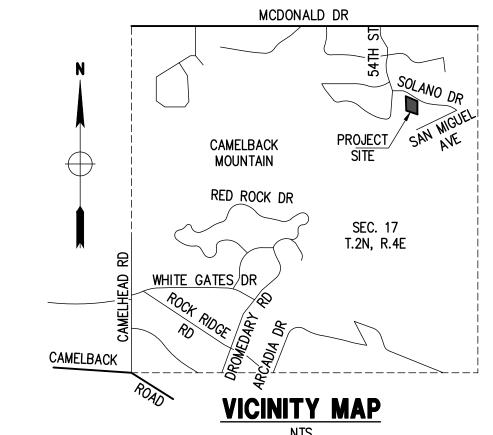

OWNER

TONN INVESTMENTS, L.L.C. 4350 E. CAMELBACK RD. PHOENIX, AZ, 85018 P: 602-684-1000 CONTACT: SCOTT TONN EMAIL: STONN@TONNINV.COM

SITE DATA ELEVATION = 1417.53 TOWN OF PARADISE VALLEY DATUM

172-47-063 ADDRESS: 5429 E SOLANO DRIVE T.B.M.: BRASS CAP FLUSH LOCATED AT A POINT OF TANGENCY ALONG E. PARADISE VALLEY, AZ 85253 ZONING: R-43 (HILLSIDE)

LOT AREA: 44,542 S.F. (1.0225 AC.)

LEGAL DESCRIPTION

SECTION 17, T. 2N., R. 4E., G.&S.R.B.&M.;

BASIS OF BEARINGS

DRAINAGE STATEMENT

4. HISTORIC DRAINAGE PATTERNS ARE PRESERVED.

GRADING SPECIFICATIONS

WORK IS UNDER CONSTRUCTION.

1. EXCAVATION AND GRADING OF THIS SITE IS CLASSIFIED AS

2. THE CONTRACTOR WILL RETAIN A SOILS ENGINEER DURING

"ENGINEERED GRADING" PER 2015 I.B.C. AND WILL BE PERFORMED

CONSTRUCTION TO INSPECT PROGRESS OF CONSTRUCTION. CONCERNING

PREPARATION OF GROUND TO RECEIVE FILLS, TESTING AND REQUIRED

COMPACTION STABILITY OF ALL FINISH SLOPES INCLUDING CUT SLOPES.

3. COMPACTION SHALL COMPLY WITH M.A.G. SECTION 601 AND PROVISIONS

UNDER THE SCOPE OF SPECIAL INSPECTION BY THE SOILS ENGINEER.

WRITING, TEN DAYS PRIOR TO START OF CONSTRUCTION ON THESE

6. THE USE OF HYDRAULIC RAM HAMMERS AND HEAVY EQUIPMENT SHALL

7. GEOTECHNICAL ENGINEER SHALL INSPECT AND ACCEPT THE INTEGRITY

MONDAY THROUGH SATURDAY WITH NO WORK ON SUNDAY.

OF THE EXISTING ROCK CUTS AND ANCHORS.

BE LIMITED TO USE BETWEEN THE HOURS OF 7:00AM AND 6:00PM

THE DEVELOPER SHALL NOTIFY THE ADJOINING PROPERTY OWNERS IN

WALLS PER SECTION 2903-B OF I.B.C. THE DEVELOPER WILL HAVE TO

PROVIDE MEANS OF PROTECTION OF ADJACENT PROPERTY WHILE THIS

4. CUT AND FILL SLOPES SHALL BE PER THE APPROVED GEOTECHNICAL

5. ANY RETAINING WALLS ADJACENT TO THE PROPERTY LINES WILL BE

AS SET FORTH IN THE APPROVED GEOTECHNICAL REPORTS.

AT ELEVATION OF 1466.70.

ADJOINING LOTS.

PER APPROVED PLANS.

ACCORDINGLY.

BENCHMARK

SHOWN HEREON.

PAGE 34. M.C.R.

ELEVATION = 1468.84

LOT 18 AS SHOWN ON THE PLAT OF STONE CANYON EAST RECORDED IN

BRASS CAP IN HANDHOLE LOCATED AT THE INTERSECTION OF MCDONALD

DRIVE AND N. 56TH STREET SAID POINT ALSO BEING THE N.E. CORNER

SOLANO DRIVE CENTERLINE NORTH OF LOT 18 OF STONE CANYON EAST,

CENTERLINE OF EAST SOLANO DRIVE WHICH BEARS \$58°30'51"E AS SHOWN

ON THE PLAT OF STONE CANYON EAST RECORDED IN BOOK 81 OF MAPS,

5. ONSITE RETENTION IS PROVIDED FOR THE PRE VS. POST RUNOFF.

6. THE MINIMUM FINISH FLOOR ELEVATIONS SHOWN ARE SAFE FROM

BOOK 81 OF MAPS, PAGE 34, MARICOPA COUNTY RECORDERS OFFICE.

ARCHITECT A-I-R, INC, 7610 E MCDONALD DR., SUITE K, SCOTTSDALE, AZ 85250

1. ULTIMATE STORM OUTFALL IS LOCATED AT THE NORTHWEST PROPERTY LINE LAND SURVEYOR

P: 480 329 1888

SITE CONSULTANTS, INC. 113 S ROCKFORD DR TEMPE, AZ 85281

P: 480 894 2820

INUNDATION DURING A 100-YEAR PEAK RUN-OFF EVENT IF CONSTRUCTED SHEET INDEX

SHEET C-1 - COVER SHEET SHEET C-2 - OVERALL SITE TOPOGRAPHY HISTORIC CONTOURS DISTURBANCE CALCULATIONS

SHEET C-3 - GRADING & DRAINAGE PLAN

UTILITIES

WATER: EPCOR WATER SANITARY SEWER: SEPTIC ELECTRIC: ARIZONA PUBLIC SERVICE TELEPHONE: CENTURY LINK, COX COMMUNICATIONS NATURAL GAS: SOUTHWEST GAS

CABLE TV: CENTURY LINK, COX COMMUNICATIONS


DATE TOWN ENGINEER TOWN OF PARADISE VALLEY


RESIDENC SOLANO 'ALLEY, AZ TON 5429 RADISE















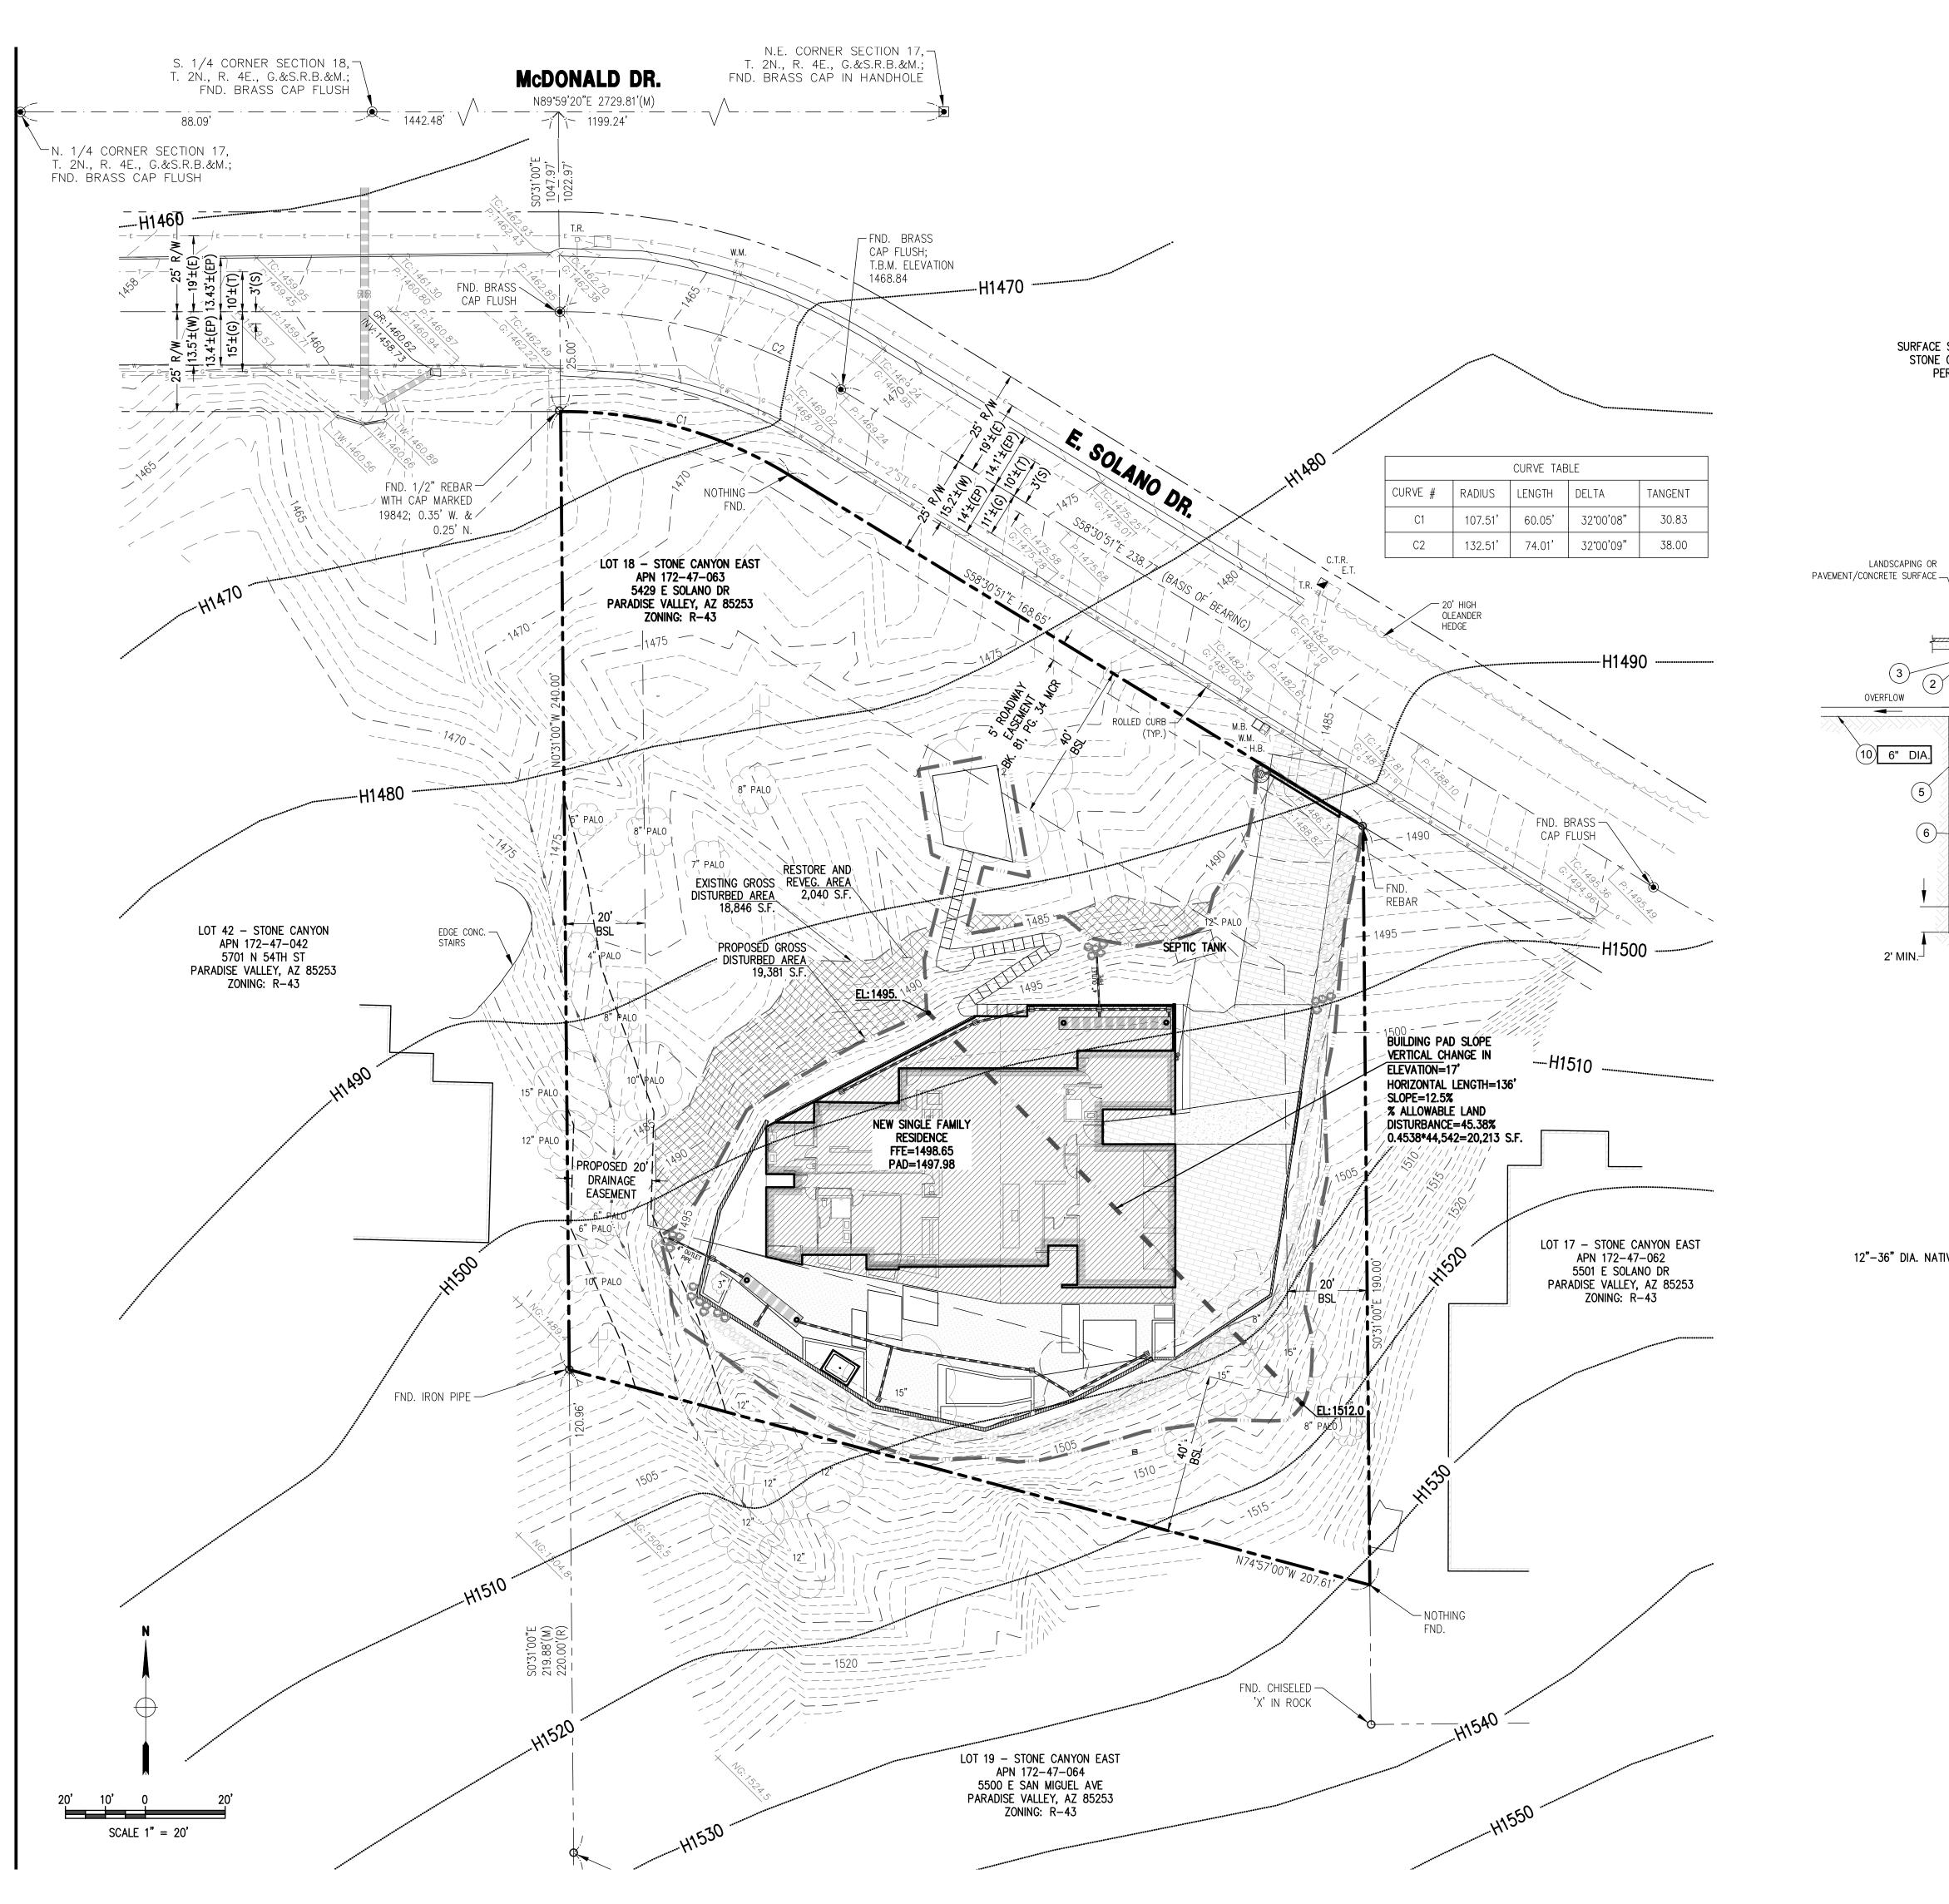









STORM DRAIN OUTLET AT WALL DETAIL

ISOMETRIC VIEW

(11)

C.M.U. WALL

DAYLIGHT

THROUGH-

SURFACE SELECT_ STONE OUTLET PER PLAN

OVERFLOW

_

5

6

2' MIN.[⊥]

DRYWELL

CHAMBER

LANDSCAPING OR CAST-IRON GRATE/LID - CAST-IRON RING AND GRATE/LID 1 48" DIA. (OXIDIZED FINISH) BOLTED IN TWO PLACES SECURED TO THE CONCRETE COLLAR WITH MORTAR. SEE DETAIL FOR GRATE DIAMETER SIZE. RIM/GRATE ELEVATION SET AS SHOWN ON 2 CONCRETE COLLAR - CAST IN PLACE OR PRECAST WITH 4000 PSI CONCRETE. I.D. OF CONCRETE COLLAR TO MATCH 4000 PSI CONCRETE. I.D. OF CONCRETE COLLAR TO MATCH O.D. OF PIPE. 12" WIDE CONCRETE BY 6" THICK. BACKFILL OF RISER/CONNECTOR PIPE - COMPACTED FILL IN

STORM DRAIN

WALL

DAYLIGHT

THROUGH_ WALL

PROFILE VIEW

INLET

LANDSCAPE AREAS OR 1-SACK SLURRY STABILIZATION FOR PAVEMENT/CONCRETE SURFACING.) INTAKE SCREEN - USE SLOTTED SCH-40 SCREEN PIPE. SEE

STORM DRAIN

-DRAIN PIPE PER PLAN

INLET

~ELBOW

DETAIL FOR DIAMETER SIZE. 48" IN LENGTH WITH VENTED OIL-ABSORBENT PILLOW - MINIMUM 1 GALLON CAPACITY.

HDPE DRYWELL LINER – 48" I.D. DUAL WALL PERFORATED $\left(\begin{array}{c}6\end{array}\right)$ HDPE. ADS N-12 OR EQUAL. PIPE TO BE ALIGNED IN THE CENTER OF THE EXCAVATION.

MININUM 6' DIA. EXCAVATION — EXCAVATE IN A MANNER TO

PROTECT DRAINAGE SOILS. (8) GRAVEL PACK - 3/8" TO 1-1/2" WASHED, CLEAN GRAVEL

PACK TO INCLUDE SURROUNDING CHAMBER. **GEOTEXTILE INFILTRATION BARRIER** – 4 OZ. NON-WOVEN


FABRIC WITH 2 INCHES OF GRAVEL COVER FOR SECURING

OVERALL (HISTOR DISTURBAN


OVERFLOW PIPE - USE PVC SCH-40 PIPE MATERIAL. SEE DETAIL FOR DIAMETER SIZE. (11) GEOTEXTILE FILTER FABRIC - 4 OZ. NON-WOVEN FABRIC.

INSTALL UNDER THE GRATE, BETWEEN THE GRAVEL PACK AND NATIVE SOIL/BACKFILL, AND AROUND PERFORATED PIPE IF LOCATED IN COMPACTED FILL. CONTRACTOR/OWNER TO REMOVE FABRIC ON GRATE ONLY AFTER ALL CONSTRUCTION

DRYWELL DETAIL N.T.S.

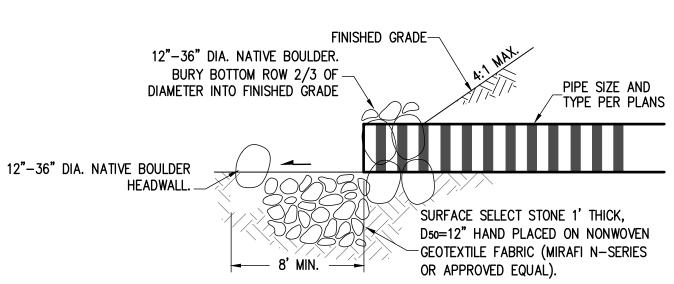


PIPE OUTLET DETAIL N.T.S.

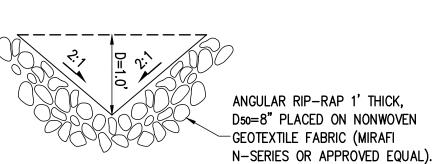

DRAINAGE SWALE DETAIL

PERCENT	SIZE	D ₅₀ CLASS, INCHES					
PASSING	SIZE	4	6	8	12		
100 TO 90	1.5 D50	6	8	12	18		
85 TO 70	1.3 D50	5	7	10	16		
50 TO 30	1.0 D50	4	6	8	12		
1 C TO C	7	7					

1	Contact Arizona 811 at least two full working days before you begin excavati
	ARIZONASII.
1	Call 811 or click Arizona811.com

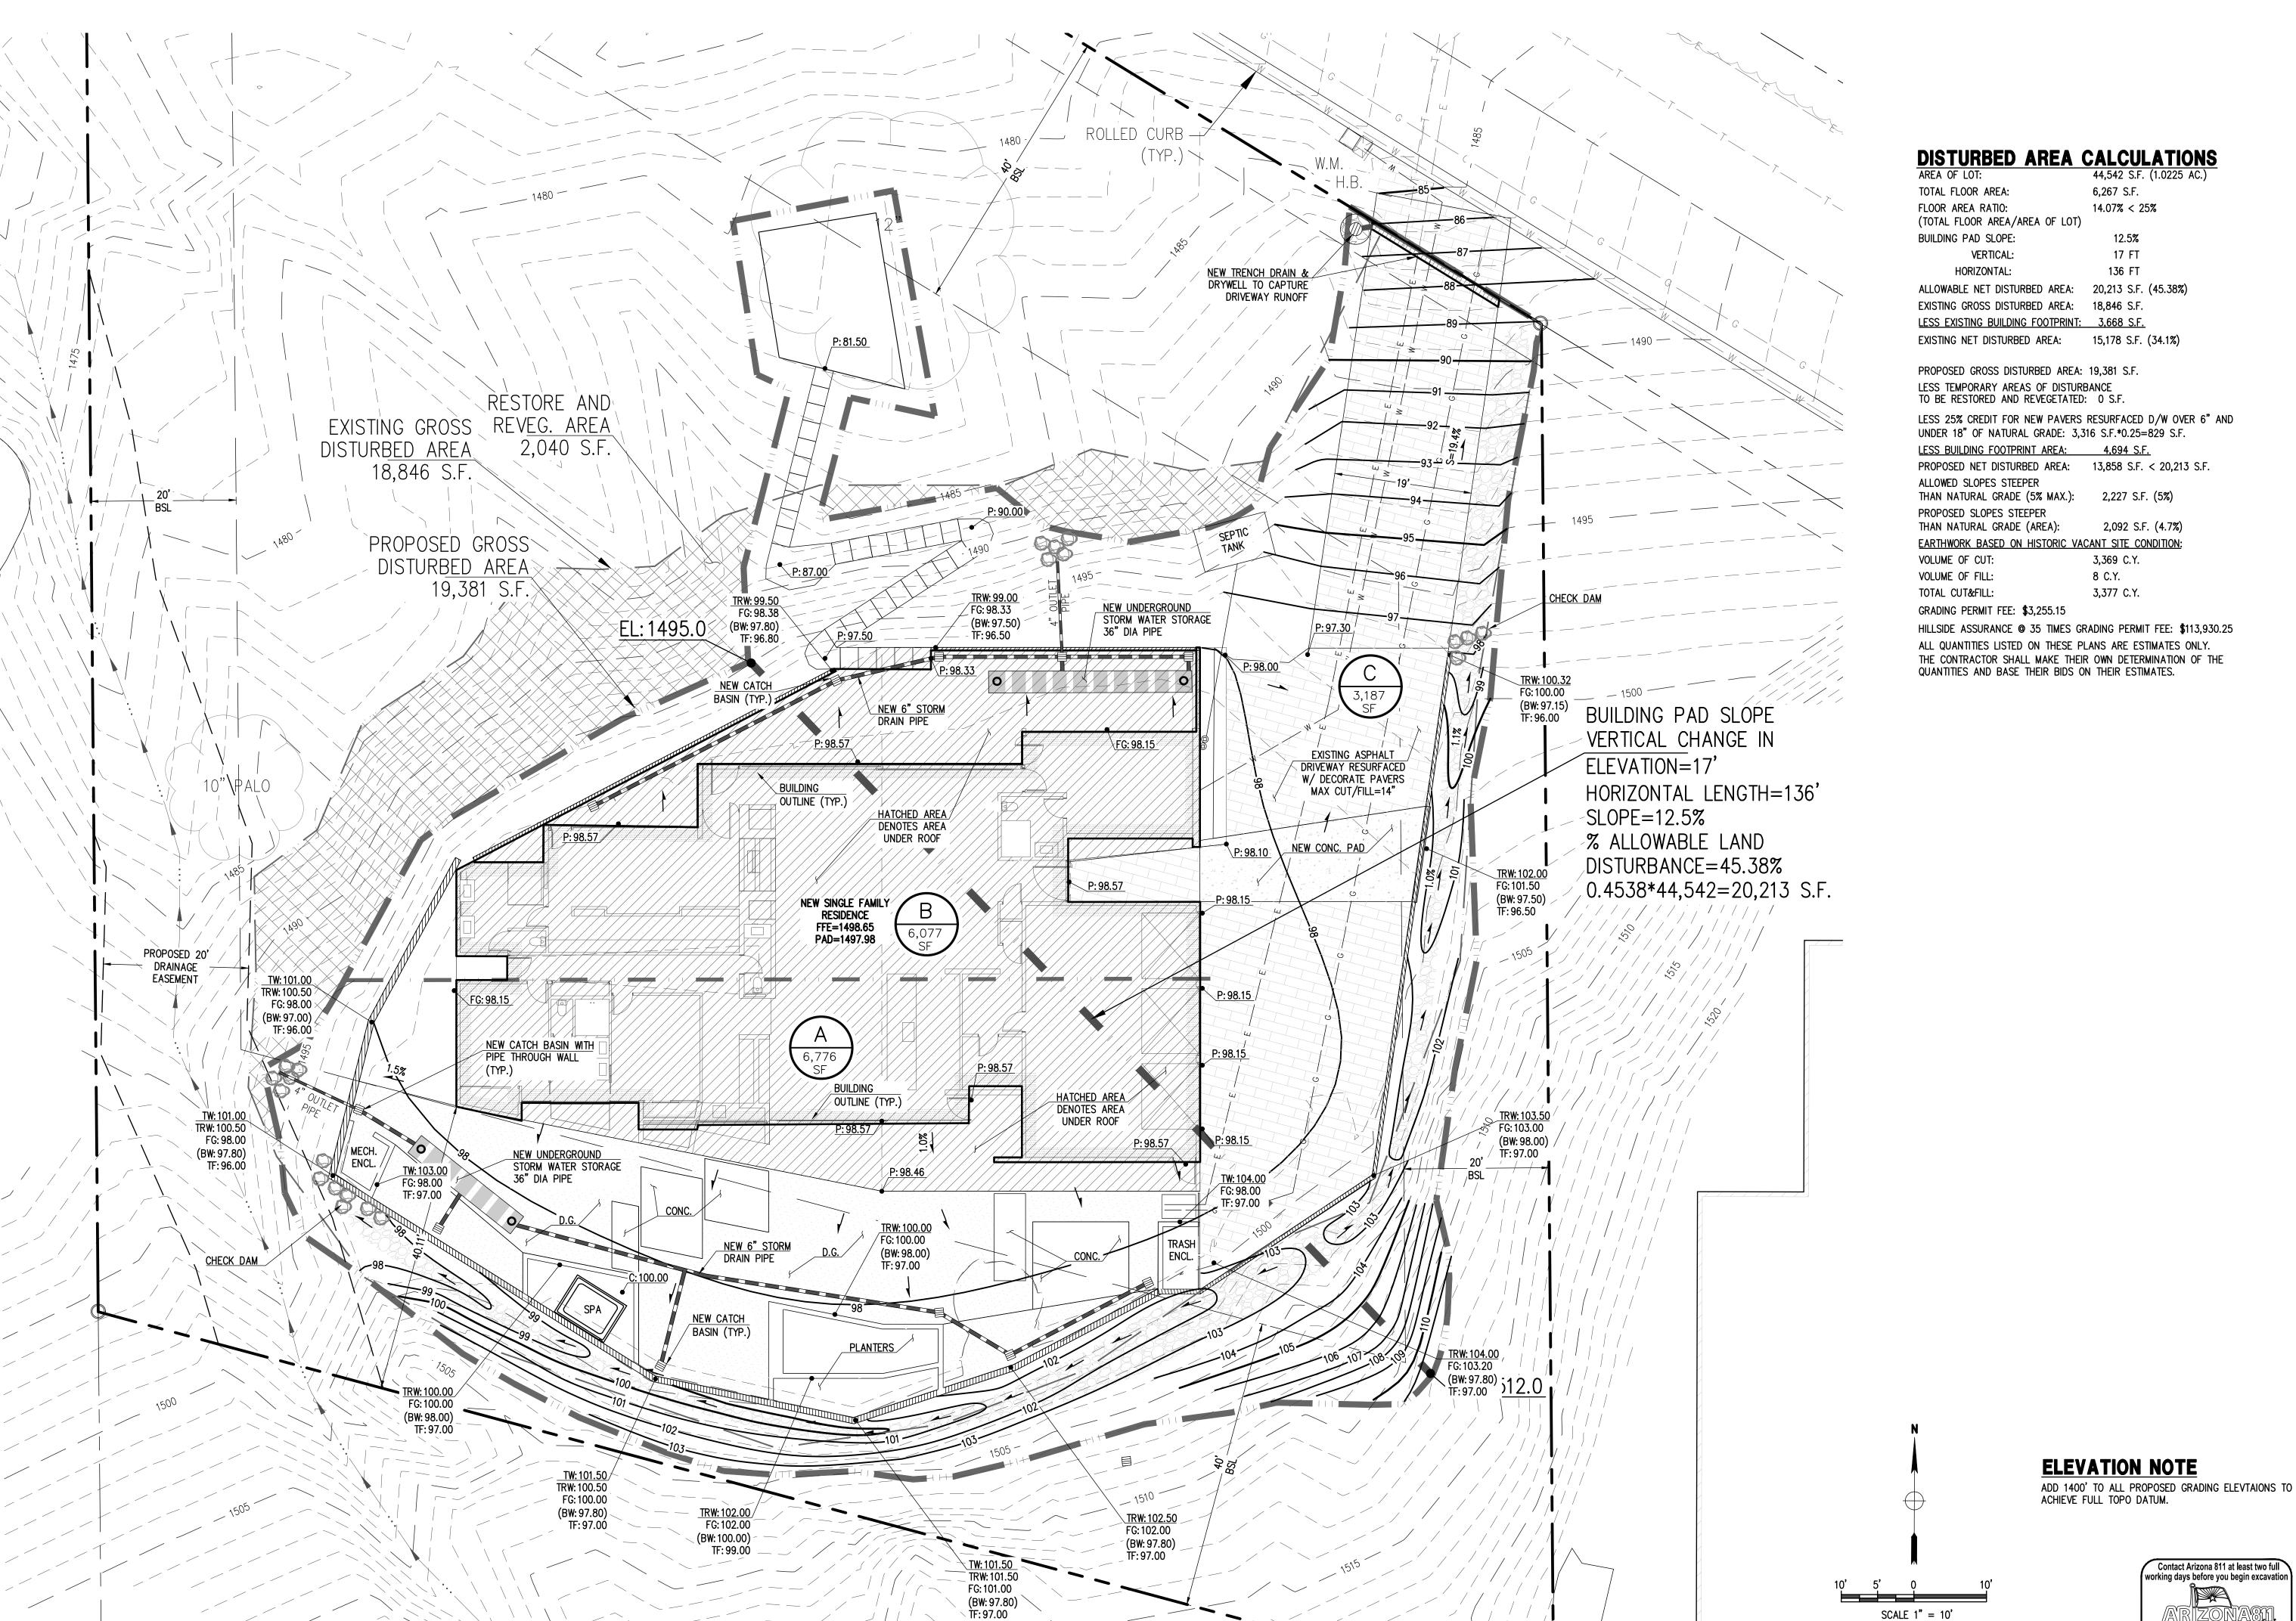

DISTURBED AREA CALCULATIONS
AREA OF LOT: 44,542 S.F. (1.0225 AC.)

6,267 S.F. 14.07% < 25%

(TOTAL FLOOR AREA/AREA OF LOT) 12.5% 17 FT

136 FT ALLOWABLE NET DISTURBED AREA: 20,213 S.F. (45.38%) EXISTING GROSS DISTURBED AREA: 18,846 S.F. LESS EXISTING BUILDING FOOTPRINT: 3,668 S.F. EXISTING NET DISTURBED AREA:

PROPOSED GROSS DISTURBED AREA: 19,381 S.F. LESS TEMPORARY AREAS OF DISTURBANCE

LESS 25% CREDIT FOR NEW PAVERS RESURFACED D/W OVER 6" AND UNDER 18" OF NATURAL GRADE: 3,316 S.F.*0.25=829 S.F.

PROPOSED NET DISTURBED AREA: 13,858 S.F. < 20,213 S.F.

THAN NATURAL GRADE (5% MAX.): 2,227 S.F. (5%)

2,092 S.F. (4.7%) EARTHWORK BASED ON HISTORIC VACANT SITE CONDITION: 3,369 C.Y.

8 C.Y. 3,377 C.Y.

GRADING PERMIT FEE: \$3,255.15

HILLSIDE ASSURANCE @ 35 TIMES GRADING PERMIT FEE: \$113,930.25 ALL QUANTITIES LISTED ON THESE PLANS ARE ESTIMATES ONLY. THE CONTRACTOR SHALL MAKE THEIR OWN DETERMINATION OF THE QUANTITIES AND BASE THEIR BIDS ON THEIR ESTIMATES.







Contact Arizona 811 at least two full

vorking days before you begin excavation

Call 811 or click Arizona811.com



GENERAL NOTES

- A ALL EXTERIOR MATERIAL PALETTE SHALL BE IN ACCORDANCE WITH SECTION 2207.II.D.
- B ALL EXTERIOR LIGHTING SHALL COMPLY WITH SECTION 2208.

KEYNOTES

- 01 ROOF 12" WIDE COPPER FLAT SEAM PANEL 02 EXISTING DRIVEWAY - TO BE REPLACED WITH DECORATIVE PAVERS
- 03 EXISTING POOL TO BE DEMOLISHED
- PROPOSED STAIRS
- **NEW HOT TUB EXISTING RETAINING WALL** - TO REMAIN
- MECHANICAL ENCLOSURE 4'-0" ABOVE **O8** PROPOSED PATIO - HIGHEST POINT = 1'-8"
- ABOVE GRADE

HEIGHT AS EXISTING RETAINING WALL (WHICH

- **09 PROPOSED MASONRY PLANTER** 2'-0" ABOVE 10 PROPOSED MASONRY PLANTER - SAME
- WILL REMAIN) 11 REFUSE ENCLOSURE - 5'-0" ABOVE GRADE
- 12 CONCRETE PAD EXPOSED AGGREGATE CONCRETE (< 38% LRV), TYP.

SITE DATA

AREA OF LOT AREA UNDER ROOF LIVABLE SF

ALLOWABLE NET DISTURBED AREA 45.38% (20,213 SF) PROPOSED GROSS DISTURBED AREA

19,381 SF LESS 25% CREDIT FOR PAVERS $3,316 \text{ SF} \times 0.25 = 829 \text{ SF}$ LESS BUILDING FOOTPRINT AREA 4,694 SF

44,542 SF (1.0225 AC)

6,267 SF

3,830 SF

14.07% < 25%

PROPOSED NET DISTURBED AREA 13,858 SF < 20,213 SF

PROJECT NARRATIVE

FLOOR AREA RATIO

NEW CONSTRUCTION OF A 3,830 SF HOUSE WITH A THREE CAR GARAGE. THE EXISTING HOUSE IS TO BE DEMOLISHED, AND THE EXISTING POOL WILL BE DEMOLISHED AND FILLED IN.

airspace@a-i-rinc.com 480.329.1888

A-I-R, Inc. retains all rights of ownership to this design including, but, not limited to the overall forms as well as arrangement and composition of design elements. Unauthorized use of this design and / or design documents will result in immediate legal actions pursuant to Section 102 of the Copyright Act, 17 U.S.O. as amended December, 1990. These documents are limited to the Original Site for which they were prepared and may not be reproduced without permission of A - I - R, Inc.. These documents are valid only if the Signature & Seal of the architect are present.

DATE: 11/26/18
SCALE: AS SHOWN

SITE PLAN

FORMAL REVIEW

SITE PLAN SCALE: 1/16" = 1'-0"



A-I-R, Inc. retains all rights of ownership to this design including, but, not limited to the overall forms as well as arrangement and composition of design elements. Unauthorized use of this design and / or design documents will result in immediate legal actions pursuant to Section 102 of the Copyright Act, 17 U.S.O. as amended December, 1990. These documents are limited to the Original Site for which they were prepared and may not be reproduced without permission of A - I - R, Inc... These documents are valid only if the Signature & Seal of the architect are present.

ONN RESIDENCE

EXPIRES 06/30/2020

DATE: 11/26/18
SCALE: AS SHOWN
DRAWN: DP/JP
JOB:

SITE SECTIONS

RMAL DEVIEW

FORMAL REVIEW

A-1.4



A-I-R, Inc. retains all rights of ownership to this design including, but, not limited to the overall forms as well as arrangement and composition of design elements. Unauthorized use of this design and / or design documents will result in immediate legal actions pursuant to Section 102 of the Copyright Act, 17 U.S.O. as amended December, 1990. These documents are limited to the Original Site for which they were prepared and may not be reproduced without permission of A - I - R, Inc.. These documents are valid only if the Signature & Seal of the architect are present.

TONN RESIDENCE

SCALE: AS SHOWN

DATE: 11/26/18


ELEVATIONS

FORMAL REVIEW




WALL SCONCE:

FATON

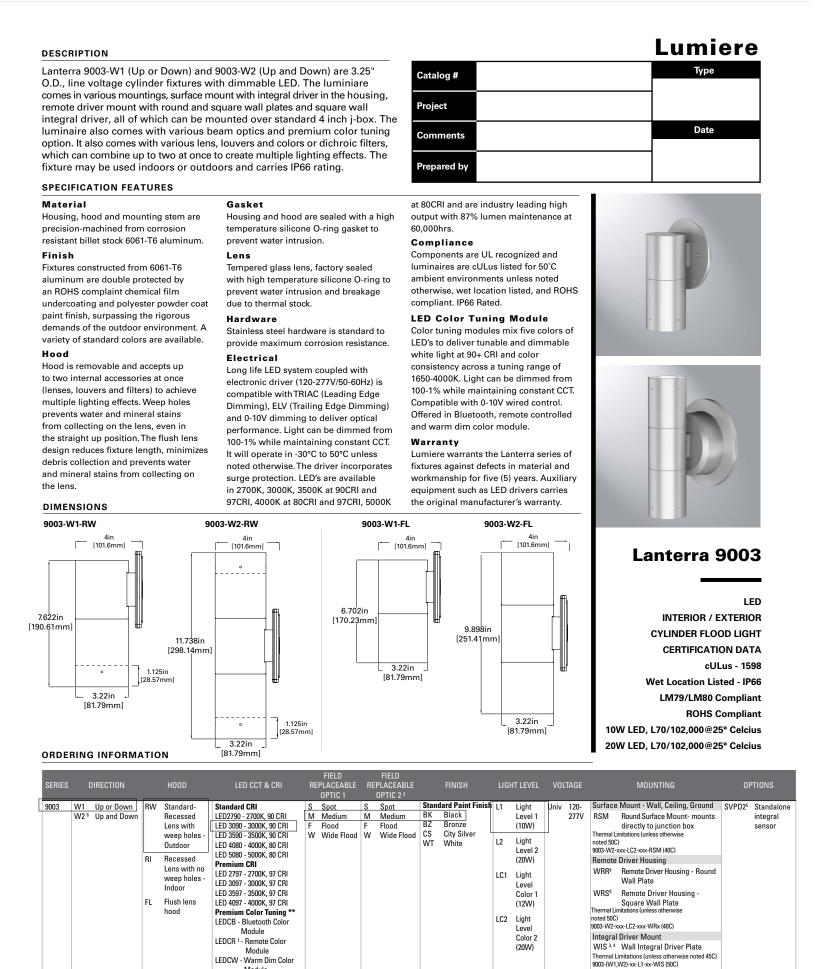

note separately
le for double head option (W2)
available in LC2
available in LC2
1. Only available for Single head, Up or down (W1) with RSM only
6. W2 doubles input wattage listed
7. Only available for LEDCR
8. Remote Driver distance up to 60'
** Available Q1, 2018

Specifications and dimensions subject to change without notice.

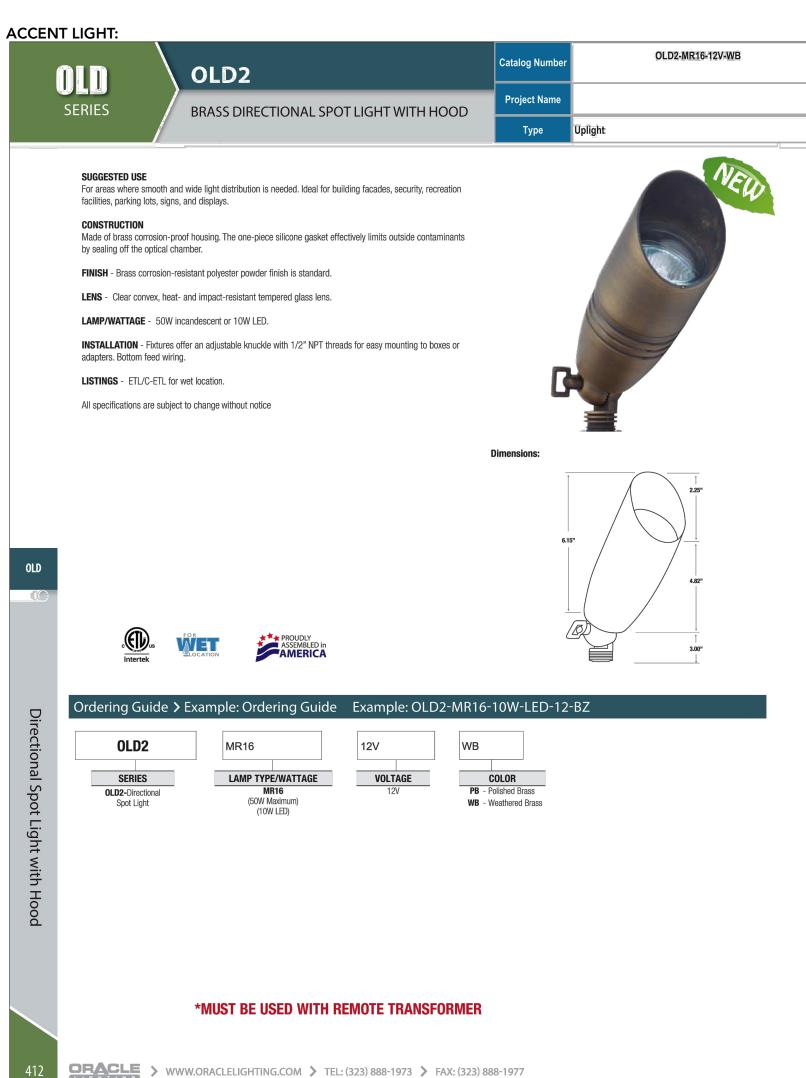

TAPE LIGHT:




LOW VOLTAGE LANDSCAPE LIGHTING

TYPE	QTY.	MANUFACTURER	DESCRIPTION	FINISH	WATTAGE	LUMENS	TEMPERATURE
□ Path	7	Oracle	In-Ground Drive-Over Well Light	Stainless Steel	10W LED	<250	3000K
Accent	11	Oracle	'Old2' Series Spot with Hood	Weathered Brass	10W LED	<150	2800K
□ Tape	2	Elite	LB200 Outdoor LED Tape -2'	N/A	6W LED	196	3000K

ALLOWABLE NUMBER OF UPLIGHTS = 20 MAX. (ONE LIGHT PER 1,000 ALLOWABLE DISTURBED AREA AT 20,152 S.F./1000 = 20 UPLIGHTS) ALL LIGHTING SHALL HAVE A MAXIMUM COLOR TEMPERATURE OF 3000K

LINE VOLTAGE BUILDING LIGHTING

TYPE	QTY.	MANUFACTURER	DESCRIPTION	FINISH	WATTAGE	LUMENS	TEMPERATU
→ Sconce	12	Lumiere	Lanterra 9003-W1, Dimmable LED Downlighting	Black	10W LED	590	3000K

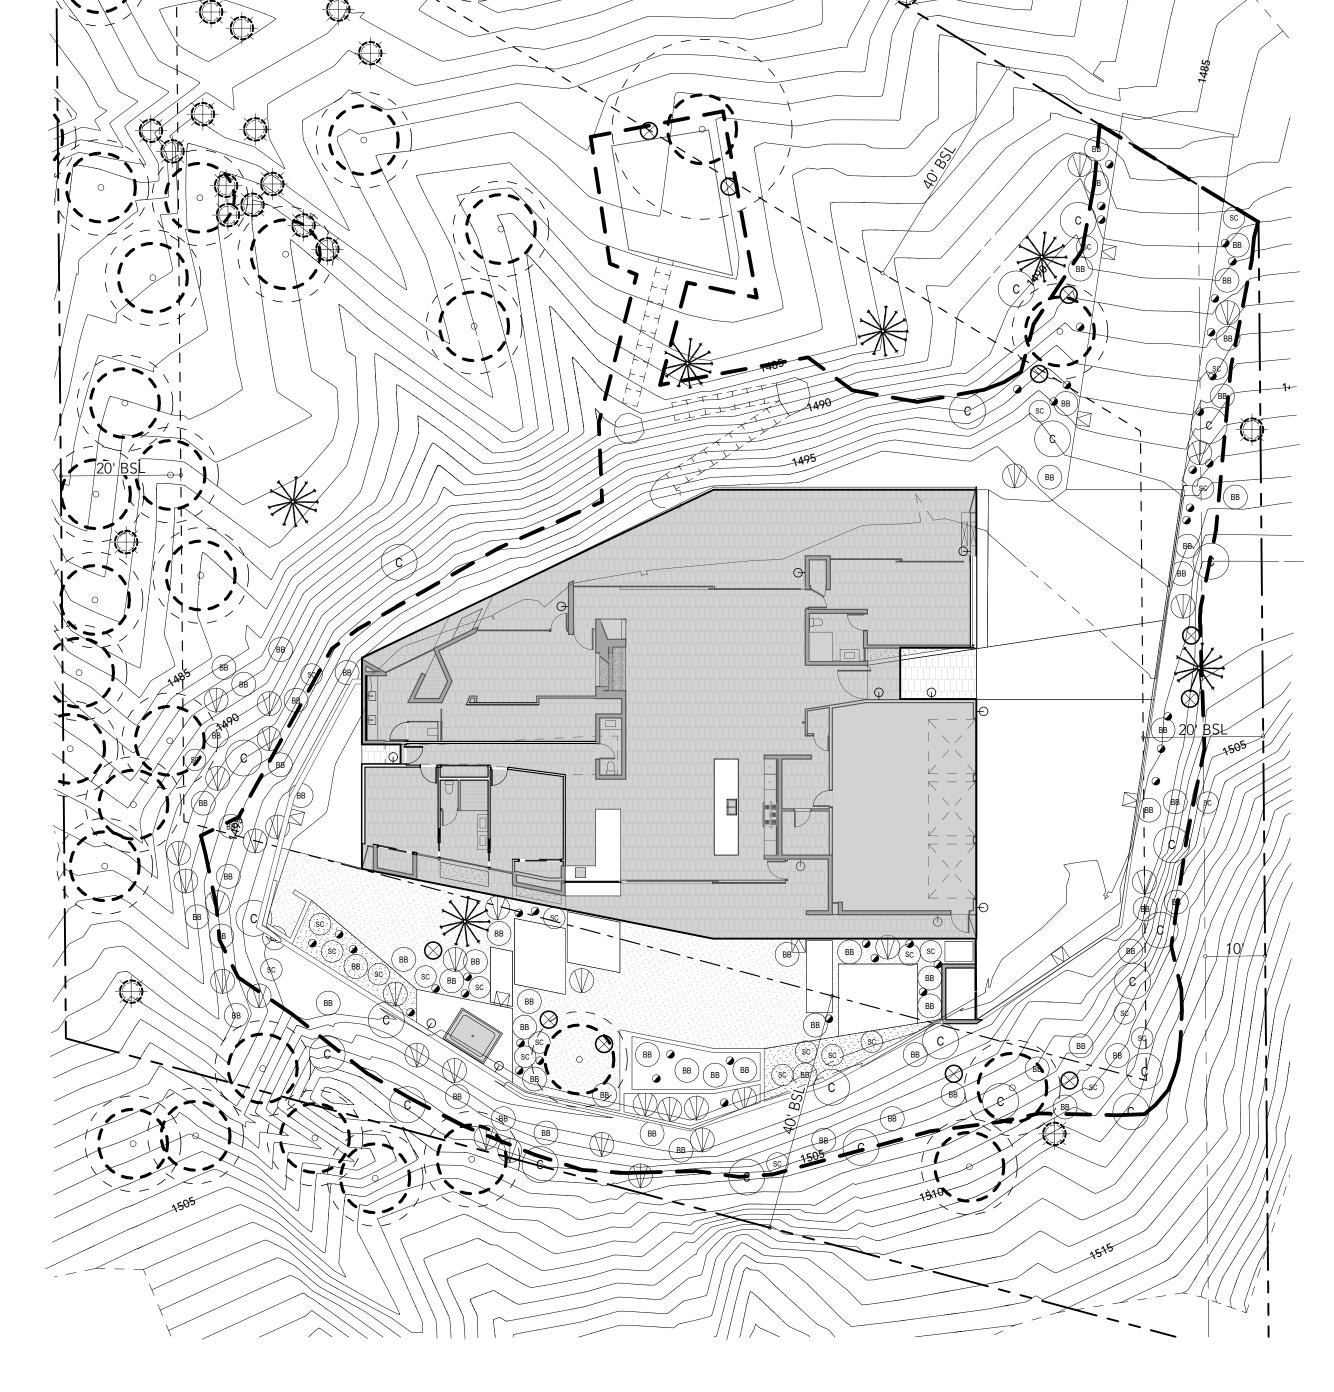

LANDSCAPE & BUILDING LIGHTING PLAN SCALE: 1/16" = 1'-0"


DISTURBED AREA



A-I-R, Inc. retains all rights of ownership to this design including, but, not limited to the overall forms as well as arrangement and composition of design elements. Unauthorized use of this design amended December, 1990. These documents are limited to the

Original Site for which they were prepared and may not be reproduced without permission of A - I - R, Inc.. These documents are valid only if the Signature & Seal of the architect are present.

SIDE RE

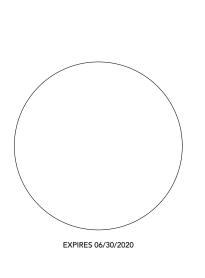

DATE: 11/26/18 SCALE: AS SHOWN DRAWN: DP/JP

LANDSCAPE & **BUILDING LIGHTING PLAN**

FORMAL REVIEW

PLANT LEGEND



EXISTING TREE TO REMAIN




EXISTING CACTUS TO REMAIN

BOTANICAL NAME	COMMON NAME	SIZE	QUAN
LARREA TRIDENTATA	CREOSOTE	15 GAL	23
ENCELIA FARINOSA	BRITTLEBUSH	5 GAL	66
SALVIA CLEVELANDII	CHAPARRAL SAGE	5 GAL	27
JUSTICIA CALIFORNICA	CHUPAROSA	5 GAL	24
FOUQUIERIA SPLENDENS	OCOTILLO	8 CANE MIN.	6
	LARREA TRIDENTATA ENCELIA FARINOSA SALVIA CLEVELANDII JUSTICIA CALIFORNICA	LARREA TRIDENTATA CREOSOTE ENCELIA FARINOSA BRITTLEBUSH SALVIA CLEVELANDII CHAPARRAL SAGE JUSTICIA CALIFORNICA CHUPAROSA	LARREA TRIDENTATA CREOSOTE 15 GAL ENCELIA FARINOSA BRITTLEBUSH 5 GAL SALVIA CLEVELANDII CHAPARRAL SAGE 5 GAL JUSTICIA CALIFORNICA CHUPAROSA 5 GAL

SIZE QUANTITY **GROUNDCOVER BOTANICAL NAME COMMON NAME** BAILEYA MULTIRADIATA **DESERT MARIGOLD** 1 GAL

ARCHITECTURE - INFRASTRUCTURE - RESEARCH airspace@a-i-rinc.com 480.329.1888

A-I-R, Inc. retains all rights of ownership to this design including, but, not limited to the overall forms as well as arrangement and composition of design elements. Unauthorized use of this design and / or design documents will result in immediate legal actions pursuant to Section 102 of the Copyright Act, 17 U.S.O. as amended December, 1990. These documents are limited to the Original Site for which they were prepared and may not be reproduced without permission of A - I - R, Inc.. These documents are valid only if the Signature & Seal of the architect are present.

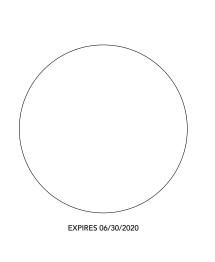

LANDSCAPE PLAN

FORMAL REVIEW

LANDSCAPE PLAN SCALE: 1/16" = 1'-0"