

ARIZONA TILE

PIETRA ITALIA SERIES



Pietra Italia Grey 24 x 24



Pietra Italia White

Pietra Italia White
2 x 2 Mosaic

Beige/White Stack



Pietra Italia Beige

Pietra Italia Beige
2 x 2 Mosaic

Black/Grey Stack



Pietra Italia Grey

Pietra Italia Grey
2 x 2 Mosaic



Pietra Italia Black

Pietra Italia Black
2 x 2 Mosaic

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.



MADE IN ITALY

PRODUCT TYPE

Rectified Through Body Porcelain

COLORS

Pietra Italia Beige
Pietra Italia Black
Pietra Italia Grey
Pietra Italia White

STOCKED SIZES

12 x 24 x 10mm
24 x 24 x 10mm
24 x 48 x 10mm
*12 x 24 x 10mm R11 Anti-Slip
*24 x 48 x 10mm R11 Anti-Slip (Beige Only)

Beige/White Stack
Black/Grey Stack
0.93 sq ft/sheet

2 x 2 x 10mm Mosaic

*Specifically designed for outdoor, exposed areas as well as wet applications, including shower floors. To be certified as R11 Anti-Slip, a tile must pass internationally-recognized testing.

To learn more, visit www.arizonatile.com

RECOMMENDED USES

Commercial
Residential
Interior Floor
**Exterior Floor (R11 Anti-Slip Recommended)

LRV	H/V/C
37.5	7.94R/7.0/1.6
5	2.36P/2.4/0.1
18	.676/5.6/0.02
81	9.45/49.1/0.4

Interior Wall
Exterior Cladding
Fireplaces
Showers
Steam Showers
Shower Floors (R11, 2 x 2 mosaic, and stacks only)
Pool & Spa (waterline)

STOCKED TRIM

3 x 12 x 10mm SBN

D.C.O.F. WET: ≥ 0.42

(Standard Finish)

P.E.I. RATING: 4

FROSTPROOF: Yes

**DCOF rating is a measurement of a tile's frictional resistance. The above result is for the Standard Finish. The testing for R11 Anti-Slip Finish is static, which is different from the Dynamic Coefficient of Friction (DCOF) test which is a dynamic test. These two tests measure for different and separate results, therefore the DCOF test is not the appropriate test for the R11 Anti-Slip finish. To be certified as R11 Anti-Slip Finish, a tile must pass internationally-recognized testing.

Pietra Italia is a rectified through body porcelain that emulates a limestone. It provides a clean, natural stone look to any environment.

It is available in three sizes. Because this material is a porcelain product, minimal maintenance is required. Piece to piece variation in shade or color are inherent in all fired clay products; therefore it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15", and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.

SIZE	SF/PIECE	PIECES/BOX	SF/BOX	BOXES/PALLET	SF/PALLET
12 x 24 x 10mm	1.9368	8	15.4944	32	495.8208
12 x 24 x 10mm R11 Anti-Slip Finish	1.9368	8	15.4944	32	495.8208
24 x 24 x 10mm	3.8736	4	15.4944	32	495.8208
24 x 48 x 10mm	7.7472	2	15.4944	36	557.7984
24 x 48 x 10mm R11 Anti-Slip Finish (Beige Only)	7.7472	2	15.4944	36	557.7984
Beige/White Stack Black/Grey Stack	0.93 sq ft/sheet	N/A	N/A	N/A	N/A
2 x 2 x 10mm Mosaic	0.9588	10 sheets	9.588	45	431.46

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Standard packaging quantities are noted above. Low variances may occur.

Please view actual material when making your selection, as the images on this page are only representative.

www.arizonatile.com

Directional Spot

DS1300BZ-LXC2

CPF: Complete Packaged Fixtures**PRODUCT DESCRIPTION****Fixture included**

- 3' - #18/2 Direct Bury Landscape Lighting Wire
- Hi-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- Low Voltage Transformer required (not included)
- Wire Connectors required (not included)
- C ETL listed and approved

LED lamp included

- LXC2-MR16-FL-27K
- 9-15 V AC/DC
- Constant Current Driver for long life
- FCC Certified
- C ETL Listed and Approved
- 40 Degree Flood
- 2700K
- 250 Lumens
- COB Technology
- 7 Year Warranty



DS1300BZ-LXC2



LXC2-MR16



Universal Shades

US2116WB



US2301WB



Intertek
3065607



UP2112WB

MATERIAL / FEATURES

- Heavy Duty Cast Brass
- Powder Coated Reflective White Under Shade
- Industrial Grade Hub Assembly includes
 - Rugged "O" Ring Seal for added moisture protection
 - Frosted Glass Lens
 - High Grade Cast Shatter Shield Cage
 - Protects against accidental injury
- Always straight design insures Shades are level on Posts
- Chemically Aged finish - Brass
- (WB) – Weathered Brass – US2116WB
- Universal Post (UP) and Lamp required (not included – see options)

ELECTRICAL

- 12 Volt Fixture
- 3' - #18/2 Direct Bury Landscape Lighting Wire
- Hi-temp ceramic socket w/nickel contacts, stainless steel springs, and Teflon jacketed wire leads
- T3 35 W Max G4 Base Lamp required (not included)
- Low Voltage Transformer Required (not included)
- Wire Connectors Required (not included)
- C ETL listed and approved
- POSTS:
 - UP2112WB - 12" Universal Post Weathered Brass
 - UP2115WB - 15" Universal Post Weathered Brass
 - UP2118WB - 18" Universal Post Weathered Brass

LED LAMP OPTIONS

- LV1-T3
- LV2-T3
- LV3-T3
- LX2-T3
- LX1-G4

DIMENSIONS

- US2116WB – 3.5" W x 3.5" H

LV1-T3



LV2-T3



LV3-T3



LX2-T3




LX1-G4




SL25-LED

Integrated Surface Mount Step Light

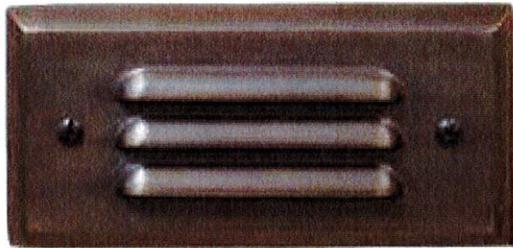

Mounts directly onto desired surface

(Back View)

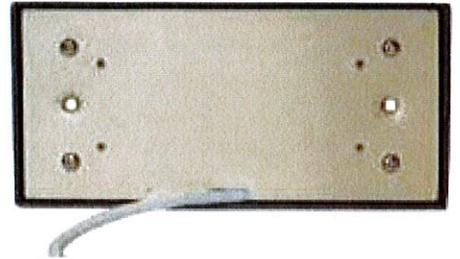

SL35-LED

Integrated Surface Mount Step Light



(Side View)




SL200 and SL300 Features:

- Brass fixture, aged brass finish
- Solid brass face plate with securing screws
- Ceramic bi-pin socket
- 25 Foot wire lead, 16 awg (*UL listed*), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Optional metal set box included
- Lifetime warranty on fixture housing
- Available without a lamp

(Back View)



(Side View)



SL200-LED

(LBIPIN-LED-200lm lamp included)

SL300-LED

(Two LBIPIN-LED-200lm lamps included)